


Short form SENSORS

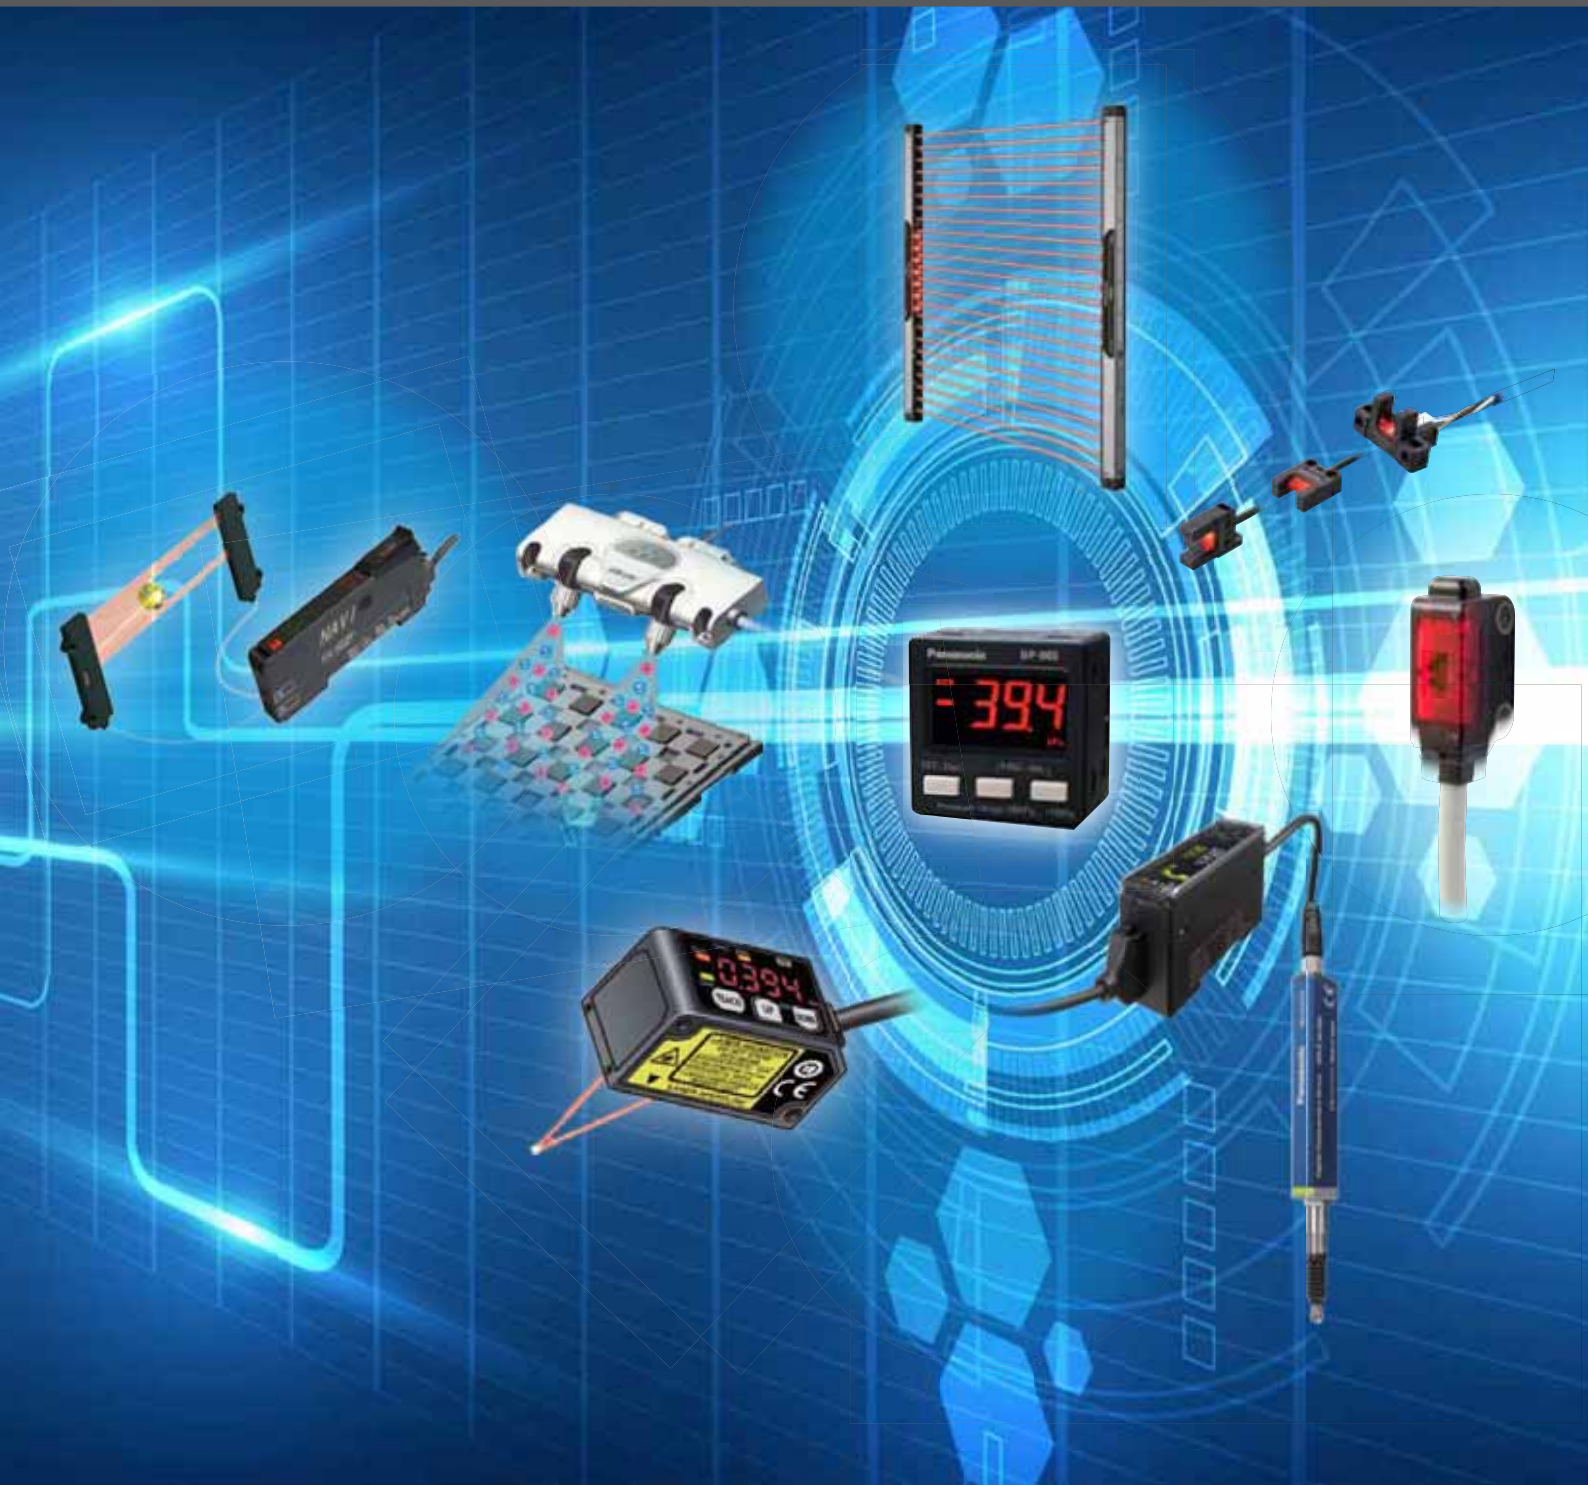


A new performance class of innovative sensor technology

The delivery program: innovative and extensive. Besides through-beam and retroreflective types, reflective sensors and optical fiber photoelectric sensors, we also offer laser and eddy current and contact analog sensors that provide precise measurement results even in the most complicated of applications.

Our delivery program also includes safety sensors, photoelectric sensors for special applications, inductive proximity switches and miniature pressure sensors for relative or differential pressure measurement, and ionizers for Electro Static Discharge (ESD) applications. We also adapt sensors to customized needs.




Application range



Electronics



Automotive



Woodworking industry



Packaging industry




Glass/Wafer production



People counting



Automotive quality measurement






Electronic part discharging

Service has priority

We are constantly striving to optimize our service sector to enable us to react quickly to customer requests. Whether you have specific application requests or simply want technical information, – we are always ready to advise and assist you; you only have to call. Our current delivery program is assembled for you in this sensor overview. Besides the most important techni-

cal data, you will find numerous illustrations of possible applications. Of course, detailed data sheets are available for download on our website www.panasonic-electric-works.com. Our product managers, sales and application engineers will be happy to advise you.

	Page		Page
Photoelectric Sensors / Standard Sensors	4	Safety Sensors	66
CX-400	4	ST4	66
NX5	8	SF2B	68
CY-100	10	SF2C	70
Photoelectric Sensors / Miniature Sensors	12	SF4B (V2)	72
EX-Z	12	SF4B-C	75
EX-10	14	SF4C	77
EX-20	16	SD3-A1	79
EX-30	18	SQ4	81
PM-25/45/65 	20	Safety switches	83
PM2	23	SF-C21	85
Photoelectric Sensors / Trigonometric Sensors	25	SF-C10	86
EQ-500	25	Pressure & Flow Sensors	88
EQ-30	27	DP-0	88
MQ-W	28	DP-100	90
Photoelectric Sensors / Area Sensors	29	DPC-100/	
NA1-11	29	DPH-100	92
NA1-PK5/ NA1-PK3	31	DPC-L100 / DPH-L100	94
Fiber-optic Sensors	34	FM-200	96
FX-100	34	Inductive Proximity Sensors	98
FX-301	36	GX-M	98
FX-311	38	GX-F/H	100
FX-500/550 	39	Measurement Sensors	102
Standard Fibers	42	HG-S 	102
Fibers with integrated high-precision plug	42	HG-C	104
Threaded fibers	44	HL-G1	106
Square head fibers	45	HL-C2	108
Cylindrical fibers	46	HL-T1	110
Fibers with sleeve	47	GP-X	112
Flat fibers	48	Ionizers/Electrostatic Sensors	114
Wide beam fibers	49	ER-Q	114
Convergent reflective fibers for glass detection	50	ER-F	115
Heat-resistant fibers	51	ER-X	117
Chemical-resistant fibers	52	ER-TF	119
Vacuum-resistant fibers	52	ER-VW	121
Fibers for liquid leak/liquid detection	53	ER-V	123
Fiber Sensors Communication Units	56	EC-G	125
Mark Sensors	58	EF-S1	126
LX-100	58	Accessories	127
Laser Sensors	60	Index	130
EX-L200	60	Further Panasonic products	134
LS-400	62		
LS-500	64		

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index



CX-400

A full lineup of world standard
photoelectric sensors

Features

■ Great lineup of 170 models

The **CX-400** series has a high level of basic functionality and excellent cost performance. Moreover, a wide number of variations means that there is sure to be a sensor that fits your needs.

Type	Sensing range
CX-412 □ Thru-beam (long sensing range)	15m
CX-411 □ Thru-beam	10m
CX-493 □ Retroreflective (long sensing range)	5m
CX-491 □ Retroreflective (with polarizing filters)	3m
CX-482 □ Retroreflective (transparent object sensing)	0.1 – 2m
CX-481 □ Retroreflective (transparent object sensing)	50 – 500mm
CX-422 □ Diffuse reflective (800mm type)	800mm
CX-421 □ Diffuse reflective (300mm type)	300mm
CX-424 □ Diffuse reflective (100mm type)	100mm
CX-423 □ Diffuse reflective (narrow-view)	70 – 200mm
CX-442 □ Adjustable range reflective	20 – 300mm
CX-444 □ Adjustable range reflective	15 – 100mm
CX-443 □ Adjustable range reflective	2 – 50mm
CX-441 □ Adjustable range reflective (small spot)	2 – 50mm


Output	NPN, PNP
Connecting method (note 1)	Cable type, M8 plug-in connector type, M12 pigtailed type
Cable length of cable type (note 2)	0.5m, 2m, 5m

Notes:

- 1.) Only the cable type and M8 plug-in connector type are available for the adjustable range reflective type.
- 2.) Only the 2m cable length type (standard) is available for the adjustable range reflective type.


■ Compact size

The sensors are compact in size at 11.2x31x20mm (WxHxD). The mounting pitch is also at the world standard size of 25.4mm.




■ Less processing

M8 plug-in connector type and M12 pigtailed type are available. This contributes to less time spent setting up. In addition, cable types are available with the following cable lengths: 0.5m, 2m, and 5m.

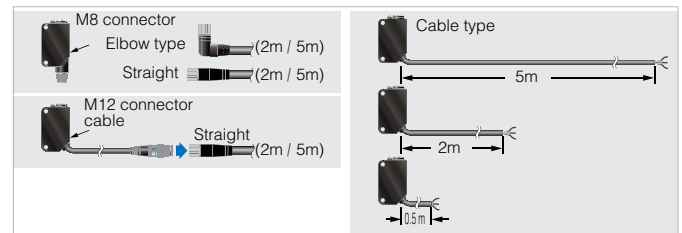

■ Less power consumed

By relentlessly developing our technologies, we have been able to considerably reduce our sensors' power consumption.

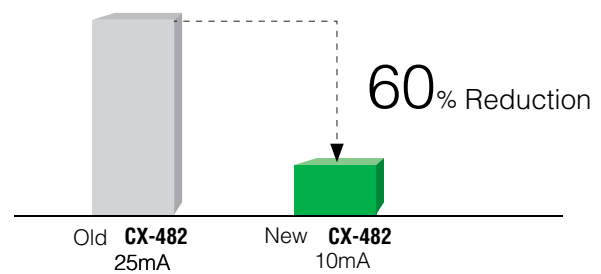

■ Less resources used

Based on environmental considerations, simplified packaging is used in order to reduce waste.

In addition, the bag is made of polyethylene, which produces no toxic gases even when burned.

CX-41□/42□/49□

Strong against oil and coolant liquids

The lens material for the thru-beam type, retroreflective type (excluding the CX-48□) and the diffuse reflective type is made of a strong acrylic that resists the harmful effects of coolants. These sensors can be used with confidence even around metal processing machinery that disperses oil mists. The protection mechanism also conforms to IP67 (IEC).

CX-44□/48□

Strong against ethanol

A strong, ethanol-resistant polycarbonate is used for the front and display covers. Safe even for installing near food processing machinery that disperses ethanol-based detergents. The protection mechanism also conforms to IP67 (IEC).

Strong against interference

The interference prevention function allows two sensors to be mounted close together.

Typical applications


Detecting cars on conveyor lines




Detecting transparent bottles



Detecting labels




Detecting transparent glass bottles



Thru-beam type CX-412□

Strong infrared beam

It realizes a 15m long-distance sensing range. Remarkable penetrating power enables applications such as package content detection.



Retroreflective type CX-493□

Strongest sensing range in its class

A long 5m sensing range is possible with the red LED type that is easy to align with the beam axis. Can be used for wide automatic door shutters.



Diffuse reflective type CX-423□

Beam axis alignment made easy

These sensors realize a high luminance red LED spot that provides bright visibility enabling the sensing position to be checked at a glance. Because it has the small spot, approx. 2mm, even the minutest object can be accurately detected.



CX-481□/482□

Introducing the transparent object sensing type sensor


Our unique optical system and transparent object sensing circuitry provide stable sensing of even thinner transparent objects than the conventional models.



CX-441/443□

Can sense differences as small as 0.4mm, with hysteresis of max. 2%


An advanced optical system provides sensing performance that is approx. 2.5 times more precise than conventional models. Even ultra small differences of 0.4mm can be detected accurately.



CX-44□

Not affected by color

Both black and white objects can be sensed at almost the same distances. No adjuster control is needed, even when products of different colors are moving along the production line.




CX-442□

BGS/FGS functions make even the most challenging settings possible!

Background suppression BGS

When object and background are separated.



CX-483□

Foreground suppression FGS

When object and background are close together.

When the object is glossy or uneven.



- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index

CX-400

Technical specifications

Photoelectric Sensors
Fiber-optic Sensors
Standard Fibers
Fiber Sensors Communication Units
Mark Sensors
Laser Sensors
Safety Sensors
Pressure & Flow Sensors
Inductive Proximity Sensors
Measurement Sensors
Ionizers / Electrostatic Sensors
Accessories
Index
CX-400

Type		Thru-beam			Retroreflective				
		Long sensing range			With polarizing filter	Long sensing range	For transparent object sensing		
Model no.	NPN output	CX-411(-Z) (note 1)	CX-412(-Z)	CX-413(-Z)	CX-491(-Z)	CX-493(-Z)	CX-481(-Z)	CX-483(-Z)	CX-482(-Z)
	PNP output	CX-411-P(-Z)	CX-412-P(-Z)	CX-413-P(-Z)	CX-491-P(-Z)	CX-493-P(-Z)	CX-481-P(-Z)	CX-483-P(-Z)	CX-482-P(-Z)
Sensing range		10m	15m	30m	3m (note 2)	5m (note 2)	50 to 500mm (note 2)	50 to 1.0m (note 2)	0.1 to 2m (note 2)
Object to be sensed		Min. Ø 12mm (opaque)			Min. Ø 50mm (opaque, transparent) (note 2)	Min. Ø 50mm (opaque, transparent or specular) (note 2)			
Hysteresis		-							
Supply voltage		12 to 24VDC ±10%							
Output		PNP / NPN open-collector transistor, max. 100mA							
Output operation		Switchable either Light-ON or Dark-ON							
Response time		Max. 1ms		Max. 2ms	Max. 1ms				
Emitting element		Red LED	Infrared LED		Red LED			Infrared LED	
Automatic interference prevention function		Two units of sensors can be mounted close together with interference prevention filters. (Sensing range: 5m)		-	Incorporated (two sensor units can be mounted close together.)				
Protection		IP67 (IEC)							
Ambient temperature		-25 to +55°C							
Material		Enclosure: PBT, Lens: Polycarbonate (CX-48□: Polycarbonate), Protection cover: Polycarbonate (CX-48□: Polycarbonate)							
Connection method		2m cable, Suffix - Z: M8 connector (note 3)							
Dimensions (HxWxD)		31x11.2x20mm (-Z connector type: 35.5x11.2x20mm)							
Accessories		-			Reflector: RF-230 1 pc.				

Notes:

- 1.) Suffix -Z = M8 connector type
- 2.) The sensing range is specified for the attached reflector **RF-230**
- 3.) Cable is not included in delivery. Please select under accessories (page 127)

Type		Diffuse reflective				Adjustable range reflective (note 2)			
					Narrow view	Small spot			
Model no.	NPN output	CX-424(-Z) (note 1)	CX-421(-Z)	CX-422(-Z)	CX-423(-Z)	CX-441(-Z)	CX-443(-Z)	CX-444(-Z)	CX-442(-Z)
	PNP output	CX-424-P(-Z)	CX-421-P(-Z)	CX-422-P(-Z)	CX-423-P(-Z)	CX-441-P(-Z)	CX-443-P(-Z)	CX-444-P(-Z)	CX-442-P(-Z)
Sensing range		100mm	300mm	800mm	70 to 300mm	2 to 50mm (adjustable range: 20-50mm)		15 to 100mm (adjustable range: 20-100mm)	20 to 300mm (adjustable range: 40-300mm)
Object to be sensed		Opaque, transparent				-			
Hysteresis		Max. 15% of sensing range				Max. 2% of sensing range			Max. 5% of sensing range
Supply voltage		12 to 24VDC ±10%							
Output		PNP / NPN open-collector transistor, max. 100mA							
Output operation		Switchable either Light-ON or Dark-ON							
Response time		Max. 1ms							
Emitting element		Infrared LED			Red LED	Red LED			
Automatic interference prevention function		Incorporated (two sensor units can be mounted close together.)							
Protection		IP67 (IEC)							
Ambient temperature		-25 to +55°C							
Material		Enclosure: PBT, Lens: Polycarbonate (CX-48□: Polycarbonate), Protection cover: Polycarbonate (CX-48□: Polycarbonate)							
Connection method		2m cable, Suffix - Z: M8 connector (note 3)							
Dimensions (HxWxD)		31x11.2x20mm (-Z connector type: 35.5x11.2x20mm)							

Notes:

- Suffix -Z = M8 connector type
- FGS = Foreground suppression
BGS = Background suppression
Selectable by wiring the inputs correspondingly
- Cable is not included in delivery. Please select under accessories (page 127)

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

CX-440



NX5

Sensor usable world-wide

Features

Multi-voltage

24 to 240VAC and 12 to 240VDC, suitable for supply voltages all over the world.

High reliability


The hermetically sealed output relay significantly increases its reliability.

Interference prevention


Two sensors operate normally even when mounted close together (excluding the 30m thru-beam type sensor).

Long sensing range

Suitable for conveyor lines and parking lot applications.




Hermetically sealed relay eliminates worries about bad contact

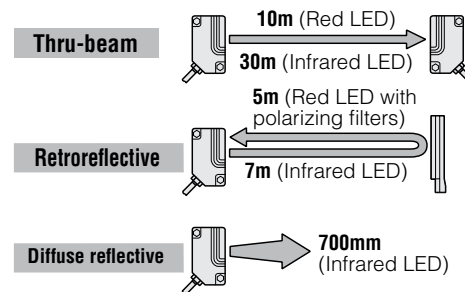

Typical applications


Multistoried parking

Detects if the car is protruding from the elevator door.




Golf driving range

The sensor detects the presence of a golf ball. The sensor is multi-voltage type so no DC power supply is needed.




Arresting shutter closing

The long sensing range sensor with a visible red beam can be used to control the shutter operation at the gate of a factory.



Arresting door closing

The sensor detects a person or an object and prevents the door from closing as long as its beam is interrupted.



Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors


Accessories

Index

NX5

Technical specifications

Type	Thru-beam				Retroreflective				Diffuse reflective	
			Long sensing range		With polarizing filters		Long sensing range			
Model no.	NX5-M10RA	NX5-M10RB	NX5-M30A	NX5-M30B	NX5-PRVM5A	NX5-PRVM5B	NX5-RM7A	NX5-RM7B	NX5-D700A	NX5-D700B
Sensing range	10m		30m		0.1 to 5m (note 1)		0.1 to 7m (note 1)		700mm (note 2)	
Object to be sensed	Min. Ø 20mm (opaque transparent) (note 3)				Min. Ø 50mm (opaque, semi-transparent or transparent) (note 1, 3)		Min. Ø 50mm (opaque or translucent) (note 1, 3)		Opaque, semitransparent or transparent (note 3)	
Hysteresis	—								Max. 15% of sensing range	
Repeatability (perpendicular to sensing axis)	Max. 0.1mm		Max. 0.2mm				Max. 0.3mm			
Supply voltage	24 to 240VAC ± 10%, or 12 to 240VDC ± 10%									
Power consumption	Emitter: max. 1VA Receiver: max. 2VA		Emitter: max. 1.5VA Receiver: max. 2VA		Max. 2VA					
Output	Relay contact 1c Switching capacity: 250V AC 1A (resistive load) 30VDC 2A (resistive load) Electrical life: Min. 500000 switching operations (switching frequency 3600 operations/hour) Mechanical life: Min. 100 million switching operations (switching frequency 36000 operations/hour)									
	Output operation	Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON
Response time	Max. 10ms									
Power indicator	—		Red LED (lights up when the power is ON)			—				
Sensitivity adjuster	Continuously variable adjuster		—		Continuously variable adjuster		—		Continuously variable adjuster	
Automatic interference prevention function	Use optional interference prevention filters		—		Incorporated (two sensor units can be mounted close together.)					
Protection	IP66 (IEC)									
Ambient temperature	-20 to +55°C									
Emitting element	Red LED		Infrared LED		Red LED		Infrared LED			
Material	Enclosure: Polycarbonate; lens: polycarbonate; cover: polycarbonate; front cover (retroreflective type sensor only): Acrylic									
Connection method	5-core (thru-beam type emitter: 2 cable) cable, 2m									
Dimensions (HxWxD)	62x18x35mm									
Accessories	Adjusting screwdriver: 1 pc.		—		Reflector RF-230 : 1 pc. Adjusting screwdriver: 1 pc.		Reflector RF-230 : 1 pc.		Adjusting screwdriver: 1 pc.	

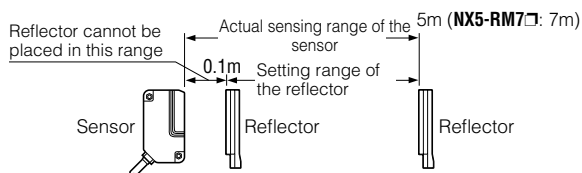

Notes:

- 1.) The sensing range and the object to be sensed of the retroreflective type sensor is specified for the **RF-230**. Further, the sensing range is the possible setting range for the reflector. The sensor can also detect an object 0.1m, or more, away.
- 2.) The sensing range is specified for white non-glossy paper (200x200mm).
- 3.) Check the functionality with a real object.

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

NX5



CY-100

Simple mounting with M18 thread

Features

■ Wide product range

The availability of a wide range of models within the series means the **CY-100** sensors can solve relatively complex tasks. Types with integrated polarization filters can even recognize reflective objects. The side view type makes applications possible in cramped spaces.

■ M18 Thread

All models have an M18 male thread for easy and quick mounting. Furthermore the models are also available for the M12 connector type. You can easily replace and add these standard models. The nuts are included in delivery.

■ Long sensing range


The thru-beam and retroreflective types of the CY-100 have a large sensing range of up to 15m.

■ Environmentally robust


Thanks to the IP67 (IEC) casing, the sensor is suitable for installation in humid and dusty environments. Integrated status LEDs allow the operator to check the function of the sensor at a glance.

Typical applications


Object detection



Detecting specular objects



Object counting



Technical specifications

Standard type

Type		Thru-beam		Retroreflective type (note 3)				Diffuse			
		-		-		With polarizing filter		-		With sensitivity adjuster	
		Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON	Dark-ON
Model no.	NPN output	CY-111A (-Z) (note 1)	CY-111B (-Z)	CY-192A (-Z)	CY-192B (-Z)	CY-191A (-Z)	CY-191B (-Z)	CY-121A (-Z)	CY-121B (-Z)	CY-122A (-Z)	CY-122B (-Z)
	PNP output	CY-111A-P (-Z)	CY-111B-P (-Z)	CY-192A-P (-Z)	CY-192B-P (-Z)	CY-191A-P (-Z)	CY-191B-P (-Z)	CY-121A-P (-Z)	CY-121B-P (-Z)	CY-122A-P (-Z)	CY-122B-P (-Z)
Sensing range		15m		4m		2m		100mm (note 2)		600mm (note 2)	
Object to be sensed		Min. Ø 18mm (opaque)		Min. Ø 50mm (opaque, transparent) (note 1)		Min. Ø 50mm (opaque, transparent or specular) (note 1)		Opaque, transparent			
Supply voltage		12 to 24VDC ±10%									
Output		PNP / NPN open-collector transistor, max. 100mA									
Response time		Max. 1ms									
Emitting element		Infrared LED				Red LED		Infrared LED			
Protection		IP67 (IEC)									
Ambient temperature		-25 to +55°C									
Material		Enclosure: PBT, Lens: PMMA									
Connection method		2m cable, Suffix - Z: M12 connector (note 4)									
Dimensions (HxWxD)		M18x46mm, -Z connector type: M18x60mm				M18 x 48mm, -Z connector type: M18x62mm		M18x46mm, -Z connector type: M18x60mm		M18x62mm, -Z connector type: M18x76mm	
Accessories		Nuts 4 pcs.		Nuts 2 pcs.						Nuts 2 pcs. Screwdriver 1pc.	

Side sensing

Type		Thru-beam		Retroreflective type (note 3)				Diffuse				
		-		-		With polarizing filter		-		With sensitivity adjuster		
		Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON	Dark-ON	
Model no.	NPN output	CY-111VA(-Z) (note 1)	CY-111VB(-Z)	CY-192VA(-Z)	CY-192VB(-Z)	CY-191VA(-Z)	CY-191VB(-Z)	CY-121VA(-Z)	CY-121VB(-Z)	CY-122VA(-Z)	CY-122VB(-Z)	
	PNP output	CY-111VA-P(-Z)	CY-111VB-P(-Z)	CY-192VA-P(-Z)	CY-192VB-P(-Z)	CY-191VA-P(-Z)	CY-191VB-P(-Z)	CY-121VA-P(-Z)	CY-121VB-P(-Z)	CY-122VA-P(-Z)	CY-122VB-P(-Z)	
Sensing range		15m		4m		2m		100mm (note 2)		600mm (note 2)		
Object to be sensed		Min. Ø 18mm (opaque)		Min. Ø 50mm (opaque, transparent) (note 1)		Min. Ø 50mm (opaque, transparent or specular) (note 1)		Opaque, transparent				
Supply voltage		12 to 24V DC ±10%										
Output		PNP / NPN open-collector transistor, max. 100mA										
Response time		1ms										
Emitting element		Infrared LED				Red LED		Infrared LED				
Protection		IP67 (IEC)										
Ambient temperature		-25 to +55°C										
Material		Enclosure: PBT, Lens: PMMA										
Connection method		2m cable, Suffix - Z: M12 connector (note 4)										
Dimensions (ØxD)		M18x62mm, -Z connector type: M18x76mm						M18x46mm, -Z connector type: M18x60mm	-	M18x78mm, -Z connector type: M18x92mm		
Accessories		Nuts 4 pcs.		Nuts 2 pcs.						Nuts 2 pcs. Screwdriver 1 pc.		

Notes:

Suffix -Z = M12 connector type

- 1.) The sensing range and object to be sensed of the retroreflective type are specified for the reflector **RF-420** (accessories page 128)
- 2.) The sensing range is specified for white, matt paper
- 3.) The reflector is not included in delivery; please order separately (accessories page 128)
- 4.) Cable not included in delivery; please order separately (accessories page 127)

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors
Communication Units

Mark Sensors

Laser Sensors


Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

CY-100

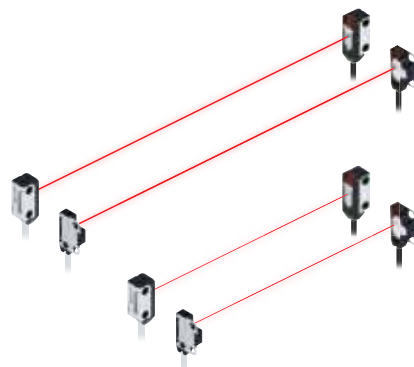

EX-Z

Miniature thru-beam sensor with built-in amplifier

Features

■ Smallest laser sensor with a built-in amplifier

The extreme thinness of 3mm of the EX-Z series has been achieved by utilizing a new semiconductor packaging technology that does not use wire bonding. The small unit size allows the installation of sensors in a narrow space where only a conventional fiber sensor head could be installed before. As opposed to a fiber sensor, the EX-Z has a built-in amplifier, which also saves on installation space.

Front sensing


Approx.
50% smaller
than EX-10

EX-Z1□F□
H14×W8×D3 mm

Side sensing

Approx.
35% smaller
than EX-10

EX-Z1□
H15.9×W5.5×D6.5 mm

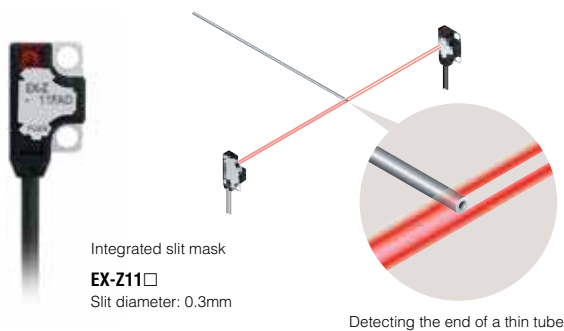

■ Easy to install

The clearly visible red light beam makes installation and beam alignment very simple. The 4-element LED provides a stable strong light over a long period of time.

■ Great performance in an industrial environment

With IP67 degree of protection, the EX-Z can be installed in environments where water is used or splashed¹. For this type of application, there are rustproof mounting brackets available in stainless steel and plastic.

¹ If water splashes on the sensor during sensing operation, the sensor may detect the water as an object

■ Sensing extremely small objects

Thanks to the integrated slit mask, the sensor can detect objects with a diameter of as little as 0.3mm. Even at a distance of 500mm, the sensor is capable of reliably detecting objects as small as 1mm.


Clearly
visible spot



Detection of parts in parts feeder




Detection of presence / absence of test tubes



Detection of LED contacts



Mounted on robot arm



Technical specifications

Standard type

Type		Thru-beam					
		Front sensing			Side sensing		
Model number	Light-ON	EX-Z11FA (-P) (note)	EX-Z12FA (-P)	EX-Z13FA (-P)	EX-Z11A (-P)	EX-Z12A (-P)	EX-Z13A (-P)
	Dark-ON	EX-Z11FB (-P)	EX-Z12FB (-P)	EX-Z13FB (-P)	EX-Z11B (-P)	EX-Z12B (-P)	EX-Z13B (-P)
Sensing range		50mm	200mm	500mm	50mm	200mm	500mm
Object to be sensed		Min. Ø 0.3mm	Min. Ø 0.5mm	Min. Ø 1.0mm	Min. Ø 0.3mm	Min. Ø 0.5mm	Min. Ø 1.0mm
Supply voltage		12 to 24V DC ±10%					
Output		NPN / PNP open-collector transistor, max. 20mA					
Response time		Max. 0.5ms					
Degree of protection		IP67 (IEC)					
Ambient temperature		-10 to +55°C					
Connection method		2m cable					
Dimensions (HxWxD)		14x8x3mm			15.5x5.5x6.5mm		
Accessories		Mounting screws, 1 set					

Note:
Suffix P= PNP output
No suffix = NPN type

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

EX-Z

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

EX-10




EX-10

The slimmest: 3.5mm thick

Features

■ Optimized precision optics

The enhanced EX-10 series offers a more precise light beam compared with the other standard models. Now you can realize an even more space saving installation, because no additional tools like slit masks are needed to prevent interferences. It is no problem to detect smallest objects with a diameter of 0.5mm.

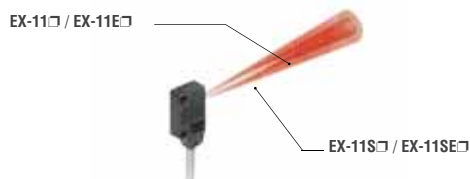

■ Sensing range 1m: EX-19□

■ High-speed response time: 0.5ms

The sensor EX-10 with a response time of only 0.5ms is especially suitable for detecting small and high-speed traveling objects.

■ Flexible setup


The EX-10 sensor is available as front sensing or side sensing type, allowing for flexible mounting in the narrowest of spaces.

■ 2-color indicator

A convenient bright, 2-color indicator has been incorporated in the miniature body. You can check the available power supply and current output operation at a glance.




■ Freely mountable fingertip size




Freely mountable; dimensions 10x14.5x3.5mm (WxHxD) (Thru-beam type, front sensing). Moreover, easy alignment is possible with the visible red LED beam source.

Typical applications


Detecting the float for a flow meter




Seating confirmation fiber



Detecting small parts such as screws



Sensing PCB rack screws



Technical specifications

Type		Thru-beam						Convergent reflective	
Model no.	Front sensing	EX-11A(-PN) (note)	EX-11B(-PN)	EX-13A(-PN)	EX-13B(-PN)	EX-19A(-PN)	EX-19B(-PN)	EX-14A(-PN)	EX-14B(-PN)
	Side sensing	EX-11EA(-PN)	EX-11EB(-PN)	EX-13EA(-PN)	EX-13EB(-PN)	EX-19EA(-PN)	EX-19EB(-PN)	–	–
Sensing range		150mm		500mm		1m		2 to 25mm (conv. point: 10mm)	
Object to be sensed		Min. Ø 1mm (opaque)		Min. Ø 2mm (opaque)				Min. Ø 0.1mm copper wire (Setting distance: 10mm)	
Supply voltage		12 to 24V DC ± 10 %							
Output		PNP/NPN open-collector transistor, max. 50mA							
Output operation		Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON	Dark-ON	Light-ON	Dark-ON
Response time		Max. 0.5ms							
Protection		IP67 (IEC)							
Ambient temperature		-25 to +55°C							
Connection method		2m cable							
Dimensions (HxWxD)		14.5x10x3.5mm						13x14.5x3.5mm	
Accessories		Mounting screws, 1 set							

Note:
 Suffix -PN = PNP type
 No suffix = NPN type

Narrow-view reflective type

Type		Thru-beam				
Model no.	Light-ON	EX-11SA(-PN) (note)	EX-11SEA(-PN)	EX-13SA(-PN)	EX-13SEA(-PN)	EX-19SA(-PN)
	Dark-ON	EX-11SB(-PN)	EX-11SEB(-PN)	EX-13SB(-PN)	EX-13SEB(-PN)	EX-19SB(-PN)
Sensing range		150mm		500mm		1m
Object to be sensed		Min. Ø 0.5mm (opaque)	Min. Ø 1.0mm (opaque)	Min. Ø 1.0mm (opaque)	Min. Ø 2.0mm (opaque)	Min. Ø 2.0mm (opaque)
Supply voltage		12 to 24V DC ±10%				
Output		PNP/NPN open-collector transistor, max. 50mA				
Response time		Max. 0.5ms				
Protection		IP67 (IEC)				
Ambient temperature		-25 to +55°C				
Connection method		2m cable				
Dimensions (HxWxD)		14.5x10x3.5mm				
Accessories		Mounting screws, 1 set				

Note:
 Suffix -PN = PNP type
 No suffix = NPN type

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors
Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

EX-10

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

EX-20



EX-20

Miniature-sized and still mountable
with M3 screws

Features

■ Long sensing range



The **EX-20** series achieves long distance sensing [thru-beam type: 2m, retroreflective type: 200mm (when using the attached reflector), diffuse reflective type: 160mm], despite its miniature size. Hence, it is usable even on a wide conveyor.

■ Clear beam spot using red LED dot light source

The emission area of a dot light source is smaller than that of a conventional LED flat light source. It is possible to design a high power, narrow beam. Since a red LED dot light source is used, the red beam spot is clearly visible even at a long distance so that the alignment and confirmation of the sensing position is easy.

■ Less power consumed!


By relentlessly developing our technologies, we have been able to considerably reduce our sensors' power consumption.

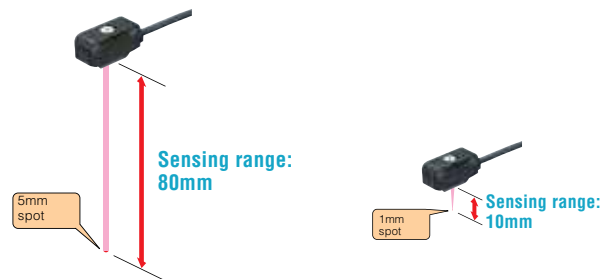

Typical applications


Checking protrusion of wafer

The ultra compact photoelectric sensor EX-23 has a sufficiently long sensing range of 2m. Further, its visible red LED beam makes beam alignment very easy.




Detecting tape feeder cassette out of position

Ultra compact in size with an ample sensing range of 2m, ideal for monitoring tape feeder cassettes that are out of position.



Detecting fill-up of parts in feeder

The sensor setting can be finely adjusted since a universal sensor mounting bracket is available, with which the height and the angle of the sensor can be freely adjusted.



Technical specifications

Type		Thru-beam		Retroreflective	Diffuse reflective type			
					Standard type	Diffuse beam	Small spot beam	Long distance spot beam
		Front sensing	Side sensing	Side sensing	Side sensing	Front sensing	Side sensing	Side sensing
Model no.	Light-ON	EX-21A(-PN) (note)	EX-23(-PN) Light-ON/ Dark-ON switchable	EX-29A(-PN)	EX-22A(-PN)	EX-24A(-PN)	EX-26A(-PN)	EX-28A(-PN)
	Dark-ON	EX-21B(-PN)		EX-29B(-PN)	EX-22B(-PN)	EX-24B(-PN)	EX-26B(-PN)	EX-28B(-PN)
Sensing range		1m	2m	30 to 200mm	5 to 160mm	2 to 25mm (Conv. point: 10mm)	6 to 14mm (Conv. point: 10mm)	45 to 115mm
Object to be sensed		Min. Ø 2.6mm (opaque)	Min. Ø 3mm (opaque)	Min. Ø 15mm opaque or translucent object	Opaque, translucent or transparent object	Min. Ø 0.1mm copper wire (Setting distance: 10mm)		Opaque, translucent or transparent object
Supply voltage		12 to 24VDC ± 10%						
Output		PNP / NPN open-collector transistor, max. 50mA						
Response time		Max. 0.5ms						
Protection		IP67 (IEC)						
Ambient temperature		-25 to +55°C						
Connection method		Cable 2m						
Dimensions (HxWxD)		18x16x4.5mm	8.2x22x10.5mm	8.2x25x12.3mm		16x18x4.5mm	8.2x25x12.3mm	10x14.5x3.5mm
Accessories		–	Screwdriver, 1 pc.	Reflector RF-200 , 1 pc. Screwdriver, 1 pc.	Screwdriver, 1 pc.	–	Screwdriver, 1 pc.	

Note:
Suffix -PN = PNP type
No suffix = NPN type

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

EX-20

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

EX-30



EX-30

An alternative to fiber sensors

Features

■ An alternative to fiber sensors


The **EX-30** series can be screw-mounted (M4 for thru-beam type, M6 for reflective type). This means that they can be inserted into production lines in exactly the same way as conventional fiber sensors.

■ 800mm thru-beam type available

The sensing range is 1.5 times greater than previous models! It also has a sensitivity adjuster to enable compatibility with a wide range of applications.

■ Less power consumed!


By relentlessly developing our technologies, we have been able to considerably reduce our sensors' power consumption.



Typical applications


Detecting quantity of labels in label magazine

Detects the remaining amount of labels by the thickness of the roll.




Detecting ICs

Detects whether ICs are accurately placed in IC trays.



Resin bottle detection

The EX-32A threaded photoelectric sensor confirms the arrival of bottles.



Technical specifications

Type		Thru-beam			Diffuse reflective		
Model no.	NPN output	EX-31A	EX-31B	EX-33	EX-32A	EX-32B	
	PNP output	EX-31A-PN	EX-31B-PN	EX-33-PN	EX-32A-PN	EX-32B-PN	
Sensing range		500mm			800mm	50mm	
Object to be sensed		Min. 2mm (or opaque)			Opaque, translucent or transparent object		
Supply voltage		12 to 24VDC \pm 10%					
Output		PNP / NPN open-collector transistor, max. 50mA					
Output operation		Light-ON	Dark-ON	Variable switching method	Light-ON	Dark-ON	
Response time		Max. 0.5ms					
Protection		IP67 (IEC)					
Ambient temperature		-25 to +55°C					
Connection method		Cable 2m					
Dimensions (HxWxD)		14x15.6x18mm					
Accessories		Nuts, 2 pcs.; washers, 2 pcs.			Nut, 1 pc.; washer, 1 pc.		

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors
Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

EX-30

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

PM-25/45/65




PM-25/45/65

Enables equipment miniaturization
and quick construction

Features


■ Increased beam emitting / receiving distance of 6mm

The beam emitting and receiving sections are 0.5mm thinner compared to our conventional models although the external dimensions have not changed. As a result, the distance between the beam-emitting and the beam-receiving point increased by 1mm. The wider distance means less possibility of collision with the object to be sensed.



■ Beam marks for easy adjustment

There are marks on the front and back of the sensor to indicate the upper and the lower limit of the beam axis. This makes it easy to adjust the position of the object to be sensed.

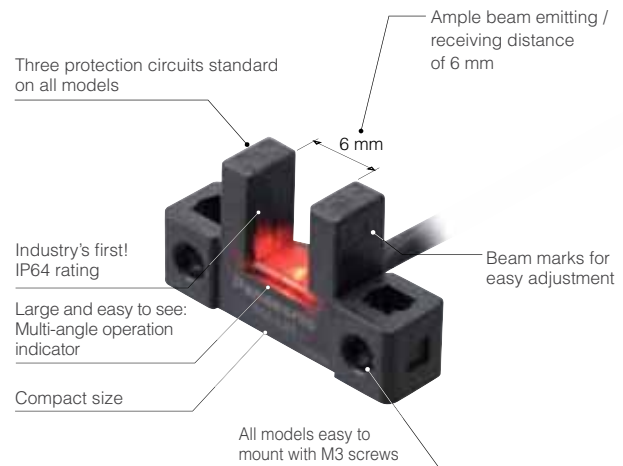


■ Large and easy-to-see operation indicator


The large operation indicator (orange) lights up when an object enters the beam axis. The indicator is easy to see from any angle – even from above and from the sides.

Typical applications

Positioning of a pallet

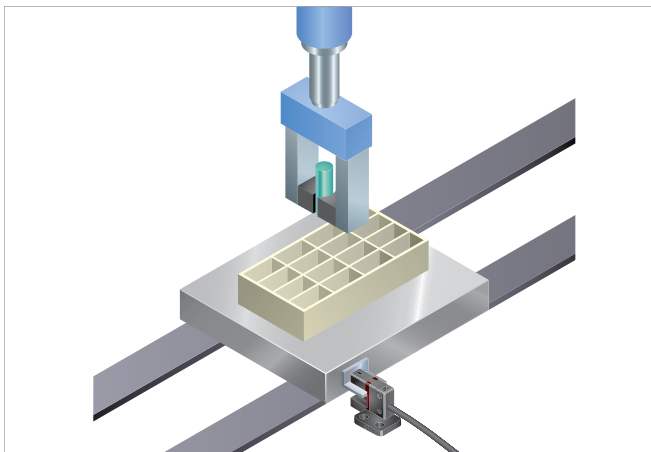

Sensing the starting point on a rotating body

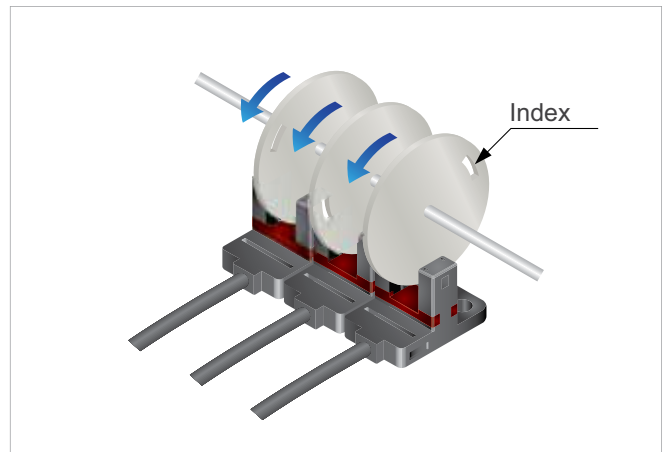

Order guide

Type	Dimensions (mm)	Model no.
Ultrasmall / Cable type		PM-K25
		PM-K25-R
		PM-K25-C3
		PM-K25-P
		PM-L25
		PM-L25-R
		PM-L25-C3
		PM-L25-P
		PM-F25
		PM-F25-R
		PM-F25-C3
		PM-F25-P
	PM-R25	
	PM-R25-R	
	PM-R25-C3	
	PM-R25-P	
	PM-U25	
	PM-U25-R	
	PM-U25-C3	
	PM-U25-P	

Type	Dimensions (mm)	Model no.
Compact / Cable type		PM-K45
		PM-K45-C3
		PM-K45-P
		PM-K45-P-C3
		PM-T45
		PM-T45-C3
		PM-T45-P
		PM-T45-P-C3
		PM-L45
		PM-L45-C3
		PM-L45-P
		PM-L45-P-C3
	PM-Y45	
	PM-Y45-C3	
	PM-Y45-P	
	PM-Y45-P-C3	
	PM-F45	
	PM-F45-C3	
	PM-F45-P	
	PM-F45-P-C3	
	PM-R45	
	PM-R45-C3	
	PM-R45-P	
	PM-R45-P-C3	

Type	Dimensions (mm)	Model no.
Connector type		PM-K65
		PM-K65-P
		PM-T65
		PM-T65-P
		PM-T65-W
		PM-T45W-P
	PM-L65-P	
		PM-Y65
		PM-Y65-P
		PM-F65
		PM-F65-P
PM-F65W		
PM-F65W-P		
	PM-R65	
	PM-R65-P	
	PM-R65W	
	PM-R65W-P	

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index

PM-25/45/65

Technical specifications

Type		Ultra small type	Small type	
		With cable		Built-in connector
Model no. (note 1)	NPN output	PM-□25(-R) (note 2)	PM□45	PM-□65
	PNP output	PM-□25P	PM□45P	PM-□65P
Fork width		6mm (fix)		
Object to be sensed		0.8 x 1.2mm (opaque)		
Repeatability		0.01mm		
Supply voltage		5 to 24V DC ±10%		
Output		PNP / NPN open-collector transistor, max. 50mA		
Output operation		Incorporated with 2 outputs: Light-ON / Dark-ON		
Response time		Under light incident condition: max. 20μs Under light incident condition: max. 80μs (Response frequency: min. 3kHz)		
Ambient temperature		-25 to +55°C		
Protection		IP64 (IEC)		IP40 (IEC)
Emitting element		Infrared LED		
Connection method		Cable, 1m		Connector (note 3)

Notes:

- 1.) K = K type
L = L type
F = F type
R = R type
U = U type
T = T type
Y = Y type
- 2.) Suffic -R = bending-resistant cable
- 3.) Cable not included in delivery, please order separately (accessories, page 127)

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

PM-25/45/65




PM2

Convergent reflection sensing
ensures stable detection

Features

■ Stable detection by convergent reflective mode

The stable detection characteristics of the **PM2** series are obtained since it is a convergent reflective type and senses a limited area. Thus regardless of the background, stable detection is possible.



■ Not affected by background

Even a specular background does not affect the sensing performance if the sensor is located 30mm away from it (when directly opposite).

■ Dark object detectable


Since the sensor is very sensitive, it can detect even a dark object of low reflectivity.

■ Object to be sensed


A 0.05mm copper wire can be detected at a distance of 5mm.

Typical applications

Minute object detectable




Starting point and overrun is sensed using the dog on the base



Detecting capacitors in tray

The convergent reflective type sensor reliably detects capacitors in a tray without being affected by their color, characters, marks or glossiness.



Photoelectric
Sensors

Fiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow Sensors

Inductive
Proximity
Sensors

Measurement
Sensors

Ionizers/
Electrostatic
Sensors







Accessories

Index

PM2

Technical specifications

Photoelectric Sensors
Fiber-optic Sensors
Standard Fibers
Fiber Sensors Communication Units
Mark Sensors
Laser Sensors
Safety Sensors
Pressure & Flow Sensors
Inductive Proximity Sensors
Measurement Sensors
Ionizers / Electrostatic Sensors
Accessories
Index
PM2

Type		Image	Model no.
Connector type	Top sensing		PM2-LH10
			PM2-LH10B
	Front sensing		PM2-LF10
			PM2-LF10B
	L type (Top sensing)		PM2-LL10
			PM2-LL10B
Cable type	Top sensing		PM2-LH10-C1
			PM2-LH10B-C1
	Front sensing		PM2-LF10-C1
			PM2-LF10B-C1
	L type (Top sensing)		PM2-LL10-C1
			PM2-LL10B-C1

Type	Connector type			Cable type			
	Top sensing	Front sensing	L type (Top sensing)	Top sensing	Front sensing	L type (Top sensing)	
Model no.	Light-ON	PM2-LH10	PM2-LF10	PM2-LL10	PM2-LH10-C1	PM2-LF10-C1	PM2-LL10-C1
	Dark-ON	PM2-LH10B	PM2-LF10B	PM2-LL10B	PM2-LH10B-C1	PM2-LF10B-C1	PM2-LL10B-C1
Sensing range	2.5 to 8mm (conv. point: 5mm) with white non-glossy paper (15x15mm)						
Object to be sensed	Min. Ø 0.05mm copper wire (setting distance: 5mm)						
Repeatability (perpendicular to sensing axis)	0.08mm						
Supply voltage	5 to 24VDC ± 10%						
Output	NPN open-collector transistor, max. 50mA						
Response time	Max. 0.8ms						
Emitting element	Infrared LED						
Connection method	Connector for soldering (note)			Cable, 1m			

Note: Cable is not included in delivery. Please select under accessories (page 127)



EQ-500

Long range sensing capability
up to 2.5m


Features

■ Impervious to variations in color or angle

Due to its advanced optical system, the sensor is not affected by variations in the object's angle or gloss as compared to conventional sensors. Moreover, sensing can be performed at a somewhat constant distance even if the sensing object is black or white.

■ Not affected by background objects

Due to the 2-segment photodiode adjustable range system, the sensor does not detect objects outside the preset sensing field. It will not malfunction even if someone walks behind the sensing object, or machines or conveyors are in the background.




■ An easy-to-set adjuster with indicator

Equipped with a 2-turn adjuster with indicator making it easy to set for short or long distances. **EQ-500** series can function with 24 to 240V AC and 12 to 240V DC. Therefore, almost any power supply anywhere in the world will work.

■ Equipped with BGS/FGS function

We have added a DC-voltage type with NPN and PNP transistor outputs, all in one sensor. Its BFS/FGS function controls any background effects for more stable sensing.

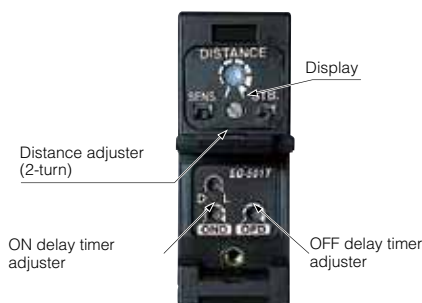

■ Convenient timer function models

Types with an ON-delay/OFF-delay timer available. (EQ-5□T)


- › Operation: ON-delay OFF-delay
- › Timer period: 0.1 to 5s (individual setting possible)

■ Little affected by contamination on lens

Even if the lens surface gets somewhat dirty from dust particles, there is very little change in the operation field, rendering stable and consistent detection even for particles appearing close to the front surface of the unit.

■ Convenient terminal block type

Cabling is enabled by way of a terminal block.

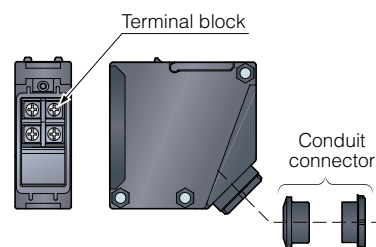

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index

Technical specifications

Type	Multi-voltage type				DC-voltage			
		With timer		With timer		With timer		With timer
Model no.	EQ-501	EQ-501T	EQ-502	EQ-502T	EQ-511	EQ-511T	EQ-512	EQ-512T
Sensing range	0.2 to 2.5m		0.2 to 1.0m		0.2 to 2.5m		0.2 to 1.0m	
Supply voltage	24 to 240V AC \pm 10%, or 12 to 24VDC \pm 10%				12 to 24VDC \pm 10%			
Output	Relay contact 1a 3A/250VAC				PNP / NPN open-collector transistor, max. 100mA			
Output operation	Light-ON or Dark-ON							
Response time	Max. 20ms (for EQ-50□T dependent on the setting timer period)				Max. 20ms (for EQ-51□T dependent on the setting timer period)			
Timer periods	–	Incorporated with variable ON-delay / OFF-delay timer (0.1 to 5s)	–	Incorporated with variable ON-delay / OFF-delay timer (0.1 to 5s)	–	Incorporated with variable ON-delay / OFF-delay timer (0.1 to 5s)	–	Incorporated with variable ON-delay / OFF-delay timer (0.1 to 5s)
Protection	IP67 (IEC)							
Ambient temperature	–20 to +55°C							
Emitting element	Infrared LED							
Connection method	Convenient terminal block							
Dimensions (HxWxD)	68x26x68mm							
Accessories	Screwdriver, 1 pc.							



EQ-30

Unaffected by color or material,
2m distance adjustable
fixed-focus sensing

Features

- Not affected by object color or background
- Long sensing range 2m
- Compact size

The **EQ-30** saves space since a miniaturized housing of 68x20x40mm (HxWxD) has been designed.

■ Two setting distances are possible: EQ-34W

With EQ-34W, two sensing distances, Far (Main) and Near (Sub), can be set. Hence, one sensor can suffice where previously two were required.

■ Plug-in connector type (excluding EQ-34W)


The plug-in connector type (M12) of the EQ-30 series can be easily disconnected for replacement.

Technical specifications


Type		Diffuse	Diffuse/double output
Model no.	NPN output	EQ-34 (J) (note)	EQ-34W
	PNP output	EQ-34PN (J)	–
Rated sensing distance		2.0m	
Sensing range		0.1-2m	Near: 0.1-2m Far: 0.2-2m
Detectable target		Transparent and opaque material	
Hysteresis		Max. 10% of measurement	
Response time		Max. 2ms	
Supply voltage		10 to 30VDC ± 10%	
Output		PNP / NPN open-collector transistor, max. 100mA	
Emitting element		Infrared LED	
Rated current consumption without load		NPN type: 50mA PNP type: 55mA	2 x NPN type: 90mA
Material		Plastic	
Protection		IP67 (IEC)	
Ambient temperature		–20 to +55°C	
Connection method		Cable 2m or M12 connector	
Dimensions (HxWxD)		68x20x40mm	
Accessories		Screwdriver, 1 pc.	

Note: Suffix J = M12 connector type


Typical applications



Long distance sensing



Object detection



Color-independent detection

Photoelectric
Sensors

Fiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow Sensors

Inductive
Proximity
Sensors

Measurement
Sensors

Ionizers/
Electrostatic
Sensors

Accessories

Index

EQ-30



MQ-W

Very accurate detection by triple beam triangulation sensing method in a compact package

Features

■ Accurate detection

Regardless of color, material, or shape of objects the area reflective type sensor **MQ-W** can detect white or black objects at the same distance.

■ No-miss operation regardless of backgrounds

Area reflective type sensors do not detect objects beyond the set range.

■ Resistant to lens surface soiling


Area reflective type sensors detect the distance by the angle, not the intensity of received light. Even if the lens surface is soiled by dust or powdery material, there is little variation in sensing range.

Technical specifications


Type		Diffuse		
Model no.	NPN output	MQ-W3A(R)(note)	MQ-W20A(R)	MQ-W70A1224EMJ
	PNP output	MQ-W3C(R)	MQ-W20C(R)	MQ-W70C1224EMJ
Sensing range		40mm	200mm	700mm
Adjustable range		20-40mm	40-200mm	200-700mm
Detectable target		Transparent and opaque material		
Hysteresis		Max. 10% of measurement range		Max. 20% of measurement range
Detection frequency		250Hz		
Response time		Max. 2ms		
Supply voltage		9 to 30VDC		
Output		PNP / NPN open-collector transistor, max. 100mA		
Emitting element		Infrared LED; Type R: Red LED		Infrared LED
Rated current consumption without load		Max. 30mA		
Material		Zinc die cast		
Protection		IP67 (IEC)		
Ambient temperature		-25 to +55°C		
Connection method		Cable, 2m		
Dimensions (H×W×D)		32x12.6x32mm		52x18.6x52mm
Accessories		Mounting brackets, 1 set		

Note: Suffix R = Red LED


Typical applications



Distance detection



Position detection



Color-independent detection

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

MQ-W



NA1-11

Cross-beam scanning system to detect slim objects

Features

■ **Letters, postcards can be detected**

Thin objects can be detected by using the cross-beam scanning system.

■ **Beam pitch: 10mm**

Object to be sensed size of $\varnothing 13.5\text{mm}$ is realized by using a beam pitch of 10mm.



■ **Long sensing range**

Though very slim, a wide sensing area of 1m length and 100mm width is realized. It is most suitable for object detection on a wide assembly line or for detecting the dropping of or incursion by small objects whose travel path is uncertain.

■ **Clearly visible large indicator**

A clearly visible large indicator having a 55mm width is incorporated on both the emitter and the receiver.


Cross-beam scanning system




Typical applications

Detecting postcards

NA1-11 can detect thin postcards due to its crossbeam scanning system.

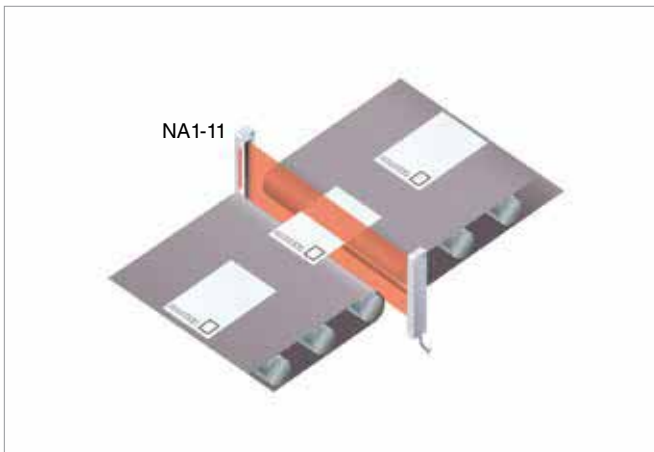

Detection of haphazardly falling objects

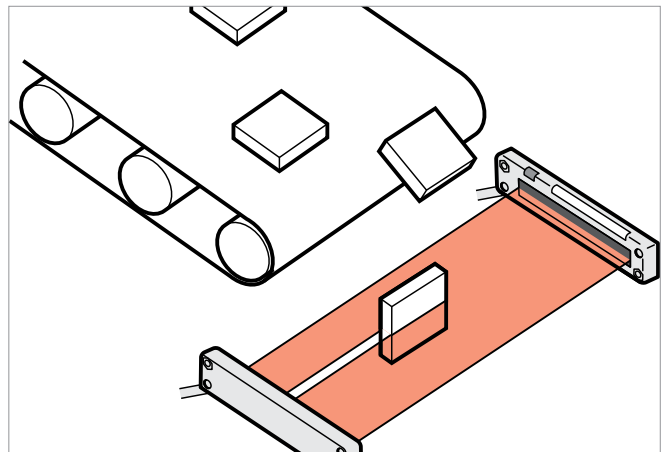

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index

Technical specifications

Type	NPN	PNP
Model no.	NA1-11	NA1-11-PN
Sensing height	100mm	
Sensing range	0.17 to 1m	
Beam pitch	10mm	
Numbers of beam channels	11 each on the emitter and the receiver, respectively	
Object to be sensed	Min. \varnothing 13.5mm (opaque)	
Supply voltage	12 to 24VDC \pm 10%	
Output	NPN open-collector transistor, max. 100mA	PNP open-collector transistor, max. 100mA
Ambient temperature	-10 to +55°C	
Connection method	Cable, 2m	
Dimensions (HxWxD)	140x30x10mm	



NA1-PK5/ NA1-PK3

Pick-to-light sensor –
Ultra-slim body

Features

■ 10 mm thick: half the thickness of conventional models

Space saving now possible; ultra-thin design does not obstruct picking operations.




Cable can be freely arranged in any position

■ Two unit installations are possible

Sensor units can now be set to different light emission frequencies in order to prevent mutual interference.

Two units can now be operated in a side-by-side configuration without interference for problem-free detection over wide areas.




■ Lighting pattern selectable

The job indicator operation can be selected as either continuous lighting or blinking.

Continuous lighting

Blinking

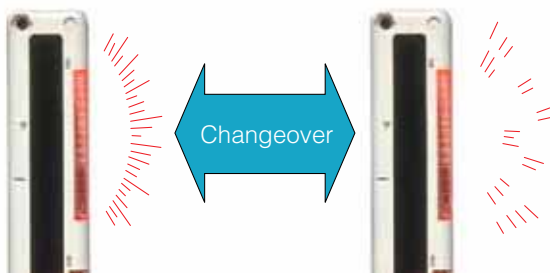


■ Selectable detection operation

Sensor units can be set to detect the interruption of 1 beam channel or 2 or more beam channels.

Single beam interruption

Double beam interruption

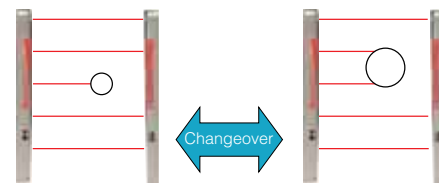

All opaque bodies with $\varnothing 35\text{mm}$ or greater will be detected.

The accidental passage of small objects through the beam axis will not trigger detection, yet the operator's hands will always be accurately detected. This function is also useful when small objects regularly interrupt the beam axis.

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

NA1-PK5/
NA1-PK3

Typical applications

Cell production line



Assembly line



Technical specifications

Type	NPN		PNP	
	Model no.	NA1-PK5	NA1-PK3	NA1-PK5-PNP
Sensing height	100mm	49.2mm	100mm	49.2mm
Sensing range	0.1 to 1.2m	0.03 to 0.3m	0.1 to 1.2m	0.03 to 0.3m
Beam pitch	25mm	24.6mm	25mm	24.6mm
Number of beam channels	5 beam channels	3 beam channels	5 beam channels	3 beam channels
Object to be sensed	Min. ø 35mm (opaque)	Min. ø 29mm (opaque)	Min. ø 35mm (opaque)	Min. ø 29mm (opaque)
Supply voltage	12 to 24VDC ± 10%			
Output	NPN open-collector transistor max.100mA		PNP open-collector transistor max.100mA	
Connection method	Cable, 2m			
Dimensions (HxWxD)	140x30x10mm	70x24x8mm	140x30x10mm	70x24x8mm

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

NA1-PK5/
NA1-PK3



Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

FX-100



FX-100

Excellent price/performance ratio

Features

■ Easy to read

The digital dual display allows you to check both the threshold value and incident light intensity at the same time. It also makes the procedures for setting the various values much easier.

■ Multipurpose M8 connector type

The connectors used are commercially available M8 connectors, so that processing costs and lead time required for carrying out processing can be greatly reduced.


■ Designed in a 3-layer structure to accommodate basic through advanced settings

Setting details are divided into three levels for clearer operation, so that settings for normal operation are made in 'RUN mode', basic settings are made in 'SET mode', and advanced functions are set in 'PRO mode'. This makes setting operations much easier to understand and carry out.

Typical applications


Wafer detection

Detects wafer carrier cases through vacuum chamber's view port.

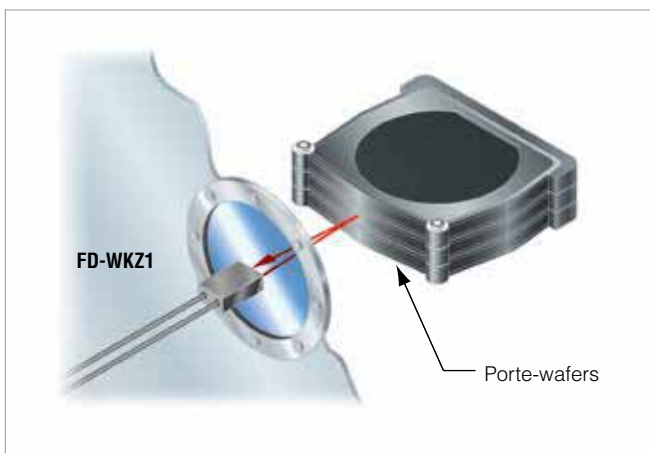


Wafer detection

Sensing possible in corrosive environment. Lenses at the ends of the fiber heads expand the sensing range.

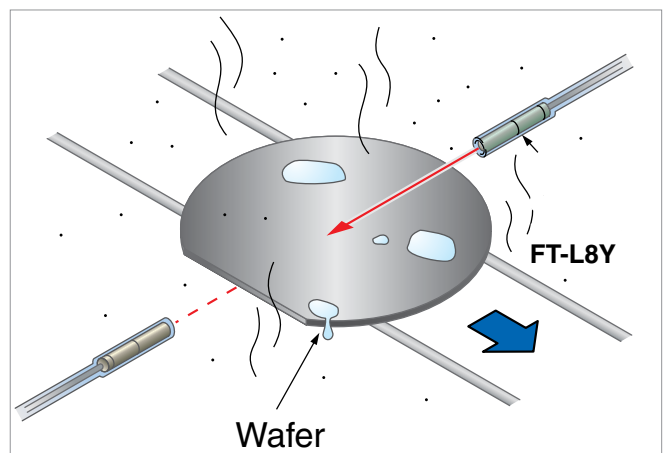


Detection of breaks / cracks of glass




Detection over long ranges



Detection of glass substrate in vacuum chamber



Detection of glass substrate



Technical specifications

Type		Standard type		Long sensing range	
		Connector type	Cable type	Connector type	Cable type
Model no.	NPN output	FX-101 (-Z) (note 2)	FX-101-CC2	FX-102 (-Z) (note 2)	FX-102-CC2
	PNP output	FX-101P (-Z) (note 2)	FX-101P-CC2	FX-102P (-Z) (note 2)	FX-102P-CC2
Supply voltage		12 to 24VDC \pm 10%			
Power consumption		Normal operation: max. 720mW (current consumption max. 30mA at 24V supply voltage) Eco mode: max. 600mW (current consumption max. 25mA at 24V supply voltage)			
Response time		Response time 0: Response time 1: Response time 2: Response time 3:	max. 250 μ s max. 450 μ s max. 500 μ s max. 600 μ s	Response time 1: Response time 2: Response time 3: Response time 4:	max. 2.5ms max. 2.8ms max. 3.2ms max. 5.0ms
Output		PNP / NPN open-collector transistor, max. 100mA			
Output operation		Selectable either Light-ON or Dark-ON			
Short-circuit protection		Incorporated			
Sensitivity setting		2-level teaching/Limit teaching/Full-auto teaching			
Digital display		4 digit green + 4 digit red LCD display			
Timer function		ON-delay /OFF-delay, switchable either effective or ineffective. [Timer period:1ms, 5ms, 10ms, 20ms, 40ms, 50ms, 100ms, 500ms, 1000ms]			
Interference prevention		Incorporated Selectable response time method (note 1) (Functions at response time 1, 2 or 3)		Incorporated Selectable response time method (note 1) (Functions at response time 1, 2, 3 or 4)	
Ambient temperature		-10 to +55°C (if 4 to 7 units are mounted close together: -10 to +50°C; if 8 to 16 units are mounted close together: -10 to +45°C (no dew condensation or icing allowed))			
Emitting element		Red LED			
Material		Enclosure: polycarbonate; key switch: polycarbonate; fiber lock lever: PBT			
Connection method		Small connector M8 connector (note 3)	Cable, 2m	Small connector M8 connector (note 3)	Cable, 2m
Dimensions (HxWxD)		32x9x66.4mm			
Accessories		—	CN-14A-C2 (Connector attached cable: 2m): 1 pc.	—	CN-14A-C2 (Connector attached cable: 2m): 1 pc.

Notes:

- When using the interference prevention function, set the emission frequencies for the amplifiers to be covered by the interference prevention function to different frequency values. However, the interference prevention function does not operate at emission frequency 0 (factory default setting) for the **FX-101(P)(-Z)/FX-101(P)(-Z)-CC2**
- Suffix -Z = M8 connector type
- The cable is not included in delivery. Please select under accessories (page 127)

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors
Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

FX-100

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

FX-301



FX-301

Enhanced functions
- strong performance
- easy to use

Features

■ FX-301(P) (red LED type) version upgrade

We improved the standard model by enhancing its sensing stability and equipping it with handy functions such as the light-emitting amount selection function.

■ Super high-speed response of 35 μ s


The **FX-301(P)-HS** model is the digital type fiber sensor realizing a super high-speed response of 35 μ s rendering it capable of sensing minute objects moving at high speeds.

■ Stable sensing over long and short periods


In addition to a four-chemical emitting element which suppresses changes in the light-emitting element over time so that a stable level of light emission can be maintained over long periods, a new APC (Auto Power Control) circuit has also been adopted. Because fluctuations over short periods of time have also been suppressed, stable sensing is possible very quickly once the power is turned back on after setup changes.

■ Sensing range has been greatly increased

All models use a double coupling lens that enables a much wider sensing range and maximization in the light emission efficiency. Sensing ranges with small diameter fibers and ultra small diameter fibers, which have become very popular due to the miniaturization of chip components, have been increased by 50% over previous values achieved with other amplifiers.




Stable sensing comparison

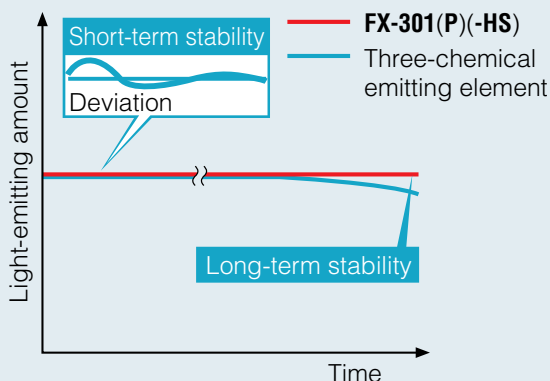

Typical applications

Workpiece detection

This standard type of FX-301(P)(-HS) using red light has a four-chemical emitting element for stable sensing over long periods.




Sensing translucent stickers

The blue LED type greatly reduces the damping rate, making it ideal for delicate sensing for yellow/red transitions.




Register mark detection

The green LED type greatly reduces the damping rate, making it ideal for delicate sensing.




Sensing film meandering

Infrared LED type is ideal for sensing environments with light restrictions, such as places where light-sensitive film is being handled.




Object sensing during the painting process

Due to a sensing range of 19.5m (FX-301 long range mode) and a 10m fiber length, it can be lead through rough environments freely.




Engine block passage confirmation

FD-WKZ1 has realized a sensing range of 480mm (FX-301 long range mode). In addition, due to its powerful beam, it can even work in adverse environments such as in areas prone to dust.



Wire breakage detection

Wide beams are ideal for moving wire detection.



Technical specifications

Type		Standard type	High speed
Model no.	NPN output	FX-301(/-B/-G/-H) (note 1)	FX-301-HS
	PNP output	FX-301(/-B/-G/-H)P	FX-301P-HS
Supply voltage		12 to 24VDC ±10%	
Response time		Max. 65µs H-SP (Red LED type only); max. 150µs (FAST); max. 250µs [STD/S-D (Red LED type only)]; max. 2ms (LONG) selectable with jog switch	Max. 35µs (H-SP); max. 150µs (FAST); max. 250µs (STD/S-D); max. 2ms (LONG) selectable with jog switch
Output		PNP / NPN open-collector transistor, max. 100mA	
Output operation		Selectable either Light-ON or Dark-ON, with jog switch	
Sensitivity setting		2-level teaching/Limit teaching/ Full-auto/ teaching	
Digital display		4-digit red LED display	
Automatic interference prevention function		Incorporated (Up to 4 sets of fiber heads can be mounted close together.) (However, H-SP mode is 2 sets.)	
Ambient temperature		-10 to +55°C	
Emitting element		FX-301(P): Red LED, FX-301B(P): Blue LED, FX-301G(P): Green LED, FX-301H(P): Infrared LED	Red LED
Connection method		Connector (note 2)	
Dimensions (HxWxD)		30.5x10x64.5mm	
Accessories		FX-MB1 Amplifier protection seal	

Notes:

- Without suffix = Red LED
Suffix-B = Blue LED
Suffix-G = Green LED
Suffix-H = Infrared LED

- The cable for amplifier connection is not supplied as an accessory. Please select under accessories (page 127)

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

FX-311



FX-311

Remarkably easy to use

Features

■ 12-turn potentiometer with visible indicator

12-turn potentiometer has been incorporated for fine adjustments. It enables very fine differences to be detected. Since the potentiometer is illuminated, you can even make adjustments easily in dark areas.


■ Three light source types (red, green, blue) are made available for expanding applications

Rapid blinking 'assist function' eases adjustment for optimum sensitivity.

Typical applications

Detecting transparent PET bottles

The green LED type is ideal for stably sensing objects such as transparent bottles which yield only small amounts of light fluctuation.



Register mark detection

The blue LED type can accurately sense yellow marks on white backgrounds that are difficult to sense using the red LED type.



Technical specifications

Model no.	NPN output	FX-311
	PNP output	FX-311P
Supply voltage	12 to 24VDC ±10%	
Power consumption	Max. 840mW (Current consumption max. 35mA at 24V supply voltage)	
Response time	Max. 250µs (STD / S-D), max. 2ms (LONG) selectable with selection switch	
Output	PNP / NPN open-collector transistor, max. 100mA	
Output operation	Selectable either Light-ON or Dark-ON, with selection switch	
Short-circuit protection	Incorporated	
Operation of indicators	Orange LED (lights up when the output is ON)	
Timer function	Incorporated with OFF-delay timer, selectable either effective (approx. 10ms or 40ms) or ineffective	
Automatic interference prevention function	Incorporated (Up to 4 sets of fiber heads can be mounted closely.) (note 1)	
Ambient temperature	-10 to +55°C (if 4 to 7 units are mounted close together: -10 to +50°C; if 8 to 16 units are mounted close together: -10 to +45°C (no dew condensation or icing allowed))	
Emitting element	Red LED	
Material	Enclosure: Heat-resistant ABS, Case cover: polycarbonate	
Connection method	Connector (note 2)	
Dimensions (HxWxD)	34.5x10x70.5mm	

Notes:

- 1.) When the power supply is switched on, the light emission timing is automatically set for interference prevention
- 2.) The cable for amplifier connection is not supplied as an accessory. Please select under accessories (page 127)

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index




FX-500 / 550

Fiber amplifier at the industry's leading edge

Features


Optimized stability

When used with the super quality fiber as a set, the incident light intensity variation among units is decreased to only 1/4 of that of conventional models.

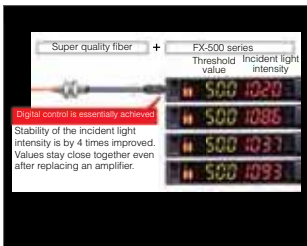

High performance

The FX-500 with its ultra high response time improves of 25µs productivity.




HYPER mode incorporated

FX-500 in combination with the small diameter fiber can handle challenging detections over a super long sensing range.




Improved accuracy!

FX-500 with its accurate detection catches fractional difference in light intensity, fulfilling high precision and low-hysteresis applications.




No PLC necessary, saving material and programming costs




Logical operation of sensors

Three logical calculations (AND/OR/XOR) are selectable using Output 1 of multiple FX-500 series amplifiers. You can logically connect two outputs of an FX-500 or one input of a normal sensor to the output of an FX-500 sensor.

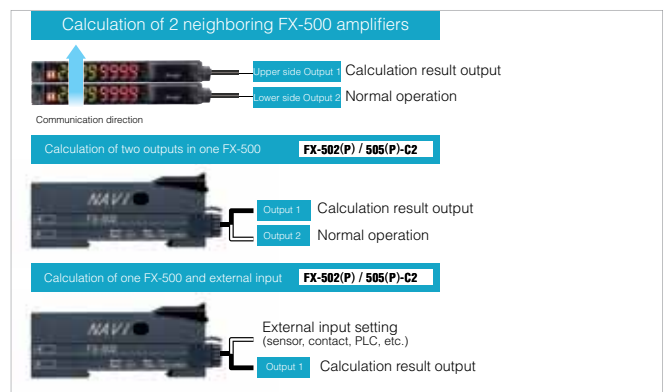


Analog output cable type FX-505

The sensor outputs an analog signal of 4-20mA in proportion to digital value displayed for the current light intensity received.



Edge tracking of film or sheet




Drifting path can be tracked as the light intensity changes.

Direct settings


Direct adjustment: Threshold values can be changed directly in RUN mode.

Direct teaching: Teaching can be done in RUN mode. Just press the SET button once for object "present" and "not present".

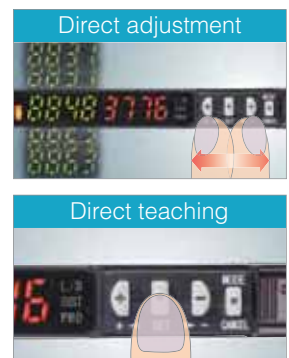


Typical applications

Counting of IC pins

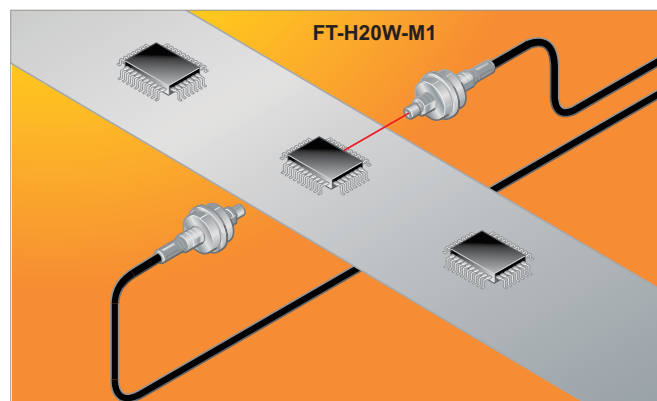

Check crimping

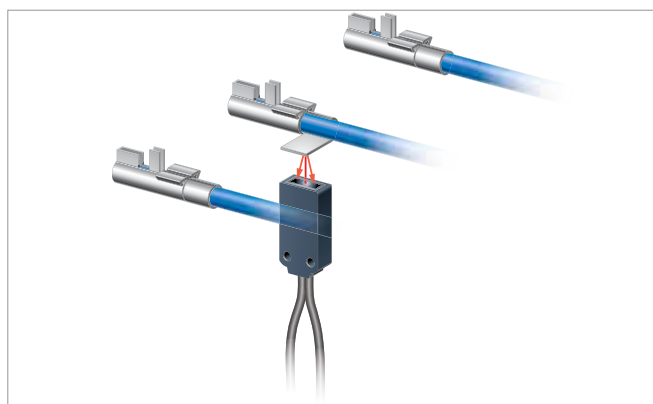

Glass substrate sensing



Technical specifications

Type	Connector			Cable		
Model no.	NPN output	FX-501	FX-502	FX-551	FX-551-C2	FX-505-C2
	PNP output	FX-501P	FX-502P	FX-551P	FX-551P-C2	FX-505P-C2
Digital fiber sensor amplifier	Digital				Analog	
Timer function	Adjustable: 0.1ms to 999.9ms in 0.1ms steps, 1 to 9999ms in 1ms steps, 1 to 32s in 1s steps					
Interference prevention	Auto interference prevention function for up to 12 units and selectable emission frequency method			Incorporated (up to 4 units)		Auto interference prevention function for up to 12 units and selectable emission frequency method
Response time	Max. 25μs/60μs/250μs/2ms/4ms/24ms			Max. 60μs/250μs/2ms/4ms/24ms		Max. 25μs/60μs/250μs/2ms/4ms/24ms
Analog voltage output	-					4 to 20mA
Supply voltage	12 to 24VDC ±10%					
Output	PNP / NPN open-collector transistor, max. 100mA					
Emitting element	Red LED					
Material	Enclosure: polycarbonate, switch: POM					
Rated current consumption (without load)	Normal operation: max. 40mA at 24V supply voltage Eco mode: max. 30mA at 24V supply voltage					
Protection	IP40 (IEC)					
Ambient temperature	-10 to +55°C					
Connection method	Connector type (note)				Cable, 2m	
Dimensions (HxWxD)	34x10x75mm					
Accessories	FX-MB1 Amplifier protection seal			-		FX-MB1 Amplifier protection seal

Note: The cable for amplifier FX-501□, FX-502□, FX-551□ is not supplied as an accessory. Please select under accessories (page 127).

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

FX-500/550

Fiber-optic Sensors

Now with communication interface!



Fibers with integrated high-precision plug

Stable light intensity

Optical **fibers** with insertion plug-in achieve a very high quality standard.

Through the integrated high-precision plug, the fiber core can be centered to within $\pm 40\mu\text{m}$. Variation in light intensity could thus be reduced to $\pm 10\%$.



New fiber core

Now the core consists of only one fiber instead of several single fibers. This design improves sensing stability dramatically because there is no variation in light intensity among individual fibers.




New



Old

Sharp bending and flexible fibers

With a bending radius of 4mm, the optical fibers easily cope with millions of bending cycles.

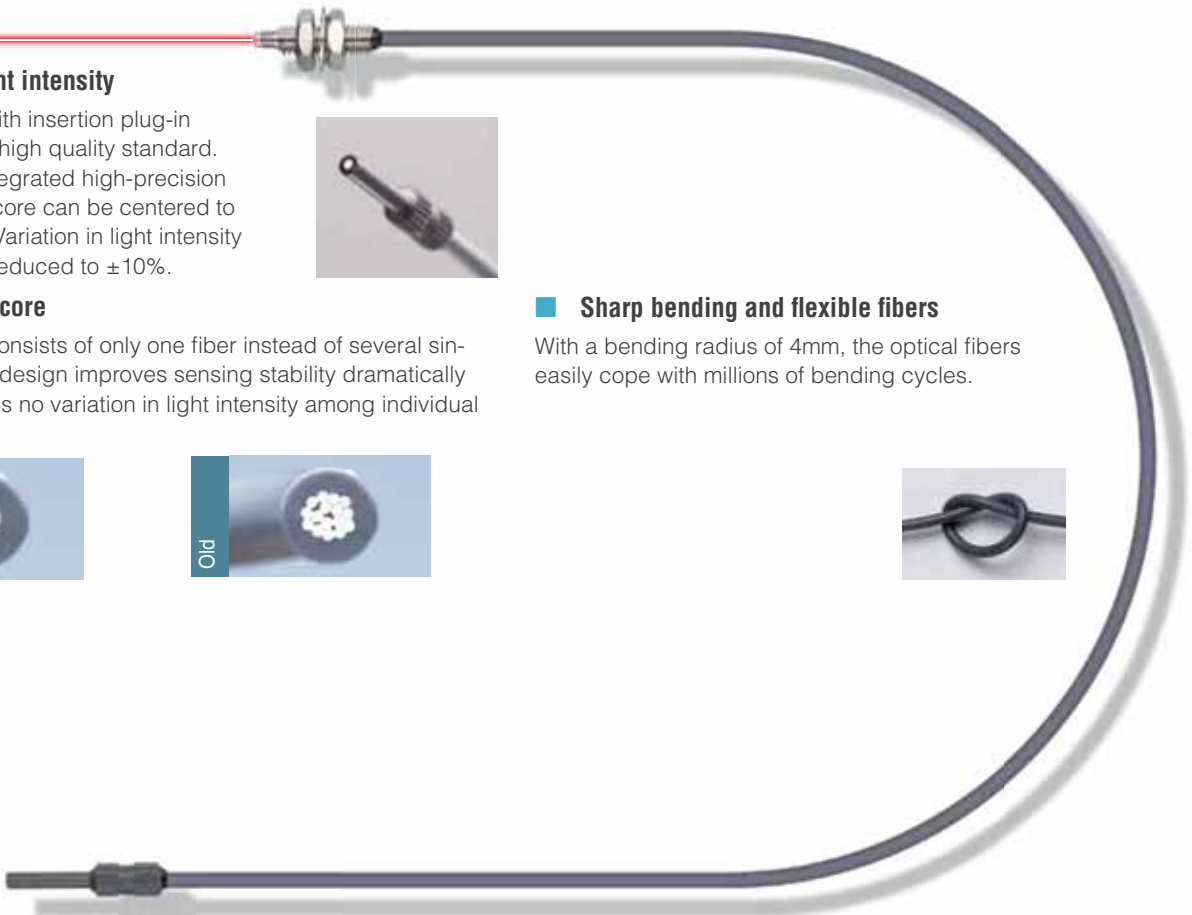

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

Fibers with integrated high-precision plug

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm)			Beam axis dia. (mm)	Protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102			
Threaded	M3 	Tough FT-30	R2	2m	STD 400 HYPR 1350	810 650 210 75	135 400	∅0.5	IP67 (IEC)	-55 to +80°C
	M4 	Tough FT-40	R4		STD 1200 HYPR (note) 3600	2200 1700 530 190	320 870	∅1		
Cylindrical	∅1.5 	Tough FT-S20	R2		STD 400 HYPR 1350	810 650 210 75	135 400	∅0.5		
	∅3 	Tough FT-S30	R4		STD 1200 HYPR (note) 3600	2200 1700 30 190	320 870	∅1		

Note: The length of the fiber cable affects the sensing range.

Reflective type



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note)			Protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102		
Threaded	M3 	Tough FD-30	R2	2m	STD 160 HYPR 600	330 250 80 25	45 155	IP67 (IEC)	-55 to +80°C
	M4 	Tough FD-40			STD 520 HYPR 1550	900 740 260 90	140 420		
	M6 	Tough FD-60	R4		STD 160 HYPR 600	330 250 80 25	45 155		
Cylindrical	∅3 	Tough FD-S30							

Note: The sensing range is specified for white, matt paper.

Tough High flexibility: min. bending radius of 4mm, 10 mio. bending cycles (@ radius 10mm)






- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index

Fibers with integrated high-precision plug

Threaded fibers

Thru-beam type (one pair set)











Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1)			Beam axis dia. (mm)	Protection	Ambient temperature	
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102				
Threaded	M3	 Tough FT-31	R2	2m	STD 315 HYPR 1350	770 550 210 70	130 340	ø0.5	IP67 (IEC)	-55 to +80°C	
	M4	Lens mountable: FX-LE1, FX-LE2, FX-SV1  Tough FT-43	R4		STD 1400 HYPR (note 2) 3600	2800 2100 770 240	350 970				ø1
	Elbow	Lens mountable: FX-LE1, FX-LE2,  Tough FT-R40	R4		STD 930 HYPR (note 2) 3600	1750 1500 500 160	270 740				
	M4	Lens mountable: FX-LE1, FX-LE2, FX-SV1  Tough FT-R43	R4		STD 720 HYPR 3000	1600 1100 430 130	210 640				
	M14	With expansion lens  Tough FT-140	R4		STD (note 2) 19600 HYPR (note 2) 19600	19600 (note 2) 19600 (note 2) 16000 6300	14000 19600 (note 2)				

Notes:
 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
 2.) The length of the fiber cable affects the sensing range

Tough High flexibility: min. bending radius of 4mm, 10 mio. bending cycles (@ radius 10mm)

Reflective type




Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1, 2)			Protection	Ambient temperature	
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102			
Threaded	M3	 Tough FD-31	R2	2m	STD 125 HYPR 515	290 220 80 25	35 140	IP67 (IEC)	-55 to +80°C	
	M3	Coaxial • Lens mountable: FX-MR3, FX-MR6  Tough FD-32G	R2		STD 200 HYPR 650	380 270 95 27	70 190			IP40 (IEC)
	Ultra-small diameter	Lens mountable: FX-MR3, FX-MR6, Coaxial  Tough FD-EG30	R4		STD 48 HYPR 170	130 110 30 9	20 70			
M4	M4  Tough FD-41	R2	2m	STD 125 HYPR 515	290 220 80 25	35 140	IP67 (IEC)	-55 to +80°C		
M4	Lens mountable: FX-MR1, FX-MR2, FX-MR3, FX-MR5, FX-MR6, Coaxial  Tough FD-42G	R2		STD 200 HYPR 650	380 270 95 27	70 190			IP40 (IEC)	
M6	M6  Tough FD-61	R4		STD 450 HYPR 1400	840 670 200 70	120 410				
M6	Coaxial  Tough FD-61G	R4	STD 420 HYPR 1100	800 650 200 60	120 350	IP40 (IEC)				
Elbow	Elbow  Tough FD-R60	R4	STD 290 HYPR 1100	600 550 190 65	110 240		IP67 (IEC)			

Notes:
 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
 2.) The sensing range is specified for white, matt paper
 3.) The allowable cutting range is 700mm from the end inserted at the amplifier

Tough High flexibility: min. bending radius of 4mm, 10 mio. bending cycles (@ radius 10mm)

Square head fibers


Thru-beam type (one pair set)

Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1)			Beam axis ϕ (mm)	Protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102			
Square head	 M3 W5.5 x H8 x D16	Tough FT-R31	R2	2m	STD 270 HYPR 1000	580 440 160 55	100 340	ϕ 0.5	IP67 (IEC)	-55 to +80°C
		FT-R41W	R1		STD 800 HYPR 3200	1800 1400 460 150	250 710	ϕ 1	IP40 (IEC)	-40 to +60°C
	With lens FT-R42W	STD 2200 HYPR 3600 (note 2)			3600 (note 2) 3500 1300 460	510 2000	ϕ 2.2			
	Lens mountable: FX-LE1/FX-LE2/FX-SV1 FT-R43	Tough	R4		STD 720 HYPR 3000	1600 1100 430 130	210 640	ϕ 1	IP67 (IEC)	-55 to +80°C
	Cable protection Usable with lens FT-R44Y	Tough NEW			STD 720 HYPR 3000	1600 1100 430 130	210 640	ϕ 1	IP67 (IEC) (note 3)	-55 to +80°C
	Full protection FT-R60Y	Tough NEW			STD 2100 HYPR 3600 (note 2)	3600 (note 2) 3600 (note 2) 1260 400	690 1890	ϕ 3.5	IP68G	-55 to +80°C

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced by 20% depending upon how the fiber is cut
- 2.) The length of the fiber cable affects the sensing range
- 3.) The fiber cable is oil-resistant

Reflective type

Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1, 2)			Beam axis ϕ (mm)	Degree of protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102			
Square head	 M3 W5.5xH8xD16	Tough FD-R31G	R2	500mm	STD 170 HYPR 530	310 260 85 27	45 150	Emitter ϕ 0.5	IP40	-55 to +80°C
		FD-R32EG	STD 45 HYPR 170		110 92 30 9	20 68	Emitter ϕ 0.25			
	FD-R34EG	R4	STD 138 HYPR 130		90 70 23 7	17 60	Emitter ϕ 0.175			
	FD-R33EG	STD 119 HYPR 84	44 33 11 3		7 22	Emitter ϕ 0.125	-20 to +60°C			
	M4 W7xH9xD13.5	Tough FD-R41	R2		STD 210 HYPR 710	430 320 100 34	60 170	ϕ 0.75	IP67	-55 to +80°C
		Cable protection FD-R61Y	Tough NEW		R4	TD 280 HYPR 990	610 435 160 50	85 185	-	

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced by 20% depending upon how the fiber is cut
- 2.) The length of the fiber cable affects the sensing range
- 3.) The fiber cable is oil-resistant

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors

Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

Square head fibers

Cylindrical fibers

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1)			Beam axis dia. (mm)	Protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102			
Cylinder		Tough FT-S11	R2	500mm	STD 210 HYPR 160 350	210 60 19	40 90	ø0.25	IP67 (IEC)	-55 to +80°C
		FT-S21			STD 770 HYPR 550 1350					
		FT-S21W	R1	2m	STD 590 HYPR 440 990	590 440 53	80 240	ø0.5	IP67 (IEC)	-40 to +60°C
		FT-S32	R10		STD 3100 HYPR 1800 3600					
		FT-S31W	R1	2m	STD 1900 HYPR 1400 3300	1900 1400 160	260 720	ø1	IP40 (IEC)	-40 to +60°C
		FT-E23	R2	1m		STD 160 HYPR 125 270	160 125 13	22 80	ø0.25	IP67 (IEC)
						FT-V40				

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
- 2.) The length of the fiber cable affects the sensing range

Reflective type



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1, 2)			Protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102		
Cylindrical		Tough FD-S21	R2	1m	STD 130 HYPR 110 190	130 110 11	25 70	IP40 (IEC)	-55 to +80°C
		FD-S32			R4				
		FD-S32W	R1	2m	STD 630 HYPR 430 900	630 430 45	80 230	IP67 (IEC)	-40 to +60°C
		FD-S31	R2		STD 290 HYPR 220 515				
		FD-S33GW	R1	2m	STD 340 HYPR 280 670	340 280 25	45 140	IP40 (IEC)	-40 to +60°C
			FD-S60Y		R4				
			FD-E13	R4	1m	STD 29 HYPR 25 50	29 25 2	5 15	IP40 (IEC)
			FD-E23			STD 120 HYPR 80 170			

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
- 2.) The sensing range is specified for white, matt paper

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors


Accessories

Index

Cylindrical fibers

Fibers with sleeve

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1, 2)			Beam axis dia. (mm)	Protection	Ambient temperature	
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102				
Threaded	M3 	Tough FT-31S	R2	2m	STD 315 HYPR 1220	740 550 195 63	130 340	ø0.5	IP67 (IEC)	-55 to +80°C	
	M4 	Tough FT-42S	R4 (note 3)		STD 1130 HYPR 3600	2050 1600 530 190	300 800				
	Narrow beam ø0.25mm 	Tough FT-E23	R2	1m	STD 75 HYPR 270	160 125 42 13	22 80	ø0.25		-40 to +70°C	
	Side sensing ø2		Tough FT-V23	R4	2m	STD 450 HYPR 1800	1000 880 280 90	160 400	ø0.75	IP30 (IEC)	-55 to +80°C
			Tough FT-V25	R2	STD 240 HYPR 900	550 480 140 45	95 260	ø0.5			
			Tough FT-V30	R4	STD 680 HYPR 2200	1200 1000 340 100	180 480	ø1.0			

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
- 2.) The length of the fiber cable affects the sensing range
- 3.) The bending radius of the sleeve is min. 10mm

Tough High flexibility: min. bending radius of 4mm, 10 mio. bending cycles (@ radius 10mm)

Reflective type



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1, 2)			Protection	Ambient temperature	
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102			
Threaded	Ultra-small diameter M3 	FD-EG30S	R4	1m	STD 50 HYPR 170	110 80 30 9	20 70	IP40 (IEC)	-40 to +70°C	
	M4 	Tough FD-41S	R2 (note 3)	2m	STD 125 HYPR 515	290 220 80 25	35 140	IP67 (IEC)	-55 to +80°C	
	M6 	Tough FD-61S	R4 (note 3)		STD 420 HYPR 1200	790 660 220 75	130 360			
Cylindrical	Ultra-small diameter ø1.5 	FD-E13	R4	1m	STD 12 HYPR 50	29 25 7 2	5 15	IP40 (IEC)	-40 to +60°C	
	Side sensing ø3		Tough FD-V30	R2	2m	STD 65 2559 HYPR 240	130 120 35 14	25 75	IP30 (IEC)	-55 to +80°C
			Tough FD-V50	R4		STD 120 HYPR 370	220 210 75 25	40 100		

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
- 2.) The sensing range is specified for white, matt paper
- 3.) The bending radius of the sleeve is min. 10mm

Tough High flexibility: min. bending radius of 4mm, 10 mio. bending cycles (@ radius 10mm)

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index
- Fibers with sleeve

Flat fibers

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1)			Beam axis dia. (mm)	Protection	Ambient temperature			
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102						
Flat	Top sensing W3 × H8 × D12	Tough FT-Z30H	R2	2m	STD 3500 HYPR (note 2) 3600	3600 (note 2) 2600 810	1400 3200	2×3	IP40 (IEC)	-40 to +60°C			
	Top sensing W3 × H8 × D12	FT-Z30HW	R1		STD 3500 HYPR (note 2) 3600	3600 (note 2) 2600 810	1400 3200						
	Side sensing W3 × H12 × D8	Tough FT-Z30E	R2		STD 3500 HYPR (note 2) 3600	3600 (note 2) 2400 740	1200 3200						
	Side sensing W3 × H12 × D8	FT-Z30EW	R1		STD 3400 HYPR (note 2) 9600	3600 (note 2) 2000 630	1400 2600						
	Front sensing W8.5 × H12 × D3	Tough FT-Z30	R2		STD 2100 HYPR (note 2) 3600	3600 (note 2) 1200 410	710 2300						
	Front sensing W8.5 × H12 × D3	FT-Z30W			STD 1500 HYPR (note 2) 3600	3300 1000 280	540 1800						
	With boss	Front sensing W10 × H7 × D2	FT-Z20W	R1	1m	STD 530 HYPR (note 2) 1600	1100 900 330 100	230 670	ø1.5		-		
		Top sensing W2 × H10 × D10	FT-Z20HBW			STD 260 HYPR 1100	670 570 180 55	100 320				ø0.5	IP67 (IEC)
		Front sensing W14 × H7 × D3.5	FT-Z40W			STD 1400 HYPR (note 2) 3500	3300 2300 890 290	330 1000				ø1.5	-
		Top sensing W3.5 × H14 × D11	FT-Z40HBW			STD 800 HYPR (note 2) 3300	1900 1400 490 160	260 720				ø1	IP67 (IEC)

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
- 2.) The length of the fiber cable affects the sensing range

Reflective type



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1, 2)			Protection	Ambient temperature	
					FX-500 series	U-LG LONG FAST H-SP	FX-101 Fx-102			
Flat	Front sensing W10 × H7 × D2	FD-Z20W	R1	1m	STD 2 to 65 HYPR 1 to 230	1 to 110 1 to 85 3 to 35 5 to 13	2 to 20 1 to 70	-	-40 to +60°C	
	Top sensing W2 × H10 × D10	FD-Z20HBW			STD 2 to 85 HYPR 1 to 340	1 to 210 1 to 180 2 to 55 3 to 15	2 to 30 1 to 90			IP67 (IEC)
	Front sensing W14 × H7 × D3.5	FD-Z40W		2m	STD 110 HYPR 430	230 180 1.5 to 65 3 to 25	1 to 55 160			-
	Top sensing W3.5 × H14 × D11	FD-Z40HBW			STD 260 HYPR 760	540 470 1 to 160 2 to 50	1 to 90 0.5 to 240			IP67 (IEC)


Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
- 2.) The sensing range is specified for white, matt paper

Tough High flexibility: min. bending radius of 4mm, 10 mio. bending cycles (@ radius 10mm)

Wide beam fibers

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1)			Beam axis dia. (mm)	Protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102			
Wide beam	Sensing width 32mm W5 x H69 x D20	Tough FT-A32	R2	2m	STD (note 2) 3600 HYPR (note 2) 3600	3600 (note 2) 3600 (note 2) 3600 (note 2) 2100	3600 (note 2) 3600 (note 2)	3.2 x 32	IP40 (IEC)	-40 to +60°C
	Sensing width 32mm W5 x H69 x D20	FT-A32W	R1		STD (note 2) 3600 HYPR (note 2) 3600	3600 (note 2) 3600 (note 2) 3600 (note 2) 3000	3600 (note 2) 3600 (note 2)			-40 to +55°C
	Sensing width 11mm W4.2 x H31 x D13.5	Tough FT-A11	R2		STD (note 2) 3600 HYPR (note 2) 3600	3600 (note 2) 3600 (note 2) 3600 (note 2) 1100	1900 (note 2) 3600 (note 2)	2.2 x 11		-40 to +70°C
	Sensing width 11mm W4.2 x H31 x D13.5	FT-A11W	R1		STD (note 2) 3600 HYPR (note 2) 3600	3600 (note 2) 3600 (note 2) 3600 (note 2) 1300	1700 3400			-40 to +55°C
Array	Sensing width 5.5mm W5 x H15 x D15	Tough FT-AL05	R2	STD 860 HYPR 2300	1550 1500 50 170	250 660	0.25 x 5.5	-55 to +80°C		

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
- 2.) The length of the fiber cable affects the sensing range

Reflective type



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1, 2)			Protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102		
Wide beam	W7 x H15 x D30	Tough FD-A16	R4	2m	STD 200 HYPR cannot use	200 140 75	120 240	IP40 (IEC)	-40 to +60°C
Array	W5 x H20 x D20	Tough FD-AL11	R2		STD 320 HYPR 670	530 510 180 50	100 285		-55 to +80°C

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
- 2.) The sensing range is specified for white, matt paper

Tough High flexibility: min. bending radius of 4mm, 10 mio. bending cycles (@ radius 10mm)

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

Wide beam fibers

Convergent reflective fibers for glass detection

Reflective type



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1, 2)			Protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102		
Glass substrate detection	Side sensing W25 × H7.3 × D30	FD-L32H	R4	4m	STD 0 to 56 HYPR 0 to 110	0 to 87 0 to 74 1 to 38 Cannot use	16 to 30 0 to 50	IP40 (IEC)	-40 to +60°C
	Long sensing range W20 × H29 × D3.8	Tough FD-L30A	R2	3m	STD 0 to 43 HYPR 0 to 43	0 to 43 0 to 43 0 to 42 0 to 29	0 to 40 0 to 50		0 to +70°C
	Long sensing range W23.5 × H29 × D4.5	Tough FD-L31A	R4		STD 4 to 33 HYPR 4 to 32 3 to 35	4 to 33 4 to 33 4 to 32 5 to 25	5 to 30 4 to 33		0 to +70°C
	Long sensing range W17 × H29 × D3.8	Tough FD-L22A	R2	2m	STD 0 to 24 HYPR 0 to 31	0 to 28 0 to 27 0 to 24 0 to 18	0 to 19 0 to 25		0 to +70°C
	Short sensing range W18 × H29 × D3.8	Tough FD-L23		3m	STD 0 to 29 HYPR 0 to 30	0 to 30 0 to 30 0 to 28 1.5 to 24	0 to 28 0 to 30		-20 to +70°C
	Short sensing range W12 × H19 × D3	Tough FD-L11	R4	2m	STD 0 to 9.5 HYPR 0 to 11.5	0 to 10.5 0 to 10 0 to 9 0 to 8	0 to 8 0 to 9		-40 to +60°C
	Short sensing range W12 × H19 × D3	Tough FD-L10			STD 0 to 5 HYPR 0 to 4 0 to 6	0 to 5.5 0 to 5.5 0 to 4.5 0 to 4	0 to 4.5 0 to 5.5		
	Short sensing range W24 × H21 × D4	Tough FD-L21			STD 1.5 to 16 HYPR 2 to 15 1 to 19	1 to 18 1 to 18 2 to 15 3 to 12	3 to 15 1.5 to 16		
	Short sensing range W24 × H21 × D4	FD-L21W	R1	STD 3 to 14 HYPR 4 to 14 1.5 to 15	2 to 15 2 to 15 4 to 14 6.5 to 10	7 to 12 3 to 14	-40 to +70°C		
	Short sensing range W6 × H18 × D14	Tough FD-L20H	R2	STD 23 HYPR 45	35 32 2 to 15 5 to 9	5 to 15 1 to 30			
Ultra-small	 W7.2 × H7.5 × D2	FD-L12W	R1	1m	STD 8 HYPR 14	12.5 12 0.5 to 7 0.5 to 4	1 to 4.5 0.5 to 7	IP30 (IEC)	-40 to +60°C

Notes:

- 1.) The sensing range specified for transparent glass 100×100×0.7mm (FD-L32H: edge, FD-L21 and FD-L21W: 12mm), (FD-L20H: white non-glossy paper, FD-L10: silicon wafers 100×100×2mm)
- 2.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut

Retroreflective type




Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1, 2)			Protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102		
With polarizing filter	W5.2 × H9.5 × D16 W30 × H30 × D0.5	FR-Z50HW	R1	2m	STD 100 to 990 HYPR 100 to 1900	100 to 1400 100 to 1200 100 to 780 100 to 490	100 to 550 100 to 830	IP40 (IEC)	-25 to +55°C
Side sensing	W7.5 × H2.2 × D11.2 W4 × H2 × D21.5	Tough FR-KZ22E	R2		STD 15 to 310 HYPR 15 to 570	15 to 460 15 to 410 15 to 220 15 to 100	15 to 200 15 to 360		
Narrow view Top sensing	W5.2 × H9.5 × D21 W10.6 × H28 × D10.1	Tough FR-KZ50H			STD 20 to 300 HYPR 20 to 1000	20 to 800 20 to 400 20 to 200 20 to 200	20 to 200 20 to 350		
Narrow view Side sensing	W9.5 × H25 × D5.2 W28 × H10.6 × D10.1	Tough FR-KZ50E							

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
- 2.) The sensing range is specified for the reflector

Heat-resistant fibers

Thru-beam type (one pair set)



Type	Temperature	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1)			Beam axis dia. (mm)	Ambient temperature
						FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102		
Heat-resistant fiber	350°C	Lens mountable: FX-LE1/LE2/SV1 	FT-H35-M2	R25	2m	STD 430 HYPR 1200	880 670 250 80	170 490	ø1.2	-60 to +350°C
	200°C	Lens mountable: FX-LE1/LE2/SV1 	FT-H20W-M1	R10	1m	STD 470 HYPR (note 2) 1600	1,000 840 300 90	100 300	ø0.8	-60 to +200°C
	130°C	Lens mountable: FX-LE2 	FT-H13-FM2	R25	 2m	STD 700 HYPR 3300	1900 1300 410 140	250 700	ø1.5	-60 to +130°C
Heat-resistant (joint)	200°C	Lens mountable: FX-LE1/LE2/SV1 	FT-H20-J20-S (note 5)	Heat resistant R18 (note 4)	 200mm (note 3)	STD 470 HYPR 1600	1000 790 300 90	135 420	ø1.2	-60 to +200°C
			FT-H20-J30-S (note 5)		 300mm (note 3)					
			FT-H20-J50-S (note 5)		 500mm (note 3)					
		Side sensing 	FT-H20-VJ50-S (note 5)		 800mm (note 3)					
			FT-H20-VJ80-S (note 5)							

- Notes:
- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
 - 2.) The length of the fiber cable affects the sensing range
 - 3.) The fiber length of the heat-resistant side cannot be cut
 - 4.) Bending radius R=25mm or more
 - 5.) Heat-resistant side and ordinary temperature fiber are sold together as a set

Reflective type



Type	Temperature	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1, 2)			Ambient temperature	
						FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102		
Heat-resistant fiber	Threaded	Coaxial M6 	FD-H35-M2	R25	2m	STD 260 HYPR 720	540 460 150 45	75 280	-60 to +350°C	
		Coaxial M6 	FD-H20-M1		1m	STD 330 HYPR 840	550 500 200 55	120 300	-60 to +200°C	
		M6 	FD-H13-FM2		 2m	STD 350 HYPR 880	640 600 200 65	100 280	-60 to +130°C	
	Glass substrate detection convergent reflective	300°C			FD-H30-L32	2m	STD 17 HYPR 40	30 25 12 1.5 to 6	2 to 9 0 to 17	-60 to +300°C
		250°C			FD-H25-L45	3m	STD 5 to 42 HYPR 4 to 43.5	4 to 43 4.5 to 43 5 to 40 6.5 to 34	7 to 35 7 to 38	-20 to +250°C (Standard fibers -20 to +70°C)
		180°C			FD-H18-L31	 2m	STD 16 HYPR 60	32 24 13 2 to 6.5	0 to 10 0 to 25	-60 to +180°C

- Notes:
- 1.) The sensing range is specified for white, matt paper (50x50mm, glass substrate: **FD-H30-L32**, **FD-H18-L31**, clear glass 100x100x0.7mm: **FD-H25-L43** and **FD-H25-L45**)
 - 2.) The length of the fiber cable affects the sensing range

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index

Heat-resistant fibers

Chemical-resistant fibers

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 1)			Beam axis dia. (mm)	Protection	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102			
Chemical-resistant	Oil-resistant Square head M4	Cable-protection type Compatible with lens W7xH9.5xD15.5	R4	2m	STD 720 HYPR 3000	1600 1100 430 130	210 640	ø1	IP67 (note 4)	-55 bis +80°C
		Side sensing W10xH11xD21,2			STD 2100 HYPR (note 2) 3600	3600 3600 1.260 400	690 1.890			
	Flat	SEMI W7 x H15 x D13 	R25		STD 3100 HYPR (note 2) 3600	3600 (note 2) 3600 (note 2) 1900 470	520 3100	ø3.7	IP68G	0 to +60°C
		Cylindrical	Heat-resistant 115°C ø5.5 (25)		FT-HL80Y	STD (note 2) 3600 HYPR (note 2) 3600	3600 (note 2) 3600 (note 2) 2300 740			990 2340
 ø5.5 (25)	FT-L80Y		STD (note 2) 3600 HYPR (note 2) 3600	3600 (note 2) 3600 (note 2) 2800 920	1.100 2.600	-40 to +70°C				
Side sensing metal free ø5.5 (25)	FT-V80Y		STD 1300 HYPR (note 2) 3600	2800 2200 800 240	340 800					

Notes:

- 1.) The sensing range of the free-cut type fiber may be reduced depending upon how the fiber is cut
- 2.) The length of the fiber cable affects the sensing range
- 3.) The allowable cutting range is 500mm from the end inserted at the amplifier
- 4.) The fiber is oil-resistant

Vacuum-resistant fibers

Thru-beam type (one pair set)



Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm)			Beam axis dia. (mm)	Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102		
Vacuum-resistant Thru-beam type	300°C Lens mountable: FV-LE1/SV2 M4 30	FT-H30-M1V-S (note)	R18	1m	STD 27 HYPR 1000	590 470 160 55	110 280	ø1.2	-30 to +300°C

Note: Sold as a set comprising vacuum type fiber and photo-terminal (FV-BR1)

Reflective type















Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Sensing range (mm) (note 2)			Ambient temperature
					FX-500 series	U-LG LONG FAST H-SP	FX-101 FX-102	
Vacuum-resistant	300°C W9.5 x H5.2 x D15	FD-H30-KZ1V-S (note 1)	R18	1m	STD 20 to 200 HYPR 5 to 500	10 to 340 15 to 270 20 to 120 20 to 45	25 to 80 10 to 220	-30 to +300°C
	300°C, Glass substrate detection W19 x H5 x D27	FD-H30-L32V-S (note 1)			3m	STD 8 HYPR 18	12 10 5,5 1.5 to 3	

Notes:

- 1.) Sold as a set comprising vacuum type fiber and photo-terminal (FV-BR1)
- 2.) The sensing range is specified for transparent glass 100x100x0.7mm

Fibers for liquid leak/liquid detection


Type	Shape of fiber head (mm)	Model no.	Bending radius	Fiber cable length	Description	Protection	Ambient temperature	
Contact type	Liquid level sensing	Heat resistant 125°C Fluorine resin coating 	FD-F8Y	Protective tube R40 Standard fibers R15	 2m (note)	ø6mm Protective tube: Fluorine resin, Length 1m (not cuttable) Liquid surface not contacted: beam received Liquid surface contacted: no beam received	IP68 (IEC)	-40 to +125°C
		Heat resistant 105°C Fluorine resin coating 	FD-HF40Y	Protective tube R20 Standard fibers	 2m	ø4mm Protective tube: Fluorine resin, Length 500mm (not cuttable) Liquid surface not contacted: beam received Liquid surface contacted: no beam received	IP67 (IEC)	-40 to +105°C
		Heat resistant 70°C Fluorine resin coating 	FD-F41Y	R10				-40 to +70°C
Pipe-mountable type	Liquid leak detection	SEMI S2 W20xH30xD10 	Tough FD-F71	Protective tube R20 Standard fibers R4	 5m	Liquid leak detection Leak absent: beam received Leak present: no beam received		-20 to +60°C
		Liquid level sensing	Default  W25 x H13 x D20	FD-F41	R10	 2m	Applicable pipe diameter: Outer dia.: ø6mm to ø26mm Material: transparent pipe, PFA (fluorine resin, polycarbonate, acrylic, glass) Wall thickness: 1 to 3mm Liquid absent: beam received Liquid present: no beam received	-
	For wall thickness 1mm  W25 x H13 x D20		FD-F4	Applicable pipe diameter: Outer dia.: ø6mm to ø26mm Material: transparent pipe, PFA (fluorine resin). Wall thickness: 1mm. Liquid absent: beam received Liquid present: no beam received				
	Liquid sensing	Liquid sensing	Mountable on pipe W6.5 x H28.3 x D17 	Tough FD-FA93	R4		Applicable pipe diameter: Outer dia.: ø8mm or more (When used with the tying bands: ø8mm to ø80mm) Material: transparent pipe, PFA (fluorine resin). Liquid absent: beam received Liquid present: no beam received	IP40 (IEC)
SEMI S2 W23 x H20 x D17 			Tough FT-F93	Protective tube R20 Standard fibers R2		Applicable pipe diameter: Outer dia.: ø3mm to ø10mm Material: transparent pipe, PFA (fluorine resin). Wall thickness: 0.3 to 1mm Liquid absent: beam received Liquid present: no beam received	-40 to +60°C	

Note: The allowable cutting range is 500mm from the end inserted at the amplifier

Tough High flexibility: min. bending radius of 4mm, 10 mio. bending cycles (@ radius 10mm)

Accessories

- RF-003 (Reflector for FR-KZ21/KZ21E)
- RF-13 (Reflective tape for reflective type)
- FX-CT1 (Fiber cutter)
- FX-CT2 (Fiber cutter)
- FX-CT3 (Fiber cutter)
- FX-AT2 (Attachment for fixed-length fiber, Orange)
- FX-AT3 (Attachment for ø2.2mm fiber, Clear orange)
- FX-AT4 (Attachment for ø1mm fiber, Black)
- FX-AT5 (Attachment for ø1.3mm fiber, Gray)
- FX-AT6 (Attachment for ø1mm / ø1.3mm fiber, Black/Gray)

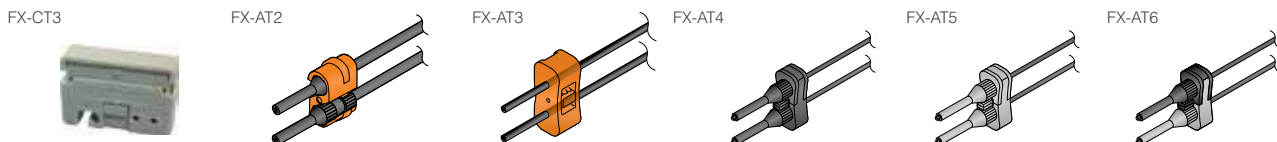






Photoelectric Sensors
Fiber-optic Sensors
Standard Fibers
Fiber Sensors Communication Units
Mark Sensors
Laser Sensors
Safety Sensors
Pressure & Flow Sensors
Inductive Proximity Sensors
Measurement Sensors
Ionizers / Electrostatic Sensors
Accessories
Index

Fibers for liquid leak detection

Lens









■ Thru-beam type fiber

Model no.	Picture	Description	Applicable fibers
FX-LE1		Expansion lens increases the sensing range by 5 times or more, ambient temperature: -60 to +350°C (note 1, 2)	FT-43, FT-42, FT-42W, FT-45X, FT-R40, FT-R43, FT-H35-M2, FT-H20W-M1, FT-H20-M1, FT-H20-J50-S, FT-H20-J30-S, FT-H20-J20-S
FX-LE2		Expansion lens increases the sensing range by 6 times or more, ambient temperature: -60 to +350°C (note 1, 2)	
FX-SV1		Side-view lens, beam axis is bent by 90°, ambient temperature: -60 to +300°C (note 1, 2)	
FV-LE1		Expansion lens for vacuum fiber increases the sensing range by 4 times or more, ambient temperature: -60 to +350°C (note 1, 2)	FT-H30-M1V-S
FV-SV2		Vacuum resistant side-view lens, beam axis is bent by 90°, ambient temperature: -60 to +300°C (note 1, 2)	

Notes:

- 1.) Consider the ambient temperature of the fibers to be used in combination
- 2.) Please test the functionality after mounting the lenses

Reflective type fiber

Model no.	Picture	Description	Applicable fibers
FX-MR1		Pinpoint spot lens, distance to focal point 6 ± 1 mm, spot diameter $\varnothing 0.5$ mm, ambient temperature -40 to $+70^\circ\text{C}$ (note 1, 2)	FD-42G, FD-42GW
FX-MR2	 Distance to focal point Spot diameter	Zoom lens, screw-in depth (7-14mm), distance to focal point (18.5- 43mm), spot diameter $\varnothing 0.7$ -2mm, ambient temperature: -40 to $+60^\circ\text{C}$ (note 1, 2)	
FX-MR3	 Distance to focal point Spot diameter	Extremely fine spot, distance to focal point: 7.5 ± 0.5 mm, spot diameter: FD-EG31 $\varnothing 0.15$ mm/ FD-EG30 $\varnothing 0.3$ mm/ FD-42G, FD-42WG, FD-32G, FD-32GX $\varnothing 0.5$, ambient temperature: -40 to $+70^\circ\text{C}$ (note 1, 2)	FD-EG31, FD-EG30, FD-42G, FD-42GW, FD-32G, FD-32GX
FX-MR5	 Distance to focal point Spot diameter	Zoom lens, screw-in depth, (8-14mm), distance to focal point (13-30mm), Spot diameter $\varnothing 0.5$ -3mm, ambient temperature: -40 to $+70^\circ\text{C}$ (note 1, 2)	FD-42G, FD-42GW
FX-MR6	 Distance to focal point Spot diameter	Extremely fine spot, distance to focal point 7.5 ± 0.5 mm, spot diameter: FD-EG31 $\varnothing 0.1$ mm/ FD-EG30 $\varnothing 0.2$ mm/ FD-42G, FD-42WG, FD-32G, FD-32GX $\varnothing 0.4$ mm, ambient temperature: -40 to $+60^\circ\text{C}$ (note 1, 2)	FD-EG31, FD-EG30, FD-42G, FD-42GW, FD-32G, FD-32GX
FX-MR7		Lens for extremely small spot, fits on M3 fiber, distance to focal point 7.0 ± 0.5 mm, Spot diameter: FD-EG31 $\varnothing 0.1$ mm/ FD-EG30 $\varnothing 0.2$ mm/ FD-42G, FD-42WG, FD-32G, FD-32GX $\varnothing 0.4$ mm. Ambient temperature: -40 to $+60^\circ\text{C}$ (note 1,2)	FD-R33EG, FD-EG31, FD-R34EG, FD-R32EG, FD-EG30, FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW
FX-MR8		Zoom lens, variable spot diameter, sensing range 10-30mm, spot diameter $\varnothing 0.4$ -3.5mm, Ambient temperature: -40 to $+60^\circ\text{C}$ (note 1, 2)	FD-R33EG, FD-EG31, FD-R34EG, FD-R32EG, FD-EG30, FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW
FX-MR9		Lens for parallel light emission; sensing range 0-30mm, Beam spot $\varnothing 0.4$ mm, Ambient temperature: -40 to $+60^\circ\text{C}$ (note 1,2)	FD-R33EG, FD-EG31, FD-R34EG, FD-R32EG, FD-EG30, FD-R31G, FD-32G, FD-32GX, FD-42G, FD-42GW

Notes:

- 1.) Consider the ambient temperature of the fibers to be used in combination
- 2.) Please test the functionality after mounting the lenses

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers/ Electrostatic Sensors
- Accessories
- Index



Communication units

Communications units for flexible solutions

Functions

Function handy for startup and maintenance

Using a PLC or PC, this communication unit not only facilitates inputs (teaching, bank switching) to a digital fiber sensor e.g. FX-301(P), but also received-light amount and output status verifications greatly enhance workability during startup and maintenance.

Intuitive integration at the controller level

Rapid integration at the controller level enables reliable monitoring, remote maintenance or remote control via open networks. Several units can be configured with minimal wiring efforts. Data can be saved centrally, where it can be archived or used for evaluation purposes.



Combining different units

The ability to combine different sensor types, e.g. laser sensors, pressure sensors or digital fiber-optic sensors, opens up many application areas, especially for special purpose machinery manufacture. The sensors themselves communicate with each other via an infrared interface.



PRODUCT FINDER FOR SENSORS

Find the optimal sensor within seconds!

NEW!



Keyword search and combinable filter functions

Quick overview with compare function

Send search results via PDF to customers and colleagues



www.panasonic-electric-works.com/productfinder-sensors




LX-100

Introducing the 3-LED mark sensor

Functions

■ Equipped with 3 LEDs: red, green and blue


To detect any marking, this sensor is equipped with red, green and blue LED light emitting elements all in one. In addition, it uses a coaxial reflective optics system and realizes high precision sensing when used with a 1/4000 resolution 12-bit A/D converter.



■ 2 selectable sensing modes for any application

Mark mode: This sensing mode automatically selects a single color from the 3 R-G-B LEDs to realize an ultra quick 45 μ s response time. The automatic optimal LED selection function automatically selects the LED that is most suitable for the sensing. This function is perfect for ultra quick sensing.

Color mode: All 3 R-G-B LEDs light up and high precision mark color discrimination occurs using the R-G-B reflective light ratio. This function enables effective detection of films with patterns around the areas of the mark.

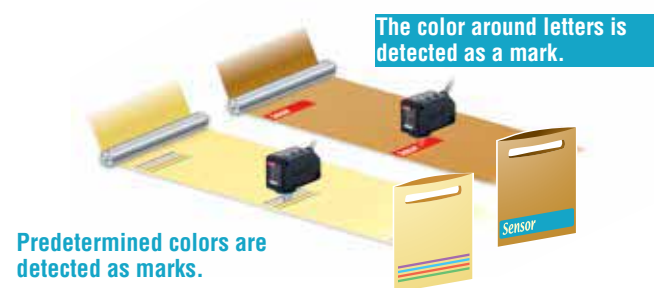

■ Even beginners can quickly master MODE NAVI operation

The sensor's basic operations are represented by 6 indicator lamps (MODE NAVI). The user can check what mode the sensor is presently in with a quick glance rendering operation simple.

Sensing status digitally controllable

The sensing status, displayed numerically, can be verified at a glance. Also, the sensor settings for each type of packing film can be digitally indicated.

Direct codes enable settings verification at a glance

The settings for the LX-100 series sensors are displayed using a 4-digit direct code. Direct codes enable easy settings verification and maintenance by phone.

Super simple teaching

Teaching (setting the threshold value) is simple, even in "Mark Mode" or "Color Mode". In addition, because teaching via an operation panel or other external input device is also possible, models can be easily interchanged.


Compact design for significant space savings

Cable and plug-in connector types are available depending on the equipment used. These sensors can be easily integrated into already existing systems.

Typical applications


Tube positioning

Detects printed marks to align tubes.



Mark detection

Mark detection of packaging film.



Technical specifications

Type		Cable	M12 plug-in connector type
Model no.	NPN output	LX-101	LX-101-Z (note 1)
	PNP output	LX-101-P	LX-101-P-Z
Sensing range	10±3mm		
Power supply	12 to 24VDC ±10%		
Output	2 x NPN or 2 x PNP open-collector transistor; max. 50mA		1 x NPN or 1 x PNP open-collector transistor; max. 100mA
Output operation	Mark mode: Light-ON/Dark-ON (auto-setting on teaching) Color mode: Consistent-ON/Inconsistent-ON (setting on teaching)		
Response time	Mark mode: max. 45µs; color mode: max. 150µs		
Sensitivity setting	Mark mode: 2-level teaching/Limit teaching; Color mode: 1-level teaching		
Protection	IP67 (IEC)		
Ambient temperature	-10 to +55°C		
Emitting element	Combined red/green/blue LED (Peak emission wave length: 640nm/525nm/470nm)		
Connection method	Cable 2m		M12 connector (note 2)
Dimensions (HxWxD)	35×24×57mm		35×24×71.5mm
Accessories	M4 screws with washers, 2 pcs.		

Notes:

- 1.) Suffix -Z=M12 connector type
- 2.) Cable is not included in delivery. Please select under accessories (page 127)

Photoelectric
Sensors

Fiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow Sensors

Inductive
Proximity
Sensors

Measurement
Sensors

Ionizers/
Electrostatic
Sensors

Accessories

Index

FX-100



EX-L200

Miniature laser sensor with
a built-in amplifier!



Features

■ Minute object sensing type EX-L211 (thru-beam)

The beam of the **EX-L200** series is purposely widened to have a lower beam density and little beam spread so that when detecting minute objects, even a slight change in the light received intensity will not be missed.

■ Minute detection (reflective)

With a repeatability of 0.02mm the sensor is perfectly suited for positioning tasks.

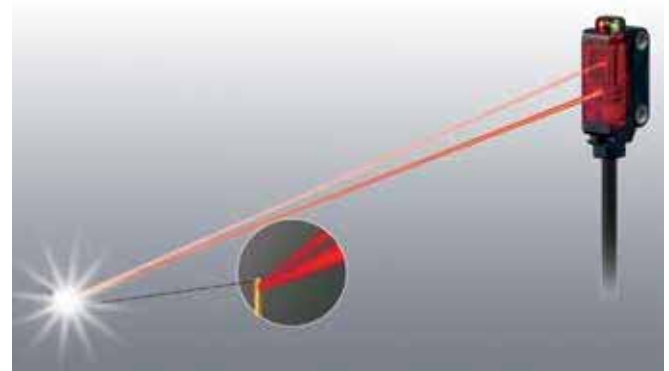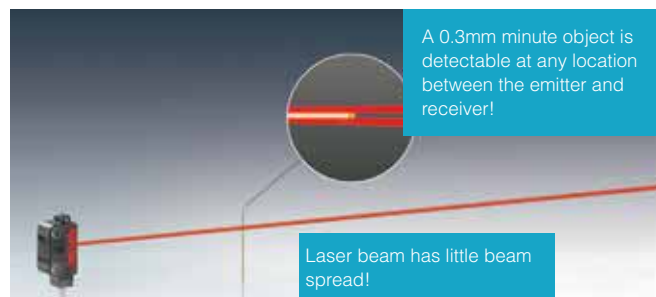


■ Environmental resistance

Thanks to the IP67 casing, the sensor is suitable for installation in humid and dusty environments.



■ Easy alignment

Beam alignment is carried out by looking at the red spot reflected on the beam alignment screen to match with the actual object. The optimum position can be understood at a glance by looking at the beam alignment screen and stability indicator (green).

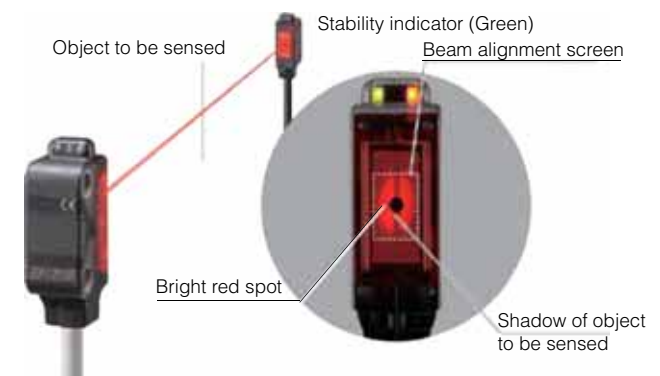

Easy adjustment by reflecting the shadow of the detection object.

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors


Accessories

Index


EX-L200

Typical applications


Detecting ICs that are out of position in multiple palettes




Detecting the tip of a very thin pipe



Detecting objects from an opening



Detecting very small objects



Technical specifications

Type		Thru-beam type		Retro reflective type	Diffuse reflective type		
					Spot reflective	Convergent reflective spot	Convergent reflective line spot
Model no.	NPN output	EX-L211	EX-L212	EX-L291	EX-L221	EX-L261	EX-L262
	PNP output	EX-L211P	EX-L212P	EX-L291P	EX-L221P	EX-L261P	EX-L262P
Sensing range		1m	3m	4m	45 to 300mm	20 to 50mm	20 to 70mm
Emission spot size		6x4mm at 1m	8x5.5mm at 1m	6x4mm at 1m	Ø 1mm at 300mm	Ø 1mm at 50mm (convergent point: 22mm)	1x5mm at 50mm (convergent point: 22mm)
Object to be sensed		Ø 2mm (opaque)	Ø 3mm (opaque)	Ø 25mm (opaque)	Opaque, transparent		
Power supply voltage		12 to 24V DC ±10%					
Output		PNP / NPN open-collector transistor, max. 50mA					
Response time		Max. 0.5ms					
Emitting element		Red semiconductor laser (class 1)					
Protection		IP67 (IEC)					
Ambient temperature		-10 to +55°C					
Material		Enclosure: PBT, front cover: acrylic; lenses: glass					
Connection method		Cable, 2m					
Dimensions (HxWxD)		25.9x 8.2x12mm		29.9x8.2x13mm		29.9x8.2x13.5mm	
Accessories		Mounting plates MS-EXL2-2 2 pcs.		Reflector RF330, mounting plate MS-EX-L2-3 1 pc.		Mounting plate MS-EX-L2-3 1 pc.	

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

EX-L200

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index


LS-400



Features

■ 4 types of identically sized sensor heads available

They are approximately the same size as general purpose photoelectric sensors, and the mounting method is identical.

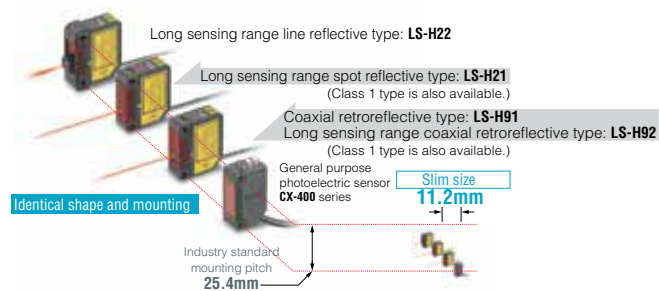

■ Coaxial reflective type with a long sensing range of 30m

The introduction of the LS-H92 long sensing range coaxial reflective type sensor means that even longer sensing ranges are now possible.

■ Spot size adjustment

The long sensing range spot reflective type and long sensing range line reflective type have a built-in spot-size adjuster that enables spot size adjustment according to the object for optimal setting.



LS-400

User-friendly, advanced high precision laser sensing!

■ Accurately senses the minutest variations

When sensing at close range or when the target objects are transparent or minute, adjust the sensor receiving sensitivity to one of 3 levels for the optimal setting. In addition, changing the receiving sensitivity will not affect the response time.


■ Easy setting, dual display

Equipped with 2 large 4-digit digital displays. While checking the current light-receiving amount (red display), the optimal threshold value (green display) can be set easily.



■ Wiring and space savings


The quick-connection cables enable reductions in wiring (connector type). The connections and man hours for the intermediate terminal block setup can be reduced and valuable space saved. Also LS-400 series amplifiers can be connected side-by-side with FX-300/FX-500 series fiber sensors.



Typical applications


Interference prevention

The automatic interference prevention function protects against interference among up to 4 sensors.



Emission halt function

Using the emission halt function, the laser beam can be stopped via external input, e.g. when a spot appears within the visual range of an image processor.




External teaching function

Teaching can be conveniently performed externally for laser sensors installed inside a device.



IC pin check from remote position



Checking protrusion of glass substrate



Technical specifications

Sensor heads

Type	Coaxial retroreflective		Diffuse reflective	
	Standard	Long sensing range type	Long sensing range spot-reflective	Long sensing range line reflective
Model no. (note 1)	LS-H91(F) (-A) (note 2)	LS-H92(F)	LS-H21(F) (-A) (note 2)	LS-H22(F) (note 3)
Sensing range	0.1 to 7m (U-LG) 0.1 to 5m (STD) 0.1 to 3m (FAST/H-SP)	0.2 to 30m (U-LG) 0.2 to 20m (STD) 0.2 to 10m (FAST/H-SP)	30 to 1.000mm (U-LG) 30 to 500mm (STD) 30 to 300mm (FAST/H-SP)	30 to 1.000mm (U-LG) 30 to 500mm (STD) 30 to 300mm (FAST/H-SP)
Ambient temperature	-10 to +55°C			
Emitting element	Red semiconductor laser, LS-H□ : Laser class 2, LS-H□-A : Laser class 1,			
Dimensions (W×H×D)	11.2×31×25mm			
Accessories	Reflector RF-330 1 pc., warning label (English) 1 pc.	Reflector RF-230 1 pc., warning label (English) 1 pc.	Warning label (English) 1 pc.	LS-MR1 Lens attachment for line reflective 1 pc., warning label (English) 1 pc.

Notes:

- 1.) **LS-Hx** conforms to IEC/JIS/GB standards
LS-HxF conforms to FDA/IEC/JIS standards
- 2.) **LS-H91(F)-A**, **LS-H21(F)-A**: Class 1 type
- 3.) **LS-H22(F)** = **LS-H21(F)** with the **LS-MR1** lens attachment for line reflective type

Amplifiers

Type	Connector type (note)	Cable type
Model no.	NPN output	LS-401
	PNP output	LS-401P
Power supply voltage	12 to 24VDC ±10%	
Output	PNP / NPN open-collector transistor, max. 100mA	
Output operation	Selectable either Light-ON or Dark-ON, with jog switch	
Response time	max. 80µs (H-SP), max. max. 150µs (FAST), max. 500µs (STD), max. 4ms (U-LG), selectable with jog switch	
Digital display	4 digit (green) and 4 digit (red) LED display	
Automatic interference prevention function	Incorporated (up to four sets of sensor heads can be mounted close together; however disabled when in H-SP mode)	
Ambient temperature	-10 to +55°C (If 4 to 7 sensors are mounted close together: -10 to +50°C) (If 8 to 16 sensors are mounted close together: -10 to +45°C)	
Connection method	Connector (note)	Cable, 2m
Dimensions (W×H×D)	10×30×75mm	

Note: The cable for amplifier connection is not supplied as an accessory with the connector type amplifier. Please select under accessories (page 127)




LS-500

Miniature laser head with user-friendly amplifier

Features


■ Different sensor heads available

The **LS-500** series of laser sensors offers four different laser heads. Select the appropriate shape of the heads depending on the requirements of your application.



■ Robust sensor head

The robust sensor head is made of stainless steel and can be used under rough mounting conditions. The type with M6 screws is mountable even in the smallest spaces. You can check immediately with the LED indicator at the receiver whether the light is received correctly.

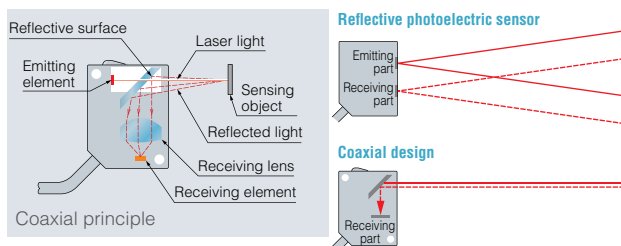

■ Highest precision


With the help of the coaxial precise light direction, the object sensing can be executed even through smallest openings. With a beam diameter of max. 6mm the retroreflective type has a sensing range of up to 2.5m.

■ Multifunctional amplifier

The LS-500 series amplifier with its clearly laid-out display offers a user-friendly design. The definition of settings, such as the adjustment of threshold values, database and logic functions, is quite simple. The model with the analog current output provides a comfortable reading out of measurement values.


■ Easy to combine

Due to its design and the possibility to mount the sensor on a DIN rail, the LS-500 can be connected quickly and easily to other sensors such as fiber amplifiers or pressure sensors.

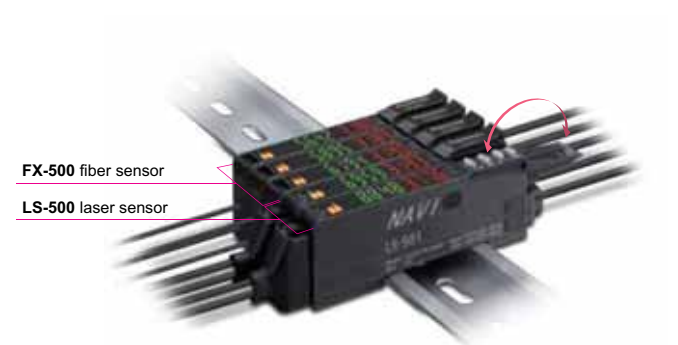

Typical applications


Position control of a workpiece



Detecting marks in a mold



Detecting workpieces through a worktop



Detection of a transparent foil



Technical specifications

■ Sensor heads

Type	Thru-beam		Coaxial reflective type	Coaxial retroreflective type
	Cylindrical	Rectangular	–	–
Model no.	LS-H101	LS-H102	LS-H201	LS-H901
Sensing range	1m	1m	600mm (U-LG), 300mm (STD), 150mm (H-SP)	0.01 to 2m (U-LG), 0.01-1m (STD), 0.01-1m (H-SP)
Ambient temperature	-10 to +55°C			
Emitting element	Red semiconductor laser (laser class 1)			
Dimensions (ØxD)/(HxWxD)	M6x30mm	8.2x26x12mm	6.4x24x18mm	
Accessories	M6 screws, 4 pcs., washer, 2 pcs.	MS-EXL2-2 (mounting plate) 2 pcs.	MS-LS-1 (mounting bracket) 1 pc.	MS-LS-1 (mounting bracket) 1 pc. RF-330 (reflector) 1 pc.

■ Amplifiers

Type		Connector type (note)	Cable type
Model no.	NPN output	LS-501	LS-501-C2
	PNP output	LS-501P	LS-501P-C2
Supply voltage	12 to 24V DC+10/-15%		
Output	PNP/NPN open-collector transistor, max. 50mA		
Analog output	-	4 to 20mA	
Output operation	Selectable either Light-ON or Dark-ON		
Response time	Max. 60µs (H-SP), 150µs (FAST), 250µs (STD), 500µs (LONG), 5ms (U-LG), 24ms (HYPR)		
Digital display	4 digit, dual LED display (green and red)		
Automatic interference prevention function	Built-in (up to 4 sensors: STD, LONG, U-LG, H-SP; up to 2 sensors: FAST; 0 sensors: HYPR)		
Ambient temperature	-10 to +55°C (if 4 to 7 units are mounted close together: -10 to +50°C, if 8 to 16 units are mounted close together: -10 to 45°C)		
Connection method	Connector (note)	2m cable	
Dimensions (HxWxD)	10x32x77mm		

Note: Cable is not included in delivery. Please select under accessories (page 127)

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

LS-500

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

ST4



ST4

Type 4 · PLe · SIL3

Cascadable thru-beam sensors

Features

■ Series connection of six sets of sensor heads to one controller

The concept of connecting six sets of sensor heads to one controller in series offers you maximum flexibility to solve your safety application.

■ Beam axis alignment and operation confirmation

The beam interruption indicator is incorporated in both the emitter and receiver. This indicator can be used not only to confirm operation but also to align the beam axis.

■ Compact sensor head saves space

The size of this type 4 long sensing range type is similar to general purpose photoelectric sensors.

■ IP67 (IEC)


The sensor heads can be used safely even in rough production environments.

■ Interference prevention

The emission amount adjuster can be used to prevent interference to the surrounding sensors.

■ Supports both PNP and NPN polarities

A single unit supports both PNP and NPN polarities, easing stock management.

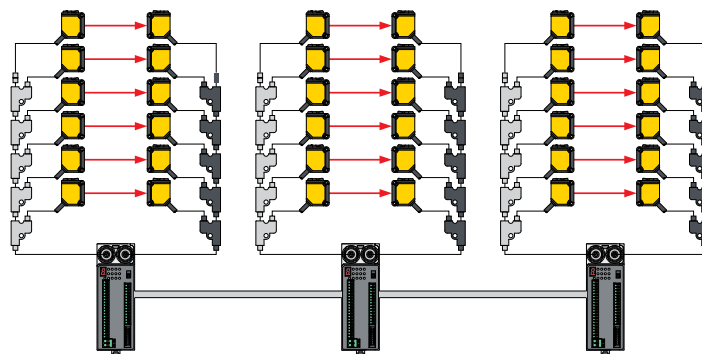

Connection of up to 3x6 units




Emission amount adjustment function

Typical applications

Protection for long sensing ranges

Guard areas up to 15m in length, for example where protective fences are difficult to install.



Protection for small openings

For small openings where light curtains do not fit, ST4 sensor heads ensure safety.



Protection against non-authorized entry

Sensor heads can be mounted flexibly and muting control implemented easily.



Technical specifications

■ Sensor heads

Type	Cable length 0.2m		Cable length 1.0m	
	–	With sensitivity adjuster	–	With sensitivity adjuster
Model no.	ST4-A1-J02	ST4-A1-J02V	ST4-A1-J1	ST4-A1-J1V
Safety category	Type 4, PL _e , SIL3			
Cascading	Up to 6 pieces to one controller			
Power supply	Supplied from controller (ST4-C11 or ST4-C12EX)			
Sensing range	0.1 to 15m			
Object to be sensed	Min. ø 9mm (opaque)			
Emitting element	Infrared LED			
Protection	IP67 (IEC)			
Ambient temperature	–10 to +55°C			
Material	Enclosure: PBT/Cover: acrylic			
Connection method	Cable with connector enclosed, 0.2m		Cable with connector enclosed, 1.0m	
Dimensions (HxWxD)	31x14x28mm			

■ Control device

Type	Standard	High-functional
Model no.	ST4-C11	ST4-C12EX
Safety category	Type 4, PL _e , SIL3	
Power supply	24VDC +10% / –15%	
Control outputs	OSSD1 and OSSD2 (2x PNP or 2x NPN transistor outputs with open collector, switchable, max. 200mA)	
Response time	ON → OFF: max. 25ms, OFF → ON: max. 140ms	
Current consumption	Max. 100mA (excluding sensor heads)	Max. 120mA (excluding sensor heads)
Protection	Enclosure: IP40 (IEC), Terminal: IP20 (IEC)	
Ambient temperature	–10 to +55°C	
Material	Enclosure: ABS	
Connection method	Connector (sensors), terminal block	
Dimensions (HxWxD)	130x46x80mm	

Note: For a system configuration, please contact your sales office or service hotline: +49 89 45354-2737



SF2B


Type 2 · PLd · SIL2

Excellent basic functions at a reasonable price

Features

■ Unit length = Protective height, “ZERO” blind zone

Non-wasteful installation is possible, with no dead corners within the sensing width.




■ Also suppresses mutual interference and effects of extraneous light

The tried and proven ELCA function suppresses operating errors resulting from mutual interference and the effects of extraneous light, and prevents drops in line efficiency rates from occurring.




■ Seamless structure using an inner enclosure

The internal unit fits into an inner enclosure, completely eliminating seams (joints) inside the product and conforming to IP67 (IEC).

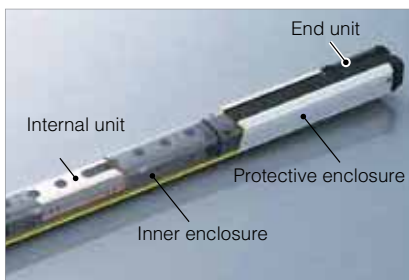

■ Digital error indicator

The digital error indicator supports the resolution of electrical problems when starting up lines.

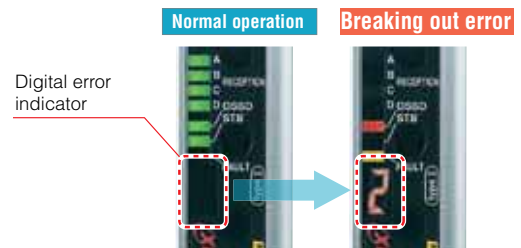

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers/ Electrostatic Sensors

Accessories

Index

SF2B

Technical specifications

Type	Hand protection type		Arm / Foot protection type	
Model no.	NPN output	SF2B-H□N (note)		SF2B-A□N
	PNP output	SF2B-H□P		SF2B-A□P
Safety category	Type 2, PLd, SIL2			
Sensing height	168 to 1912mm			
Sensing range	0.2 to 13m			
Resolution	20mm		40mm	
Object to be sensed	Min. Ø 27mm (opaque)		Min. Ø 47mm (opaque)	
Power supply	24VDC ±15%			
Response time	ON → OFF: max. 15ms / OFF → ON: max. 60ms			
Control outputs	OSSD1 and OSSD2 (2 x PNP or 2 x NPN open collector transistor, switchable), max. 200 mA			
Emitting element	Infrared LED			
Protection	IP65 (IEC)			
Ambient temperature	-10 to +55°C			
Material	Frame: aluminum, die-cast zinc / Inner unit: polycarbonate, polyester resin / Enclosure: PBT			
Connection method	Connector			
Dimensions (HxWxD)	Hx28x24mm (H= protective height)			

Note: For a system configuration, please contact your sales office or service hotline: +49 89 45354-2737

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

SF2B

Sensing height

Hand protection type	Model no.			Protective height (mm)	Installation height (mm)	No. of beam axes
	PNP type	NPN type	Sub sensors for serial connection			
	SF2B-H8-P	SF2B-H8-N	SF2B-H8SL	168	168	8
	SF2B-H12-P	SF2B-H12-N	SF2B-H12SL	232	232	12
	SF2B-H16-P	SF2B-H16-N	SF2B-H16SL	312	312	16
	SF2B-H20-P	SF2B-H20-N	SF2B-H20SL	392	392	20
	SF2B-H24-P	SF2B-H24-N	SF2B-H24SL	472	472	24
	SF2B-H28-P	SF2B-H28-N	SF2B-H28SL	552	552	28
	SF2B-H32-P	SF2B-H32-N	SF2B-H32SL	632	632	32
	SF2B-H36-P	SF2B-H36-N	SF2B-H36SL	712	712	36
	SF2B-H40-P	SF2B-H40-N	SF2B-H40SL	792	792	40
	SF2B-H48-P	SF2B-H48-N	SF2B-H48SL	952	952	48
	SF2B-H56-P	SF2B-H56-N	SF2B-H56SL	1112	1112	56
	SF2B-H64-P	SF2B-H64-N	SF2B-H64SL	1272	1272	64
	SF2B-H72-P	SF2B-H72-N	SF2B-H72SL	1432	1432	72
	SF2B-H80-P	SF2B-H80-N	SF2B-H80SL	1592	1592	80
	SF2B-H88-P	SF2B-H88-N	SF2B-H88SL	1752	1752	88
	SF2B-H96-P	SF2B-H96-N	SF2B-H96SL	1912	1912	96

Arm / Foot protection type	Model no.			Protective height (mm)	Installation height (mm)	No. of beam axes
	PNP type	NPN type	Sub sensors for serial connection			
	SF2B-A4-P	SF2B-A4-N	SF2B-A4SL	168	168	4
	SF2B-A6-P	SF2B-A6-N	SF2B-A6SL	232	232	6
	SF2B-A8-P	SF2B-A8-N	SF2B-A8SL	312	312	8
	SF2B-A10-P	SF2B-A10-N	SF2B-A10SL	392	392	10
	SF2B-A12-P	SF2B-A12-N	SF2B-A12SL	472	472	12
	SF2B-A14-P	SF2B-A14-N	SF2B-A14SL	552	552	14
	SF2B-A16-P	SF2B-A16-N	SF2B-A16SL	632	632	16
	SF2B-A18-P	SF2B-A18-N	SF2B-A18SL	712	712	18
	SF2B-A20-P	SF2B-A20-N	SF2B-A20SL	792	792	20
	SF2B-A24-P	SF2B-A24-N	SF2B-A24SL	952	952	24
	SF2B-A28-P	SF2B-A28-N	SF2B-A28SL	1112	1112	28
	SF2B-A32-P	SF2B-A32-N	SF2B-A32SL	1272	1272	32
	SF2B-A36-P	SF2B-A36-N	SF2B-A36SL	1432	1432	36
	SF2B-A40-P	SF2B-A40-N	SF2B-A40SL	1592	1592	40
	SF2B-A44-P	SF2B-A44-N	SF2B-A44SL	1752	1752	44
	SF2B-A48-P	SF2B-A48-N	SF2B-A48SL	1912	1912	48

Photoelectric Sensors
Fiber-optic Sensors
Standard Fibers
Fiber Sensors Communication Units
Mark Sensors
Laser Sensors
Safety Sensors
Pressure & Flow Sensors
Inductive Proximity Sensors
Measurement Sensors
Ionizers/ Electrostatic Sensors
Accessories
Index

SF2C



SF2C


Type 2 · PLc · SIL1

Very small safety light curtain with reduced wiring

Features


■ Dramatically less wiring work

The safety light curtain consists of only five wires for emitter and receiver, respectively. The implementation of this safety light curtain requires the same amount of time as mounting a conventional sensor.

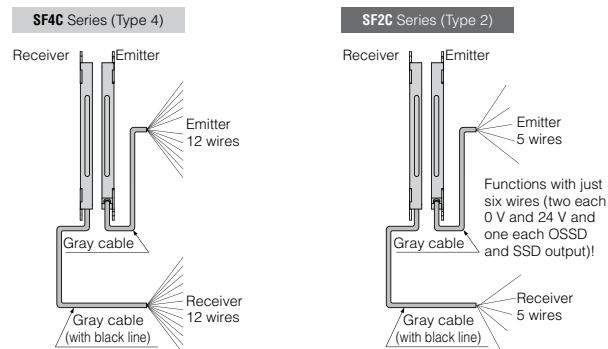

■ Beam axis alignment made easy

The emitter has an effective aperture angle of max. $\pm 5^\circ$ for an operating range of 3m. Compared to type 4 light curtains (which have an effective aperture angle of max. $\pm 2.5^\circ$), the SF2C series is easy to align and install.

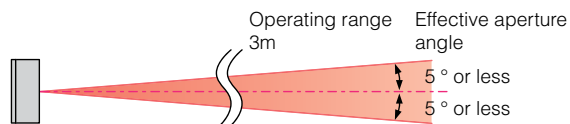

■ Light weight

The SF2C series is made of resin that is lighter than the conventional aluminum case type. Its lightweight body eases the burden on the mounting surface of the equipment and contributes to overall reduced weight during equipment transportation or overseas shipment.

■ Includes cables and mounting brackets

The SF2C series includes cables (3m) for use with all models and standard mounting brackets.



■ IP67 (IEC) protection

Even if the housing is made from polycarbonate, the IP67 (IEC) rating is achieved with an ultra-slim size for protection from environmental factors.

■ Slim size for efficient applications

Available work space is expanded from the previous model, and productivity is improved.

Usable work space approx. **12% UP** (60 mm)

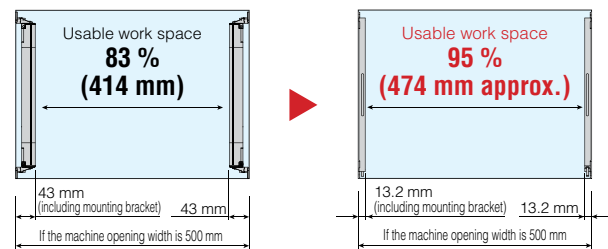

Technical specifications

Type	Hand protection type	
Model no.	NPN output	SF2C-H□N (note)
	PNP output	SF2C-H□P
Safety category	Type 2, PLc, SIL1	
Protective height	160 to 640mm	
Sensing range	0.1 to 3m	
Beam pitch	20mm	
Object to be sensed	Min. Ø 25mm (opaque)	
Supply voltage	24V DC ±20%	
Response time	ON → OFF: max. 20ms / OFF → ON: max. 100ms	
Control outputs	OSSD1 and OSSD2 (2 x PNP or 2 x NPN open collector transistor, switchable), max. 200 mA	
Emitting element	Infrared LED, 850nm	
Protection	IP67 (IEC)	
Ambient temperature	-10 to +55°C	
Material	Frame, sensor enclosure: Polycarbonate	
Connection method	Cable, 3m	
Dimensions (HxWxD)	Hx30x13.2mm (H= depending on protective)	

Note: For a system configuration, please contact your sales office or service hotline: +49 89 45354-2737

Protective height

Hand protection type	Model no.		Protective height (mm)	Installation height (mm)	No. of beam axes
	PNP type	NPN type			
	SF2C-H8-P	SF2C-H8-N	160	Max. 184	8
	SF2C-H12-P	SF2C-H12-N	240	Max. 264	12
	SF2C-H16-P	SF2C-H16-N	320	Max. 344	16
	SF2C-H20-P	SF2C-H20-N	400	Max. 424	20
	SF2C-H24-P	SF2C-H24-N	480	Max. 504	24
	SF2C-H28-P	SF2C-H28-N	560	Max. 584	28
	SF2C-H32-P	SF2C-H32-N	640	Max. 664	32

Options

Metal protection case (2 pcs. per set for emitter and receiver)

Applicable beam channels SF2C-H□	Model no.
8	MS-SFCH-8
12	MS-SFCH-12
16	MS-SFCH-16
20	MS-SFCH-20
24	MS-SFCH-24
28	MS-SFCH-28
32	MS-SFCH-32

MS-SFCH-8

MS-SFCH-□
(Excluding MS-SFCH-8)



Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

SF2C



SF4B (V2)

Type 4 · PLe · SIL3

New concepts combining greater safety and higher productivity!

Features

■ Sensor height = protective height

The length of the main unit equals the protective height so that installation is possible in places where space is limited. No blindzone occurs at the joints between light curtains when light curtains are connected in series.

■ Finger/hand and arm/foot protection available




■ Response time of 14ms and constant safety distance

A fast response time of 14ms has been achieved regardless of the number of beam channels, the beam axis pitches and the number of units connected in series. This reduces calculation work required for the safety distances.

■ A muting control function is provided to increase both safety and productivity

The light curtain is equipped with a muting control function that causes the line to stop only when a person passes through the light curtain, not when an object passes through.



■ Built-in safety relay

The light curtain has a built-in external device monitoring (EDM) function and an interlock function. The safety circuit is constructed so that a separate safety relay unit is not needed, and the control board is also more compact, both of which contribute to lower costs.

■ Improved ambient light immunity

The integrated ELCA function (Extraneous Light Check & Avoid) prevents interference from ambient light or other light curtains and even from welding plants.

■ Digital error indicator

If an error occurs, details of the error appear on the digital display so that maintenance can be carried out more quickly.



■ Universal design that can be used anywhere in the world

The SF4B series combines PNP transistor output and NPN transistor output in a single model. Overseas equipment that uses PNP, replacement with NPN sensors, factories that are positively grounded, and transfer of equipment overseas are all situations where the control circuits for a single model are suitable for use worldwide.

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories


Index

SF4B (V2)

Typical applications

Guarding space around welding robot

A spatter protection hood type perfect for welding devices is also available.

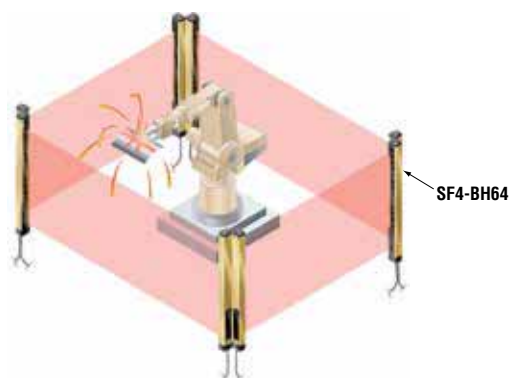

Technical specifications

Type	Finger protection type	Hand protection type	Arm / Foot protection type
Model no.	SF4B-F□(V2) (note)	SF4B-H□(V2)	SF4B-A□(V2)
Safety category	Type 4, PL e, SIL3		
Sensing height	230 to 1270mm	230 to 1910mm	
Sensing range	0.3 to 7m (depending on type up to 9m)		
Resolution	10mm	20mm	40mm
Object to be sensed	Min. Ø 14mm (opaque)	Min. Ø 25mm (opaque)	Min. Ø 45mm (opaque)
Power supply	24VDC +/-10%		
Response time	ON → OFF: max. 14ms / OFF → ON: max. 90ms		
Control outputs	OSSD1 and OSSD2 (2 x PNP or 2 x NPN open collector transistor, switchable), max. 200mA		
Emitting element	Infrared LED		
Protection	IP67 / IP65 (IEC)		
Ambient temperature	-10 to +55°C		
Material	Frame: Aluminium / Enclosures: Acrylic, Polycarbonate, ABS		
Connection method	Connector		
Dimensions (HxWxD)	Hx30x28mm (H= protective height)		

Notes: For a system configuration, please contact your sales office or service hotline: +49 89 45354-2737

Photoelectric
Sensors

Fiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow Sensors

Inductive
Proximity
Sensors

Measurement
Sensors

Ionizers /
Electrostatic
Sensors

Accessories

Index

SF4B (V2)

Sensing height

	Sensing range	Model no.	Protective height (mm)	Installation height (mm)	No. of beam axes		
Finger protection type	0.3-7m	SF4B-F23(V2)	230	286	23		
		SF4B-F31(V2)	310	366	31		
		SF4B-F39(V2)	390	446	39		
		SF4B-F47(V2)	470	526	47		
		SF4B-F55(V2)	550	606	55		
		SF4B-F63(V2)	630	686	63		
		SF4B-F71(V2)	710	766	71		
		SF4B-F79(V2)	790	846	79		
		SF4B-F95(V2)	950	1006	95		
		SF4B-F111(V2)	1110	1166	111		
		SF4B-F127(V2)	1270	1326	127		
		Hand protection type	0.3-9m	SF4B-H12(V2)	230	286	12
SF4B-H16(V2)	310			366	16		
SF4B-H20(V2)	390			446	20		
SF4B-H24(V2)	470			526	24		
SF4B-H28(V2)	550			606	28		
SF4B-H32(V2)	630			686	32		
SF4B-H36(V2)	710			766	36		
SF4B-H40(V2)	790			846	40		
SF4B-H48(V2)	950			1006	48		
SF4B-H56(V2)	1110			1166	56		
SF4B-H64(V2)	1270			1326	64		
0.3-7m	SF4B-H72(V2)			1430	1486	72	
	SF4B-H80(V2)		1590	1646	80		
	SF4B-H88(V2)		1750	1806	88		
	SF4B-H96(V2)		1910	1966	96		
	Arm / Foot protection type		0.3-9m	SF4B-A6(V2)	230	286	6
				SF4B-A8(V2)	310	366	8
SF4B-A10(V2)				390	446	10	
SF4B-A12(V2)		470		526	12		
SF4B-A14(V2)		550		606	14		
SF4B-A16(V2)		630		686	16		
SF4B-A18(V2)		710		766	18		
SF4B-A20(V2)		790		846	20		
SF4B-A24(V2)		950		1006	24		
SF4B-A28(V2)		1110		1166	28		
SF4B-A32(V2)		1270		1326	32		
0.3-7m		SF4B-A36(V2)		1430	1486	36	
	SF4B-A40(V2)	1590	1646	40			
	SF4B-A44(V2)	1750	1806	44			
	SF4B-A48(V2)	1910	1966	48			

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

SF4B (V2)



SF4B-C


Type 4 · PLe · SIL3

Mounts flush on aluminum frames

Features

■ Compact size

The **SF4B-C** series has been designed to mount flush with the aluminum frame. This means the machine opening will not be made any narrower. It can even be installed with zero blind zone.

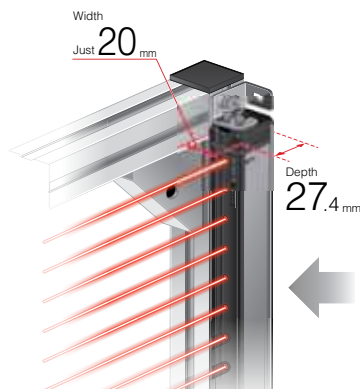

■ Easy mounting on aluminum frame



Buried mounting (side)

The light curtain mounts flush, even in installations with buried mounting.

- › There is no risk of workpieces bumping into the light curtain.

Rear mounting

- › The light curtain fits onto a 20 × 20mm aluminum frame perfectly.




■ The SFB-HC handy controller (optional)

offers easy access to settings for a range of functionality.



■ With the pigtailed type, the large indicator is easy to see also from the side

The SF4B-C series incorporates a large multi-purpose indicator (orange) positioned at workers' eye level. The indicator signals the presence of the light curtain, helping to prevent stoppages due to inadvertent interruption of its beams. The indicator can be used in a variety of applications, including as a muting indicator or operation indicator. The large multi-purpose indicator shines brightly through the plastic body to ensure exceptional visibility from the side.

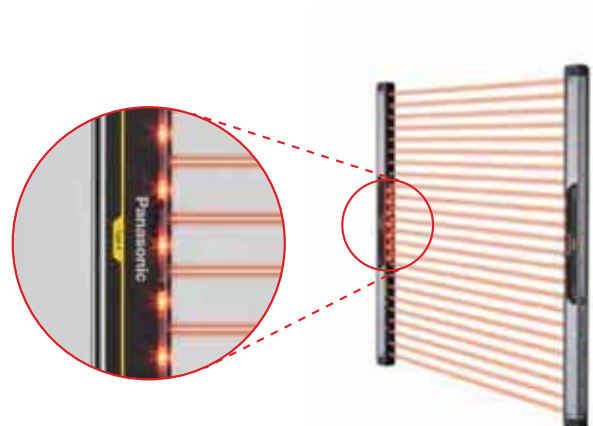

Technical specifications

Photoelectric Sensors
Fiber-optic Sensors
Standard Fibers
Fiber Sensors Communication Units
Mark Sensors
Laser Sensors
Safety Sensors
Pressure & Flow Sensors
Inductive Proximity Sensors
Measurement Sensors
Ionizers / Electrostatic Sensors
Accessories
Index

Type	Pigtailed type (note 1, 2)		Cable type	
	Hand protection type	Arm protection type	Hand protection type	Arm protection type
Model no.	SF4B-H12CA-J05	SF4B-A12CA-J05	SF4B-H12C	SF4B-A12C
Safety category	Type 4, PLe, SIL3			
Protective height	263.4 to 1943.4mm			
Sensing range	0.1 to 7m			
Beam pitch	20mm	40mm	20mm	40mm
Object to be sensed	Min. Ø 25mm (opaque)	Min. Ø 45mm (opaque)	Min. Ø 25mm (opaque)	Min. Ø 45mm (opaque)
Supply voltage	24V DC ±10%			
Response time	ON → OFF: max. 14ms / OFF → ON: max. 90ms			
Control outputs	OSSD1 and OSSD2 (2 x PNP or 2 x NPN open collector transistor, switchable), max. 200mA			
Emitting element	Infrared LED, 850nm			
Protection	IP65 (IEC)			
Ambient temperature	-10 to +55°C			
Material	Polycarbonate			
Connection method	12-wire PVC cable with connector, 0.5m		8-wire PVC cable, 5m	
Dimensions (HxWxD)	Hx20x27,4mm (H= depending on protective height)			

Notes:

- 1.) For a system configuration, please contact your sales office or service hotline: +49 (0) 89-45354-2737
- 2.) Integrated muting function

SF4B-C

Protective height

	Model no.		Protective height (mm)	Installation height (mm) (note)	No. of beam axes
	Pigtailed type (note)	Cable type			
Hand protection type	SF4B-H12CA-J05	SF4B-H12C	263.4	294.4	12
	SF4B-H16CA-J05	SF4B-H16C	343.4	374.4	16
	SF4B-H20CA-J05	SF4B-H20C	423.4	454.4	20
	SF4B-H24CA-J05	SF4B-H24C	503.4	534.4	24
	SF4B-H28CA-J05	SF4B-H28C	583.4	614.4	28
	SF4B-H32CA-J05	SF4B-H32C	663.4	694.4	32
	SF4B-H36CA-J05	SF4B-H36C	743.4	774.4	36
	SF4B-H40CA-J05	SF4B-H40C	823.4	854.4	40
	SF4B-H48CA-J05	SF4B-H48C	983.4	1014.4	48
	SF4B-H56CA-J05	SF4B-H56C	1143.4	1174.4	56
	SF4B-H64CA-J05	SF4B-H64C	1303.4	1334.4	64
	SF4B-H72CA-J05	SF4B-H72C	1463.4	1494.4	72
	SF4B-H80CA-J05	SF4B-H80C	1623.4	1654.4	80
	SF4B-H88CA-J05	SF4B-H88C	1783.4	1814.4	88
	SF4B-H96CA-J05	SF4B-H96C	1943.4	1974.4	96
Arm protection type	SF4B-A8CA-J05	SF4B-A8C	343.4	374.4	8
	SF4B-A12CA-J05	SF4B-A12C	503.4	534.4	12
	SF4B-A16CA-J05	SF4B-A16C	663.4	694.4	16
	SF4B-A20CA-J05	SF4B-A20C	823.4	854.4	20
	SF4B-A24CA-J05	SF4B-A24C	983.4	1014.4	24
	SF4B-A28CA-J05	SF4B-A28C	1143.4	1174.4	28
	SF4B-A32CA-J05	SF4B-A32C	1303.4	1334.4	32
	SF4B-A36CA-J05	SF4B-A36C	1463.4	1494.4	36
	SF4B-A40CA-J05	SF4B-A40C	1623.4	1654.4	40
	SF4B-A44CA-J05	SF4B-A44C	1783.4	1814.4	44
	SF4B-A48CA-J05	SF4B-A48C	1943.4	1974.4	48

Note: The installation height depends on the mounting bracket. Specifications with standard mounting bracket **MS-SF4BC-1**



SF4C

Type 4 · PLe · SIL3

Ultra-slim light curtain safeguards machines without sacrificing productivity


Features

■ Large, built-in, multi-purpose LED indicators

Large LED bars on each side of the light curtain provide a wide visibility indicator that can be customized for various applications by means of independent external inputs. The indicator can be used as an operation indicator (muting) or job indicator, etc.

■ Finger/hand protection

The **SF4C** series covers a sensing height of 160mm to 640mm. This is true for the finger and hand protection types (resolution up to 10 or 20mm).

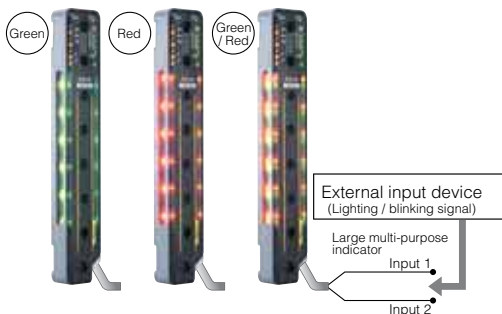

■ Can be used in a variety of applications for simplified equipment (large multi-purpose indicator)

Wire-saving when connecting to safety devices. Contact outputs such as emergency stop switches or safety door switches can be connected to the light curtain. Also, by using the handy-controller **SFC-HC**, up to three sets of light curtains can be cascade connected for a consolidated safety output.

■ IP67 (IEC)

An IP67 (IEC) rating is achieved with an ultra-slim size for protection from environmental factors.

■ Mutual interference is reduced without need for interference prevention lines

The light curtain is equipped with the ELCA (Extraneous Light Check & Avoid) function, which has been proven to be strong against mutual interference. Because it automatically shifts the scanning time of the light curtain in order to avoid interference, it is not necessary to wire interference prevention lines between machinery.

■ A fast response time of 7ms* for all models

A fast response time of 7ms* for all models regardless of the number of beam channels. This reduces the safety distance as well as the calculation work required for the safety distance among models with different beam channels.

* When connecting safety sensors (light curtains, etc.) to the safety input, the response time will be the total time of connected units.

■ Safety, productivity, and cost reduction [muting control function]

The muting sensors and muting lamps can be connected directly to the light curtain. Furthermore, the large multi-purpose indicators can be used as muting lamps, which contribute to less wiring troubles, improvement of safety, productivity, and cost reduction.

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories


Index

SF4C

Typical applications


Use of internal muting lamp

There is no need to buy and install a separate muting lamp.



Selective muting area

Separate muting control function for each beam channel.



Industry first!

Wire-saving when connecting to safety devices (safety input function).



Technical specifications

Type	Finger protection type	Hand protection type
Model no.	SF4C-F□ (note)	SF4C-H□
Safety category	Type 4, PLe, SIL3	
Sensing height	Depending on types (160 to 640mm)	
Sensing range	0.1 to 3m	
Resolution	10mm	20mm
Object to be sensed	Min. Ø 14mm (opaque)	Min. Ø 25mm (opaque)
Power supply	24VDC +10/-15%	
Control outputs	OSSD1 and OSSD2 (2x PNP or 2x NPN transistor outputs with open collector, switchable, max. 200mA)	
Response time	ON → OFF max. 9ms / OFF → ON max. 90ms	ON → OFF max. 7ms / OFF → ON max. 90ms
Rated current consumption	Max. 270mA (depending on type)	
Protection	IP67 / IP65 (IEC)	
Ambient temperature	-10 to +55°C	
Material	Polycarbonate	
Connection method	Cable, 5m or 0.5m with connector	
Dimensions (HxWxD)	Hx13.2x30mm (H= protective height)	

Note: For a system configuration, please contact your sales office or service hotline: +49 89 45354-2737

Sensing height

Finger protection type	Model no.		Protective height (mm)	Installation height (mm)	No. of beam axes
	Cable type	Cable with connector			
	SF4C-F15	SF4C-F15-J05	160	160	15
	SF4C-F23	SF4C-F23-J05	240	240	23
	SF4C-F31	SF4C-F31-J05	320	320	31
	SF4C-F39	SF4C-F39-J05	400	400	39
	SF4C-F47	SF4C-F47-J05	480	480	47
	SF4C-F55	SF4C-F55-J05	560	560	55
	SF4C-F63	SF4C-F63-J05	640	640	63

Hand protection type	Model no.		Protective height (mm)	Installation height (mm)	No. of beam axes
	Cable type	Cable with connector			
	SF4C-H8	SF4C-H8-J05	160	160	8
	SF4C-H12	SF4C-H12-J05	240	240	12
	SF4C-H16	SF4C-H16-J05	320	320	16
	SF4C-H20	SF4C-H20-J05	400	400	20
	SF4C-H24	SF4C-H24-J05	480	480	24
	SF4C-H28	SF4C-H28-J05	560	560	28
	SF4C-H32	SF4C-H32-J05	640	640	32



SD3-A1


Type 3 · PLd · SIL2

Monitor dangerous areas for unauthorized entry using flexible detection zones!

Features


■ Freely configurable zones

Two zones can be monitored with the SD3-A1: the warning zone within a radius of 15m, and the protection zone within a radius of 4m. You can configure the contours of these zones to perfectly accommodate any application. You can configure up to eight zone patterns and switch between them at any given time, even during operation. This flexible zone configuration can be done by PC.

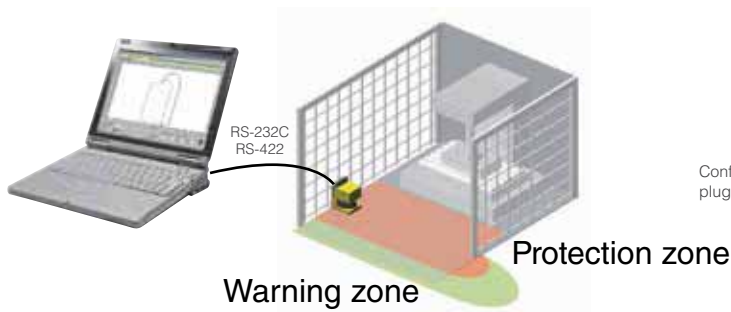

■ Monitors beam misalignment after installation of safety laser scanner

By activating the reference boundary function which enables constant detection of stationary objects, the safety laser scanner memorizes the position of stationary objects, and monitors for beam misalignment after installation.

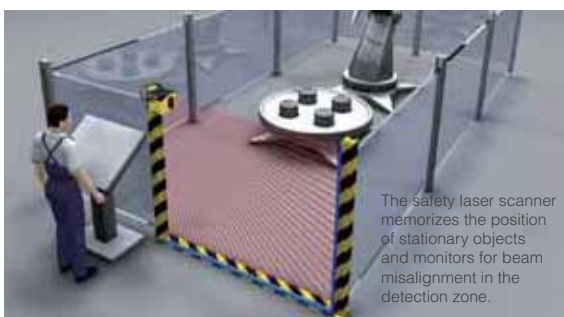

■ Adjustment of response times enables interference prevention

The response time can be adjusted from 80 to 640ms. Mutual interference can be prevented by adjusting the response time when setting up multiple safety laser scanners in close vicinity.



■ Memorized configurations make post-maintenance recovery easy (optional)

Configurations can be saved in the optional configuration plug's built-in memory and reloaded after maintenance or exchanging safety laser scanners.

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

SD3-A1

Typical applications

Detecting entry into dangerous areas at processing machines

Warning and machine halt zones are implemented to detect workers in dangerous areas.



Confirming safety around automatically guided vehicles

The scanner is used to slow down the vehicle upon detection in the warning zone and stop the vehicle upon entering the protection zone.



Detecting presence in a defined field

Install two safety laser scanners to build a protection zone surrounding the object in question. Deactivating the zone is also possible.



Guarding the sides of automatic guided vehicles (AGV)

Prevent injuries from a moving AGV. Monitor fallen cargo to avoid collisions.



Detecting entry into dangerous areas of circular cycle tables

One safety laser scanner can safeguard the front opening where in the past two sets of light curtains were needed.



Detecting entry into robot working areas

The scanner detects a human body whenever it enters the field.



Technical specifications

Type		Safety laser scanner				
Model no.		SD3-A1				
Safety category		Type 3, PLd, SIL2				
Protection zone	Object to be sensed	ø150mm	ø70mm	ø50mm	ø40mm	ø30mm
	Sensing range (radius)	0 to 4.0m	0 to 4.0m	0 to 2.8m	0 to 2.2m	0 to 1.6m
Warning zone	Object to be sensed	ø150mm (fixed)				
	Sensing range (radius)	0 to 15m				
Scanning angle		190° / 180° (by setting)				
Measurement zone		Max. (radius) 50m				
Number of zone settings		Max. 7 + 1 (without detection zone)				
Min. zone setting range		200mm				
Power supply		24VDC+20/-30%				
Control outputs		OSSD 1 and OSSD 2 (2x PNP open collector transistor outputs; max. 250mA)				
Laser protection class		Class 1 (IEC)				
Protection		IP65 (IEC)				
Ambient temperature		0 to +55°C				
Material		Main body: die-cast aluminum, Scanner window: plastic				
Accessories		15-pin connector, 9-pin connector, installation and instruction manual, configuration and evaluation software, mounting screws				



SQ4

Type 4 · PLe · SIL3

Safe leakage monitoring

Features

■ Two-stage monitoring

The **SQ4** series two-stage monitoring enables the sensors to differentiate between minor leaks that have just started and serious leaks that require immediate action.

■ Also suitable for chemicals


In addition to the standard type, types with PFA enclosures that are resistant to the most common chemicals are also available.

■ Operating without control unit

The sensor SQ4 can operate alone without a control unit, meaning it can replace existing systems easily.

■ Networking

You can connect up to four SQ4 leakage sensors with the control unit SQ4-C11, minimizing wiring efforts.

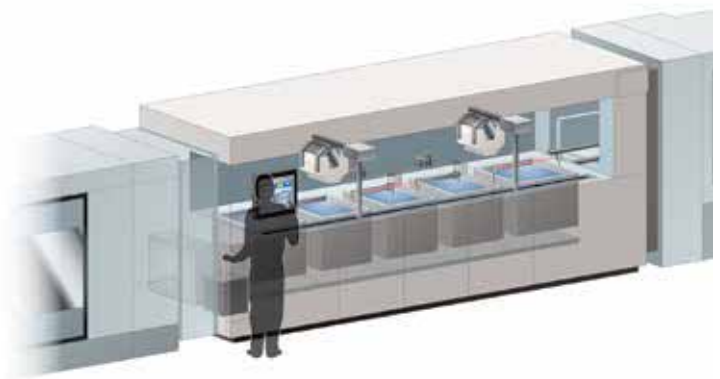

Photoelectric
Sensors

Fiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow Sensors

Inductive
Proximity
Sensors

Measurement
Sensors

Ionizers/
Electrostatic
Sensors

Accessories

Index

SQ4

Technical specifications

Sensor heads

Type		Water	Other liquids
Model no.	NPN output	SQ4-A21-N	SQ4-A22-N
	PNP output	SQ4-A21-P	SQ4-A22-P
Safety category		Type 1 PLC, SIL1 (with controller Type 4, PLe, SIL3)	
Tolerable liquids		Water	Sulfuric acid, ammonia, galdden, fluorinert, fluorine, etc.
Response time		Max. 10ms (ON → OFF)	
Power supply		12 to 24VDC ±10%	
Output		PNP / NPN open-collector transistor, max. 50mA	
Rated current consumption		Max. 30mA	
Material		Polypropylene	PFA
Protection		IP65/IP67 (IEC)	
Ambient temperature		-10 to +55°C	
Connection method		Cable, 2m	
Dimensions (ØxH)		35.8x18.7mm	

Controller

SQ4

Model no.	SQ4-C11
Safety category	Type 4, PLe, SIL3
Response time	Max. 20ms (ON → OFF)
Power supply	24VDC +10/-15%
Control outputs	OSSD1 and OSSD2 (2x PNP or 2x NPN transistor outputs with open collector, switchable, max. 200mA)
Features	Interlock / Lockout cancel / Test input / External device monitor / Safety input
Rated current consumption	Max. 200mA
Protection	IP20 (IEC)
Ambient temperature	-10 to +55°C
Material	Polycarbonate/ABS
Connection method	Connector (sensors), terminal block
Dimensions (HxWxD)	100x48x66mm

Note: For a system configuration, please contact your sales office or service hotline: +49 89 45354-2737

Mounting bracket set

Type	Water		Other liquids	
	MS-SQ-21	MS-SQ-22	MS-SQ-23	MS-SQ-24
Object to be sensed	Water etc.	Liquids with comparatively high surface tension such as Sulfuric acid, Hydrochloric acid, Phosphoric acid, and Ammonia	Liquids with comparatively low surface tension such as Fluorinert (note), Galdden (note), and Hydrogen fluoride	Liquids such as low-concentration hydrogen fluoride

Connectors

Type	Water	Other liquids
Model no.	CN-EP2	CN-EP3
Description	Hook-up connector (e-CON); 5 per set	



Safety switches

Switches to round up the safety portfolio

Features

■ Safety door switches

The SG-B1 series and the SG-A1 series are among the world's thinnest safety door switches. The SG-B1 series features a solenoid interlock and five built-in contacts. The SG-A1 series safety door switch comes with three built-in contacts. Different types of actuators available.

■ Key lock door switch

Key selector switches protect workers in larger areas that could be hazardous. The **SG-B2** series safety door switch and the **SG-D1** series key selector switch can be used in tandem to add multiple layers of protection.

Key selector switch
SG-D1 series



Only one key

Key lock door switch
SG-B2 series



■ Emergency stop switches

The **SG-E1** series is an emergency stop (E-Stop) switch with push-to-lock and turn-to-reset functionality. For use as an emergency shutoff for the semiconductor industry, models are adhering to SEMI standards (EMO) are also available.



■ Grip switches

The **SG-C1** series is a grip switch which allows operators who are currently in a hazardous area to operate machines safely. With three grip positions and multiple operating patterns, the SG-C1 series can be used in many different applications.



Photoelectric
Sensors

Fiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow Sensors

Inductive
Proximity
Sensors

Measurement
Sensors

Ionizers/
Electrostatic
Sensors


Accessories

Index


Safety
switches

Typical applications


Safety door switch with key




Safety door switch with key for selective area control



Grip switch with a lightweight design for enhanced mobility



Changing settings with a key



Technical specifications

Model. No.	SG-A1	SG-B1	SG-B2	SG-D1	SG-E1	SG-C1
Type	Safety door switch			Key lock door switch	Emergency stop switch	Grip switch
Applicable standards	EN 1088, IEC 60947-5-1, EN 60947-5-1, GS-ET-15, UL 508, CSA C22.2 No. 14	EN 1088, IEC 60947-5-1, EN 60947-5-1, GS-ET-19, UL 508, CSA C22.2 No. 14		JIS C 8201-5-1, IEC 60947-5-1, EN 60947-5-1, UL 508 (UL listed Certification), CSA 22.2 No.14 (c-UL listed Certification)		IEC 60947-5-1, EN 60947-5-1, JIS C 8201-5-1, GS-ET-22, UL 508, CSA C22.2 No. 14
Mechanical lifetime	Min. 1000000 switching cycles			Min. 100000 switching cycles	Min. 500000 switching cycles	Position 1→2→1: min. 1000000 switching cycles, Position 1→2→3→1: 100000 switching cycles
Electrical switching life	Min. 1000000 switching cycles			Min. 100000 switching cycles	Min. 500000 switching cycles	Min. 100000 switching cycles
Max. operating frequency	1200 switching cycles/hour	900 switching cycles/hour		1200 switching cycles/hour	900 switching cycles/hour	1200 switching cycles/hour
Startup speed actuator	0.05 to 1.0m/s			-	-	-
Torque	Min. 60N	Min. 60N	Min. 80N	-	-	-
Ambient temperature	-25 to +70°C	-25 to +50°C	-25 to +70°C	-25 to +60°C		
Degree of protection	IP67 (IEC)		IP65 (IEC)	Front: IP65 (IEC)	Front: IP65 (IEC)	IP66 / IP67: with additional switch and pilot light, IP65: with additional switch and /or pilot light
Pollution degree	3 (inside 2)			3		3 (inside 2)
Dimensions (HxWxD)	78x30x15mm	75x75x15mm	152x35x40mm	63.8x41.4x29.4mm 2 contact blocks (without key), 83.8x41.4x29.4mm 4 contact blocks (without key)	81x41.4x29, 4mm 2 contact blocks, 101.4x41.4x29, 4mm 3 contact blocks	198x62x83mm (with cable gland)

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

Safety switches




SF-C21

Control unit for multiple safety solutions

Features

Space-saving and easy to wire

- › One **SF-C21** can do the work of four safety relay units.
Input: 10 points / Output: 8 points
- › Compact size
(height 97 mm × width 45 mm)



Application-based customization

- › Easy to create reliable safety circuit
- › Configurator SF-C software to build own safety circuits



Absolutely no programming skills required

- › Eight preset logics, safety-certified and compatible to control category 4 PLe
- › The OFF delay time can be easily set by turning the rotary switch
- › Password protection prevents inadvertent changes to the logic

Easy to monitor status with a PLC

- › Four auxiliary outputs are provided
- › RS-485 communications (MODBUS RTU)



Technical specifications

Model. no.	SF-C21	
Safety standards	IEC 61508-1 to 7, EN 61508-1 to 7(SIL3), ISO 13849-1 (up to Category 4, PLe), IEC 61131-2, IEC 61010-2-201, IEC 62061(SILCL3), UL 61010-1, UL 61010-2-201	
EMC standards	IEC 61000-6-2, IEC 61326-3-1, EN 55011	
Related standards	IEC 60947-1, IEC 60947-5-1, IEC 60947-5-2, IEC 60947-5-5, IEC 60947-5-8, IEC 61496-1, IEC TS 62046, ISO 13851	
Safety input	2 × 4 inputs (ON → OFF max. 0.7ms; OFF → ON max. 10ms)	
Safety control output	PNP open-collector transistor with 2 outputs × 2 (ON → OFF max. 10ms; OFF → ON max. 100ms)	
Auxiliary output	PNP open-collector transistor with 1 output × 4 (Any of the auxiliary outputs can be customized using the software tool)	
Logic selection function	No. 0: Customization control No. 2: Parallel muting control No. 4: Partial stop control 1 No. 6: Two-hand control No. 8: Operation mode selection control	No. 1: Overall stop control No. 3: Sequential muting control No. 5: Partial stop control 2 No. 7: OR control
Communication	RS-485: Detachable spring-cage terminal block, USB: Mini-B male	

Note: We also offer the safety control unit **SF-C10 series** (see next page), which is ideal for controlling Panasonic's safety light curtain, because its connectors make wiring easier



SF-C10

Less setup time for safety light curtains

Features


■ Supports both PNP and NPN polarities

A single unit can be used for PNP / NPN input switching, reducing the number of parts that need to be registered.

■ Removable terminal blocks reduce maintenance time

Removable terminal blocks are used. This reduces the work required for reconnecting wiring during maintenance

Removable!
Uses a spring method



■ Metal enclosure with an IP65 (IEC) protective structure

The strong metal enclosure has a built-in safety relay. It has an IP65 protective structure so that it can be set up individually without needing to be inserted into a control panel.



Connector in metal housing

■ Slim design

22.5mm thickness for insertion even into narrow spaces inside panels.



SF-C13

■ Three safety circuit systems packaged into a single unit!

SF-C14EX

The unit has three different built-in safety circuits: Output circuit of the safety light curtain, muting safety circuit, and emergency stop safety circuit.



SF-C12

Coming soon!

SF4D

- › Compact – 30 x 28mm
- › Robust with continuously cast aluminum housing
- › Long-range sensing of up to 15m
- › Oil and dirt resistant






DP-0

Compact and easy-to-use
pressure sensor

Features

RUN and detailed setting mode

Pressure sensors of the DP-0 series operate in two different modes. RUN mode is used for quick access to settings like threshold values, zero point, and key lock functions. The detailed setting mode offers additional settings such as selecting the pressure unit or the response time. The two modes together help to achieve an optimum sensor performance.

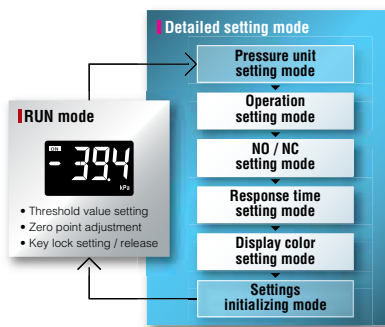

Functional design

The unit body is completely black to make the LCD display easier to see. The keys offer a firm and crisp clicking feel, thus making operating the sensor smooth and reliable.


Compact & lightweight design

The unit body measures only 24.9mm in depth, which allows installation in a narrow space. The body weighs only 25g. The low weight is very advantageous if the sensor has to be mounted on moving parts, e.g. robot arms.



Low and high pressure type available

The low pressure type can be used with positive or negative pressure. It is ideal for suction applications where it indicates malfunctions due to pressure changes. The high pressure type is suitable for positive pressure of up to 1MPa. It is ideal for applications where a reference pressure needs to be checked.

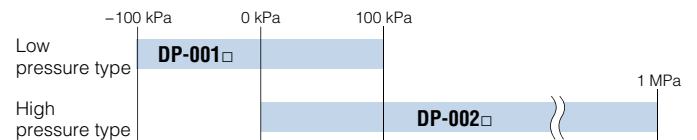Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors


Accessories

Index


DP-0

Typical applications

Monitoring suction pressure on electronic components



Checking reference pressure



Technische Daten

Type		Low pressure type	High pressure type
Model no.	PNP	DP-001-P	DP-002-P
	NPN	DP-001	DP-002
Type of pressure		Gauge pressure	
Rated pressure range (note 2)		-1 to +1bar (-100 to +100kPa)	0 to +10bar (0 to 1MPa)
Pressure withstandability		5bar (500kPa)	15bar (1.5MPa)
Applicable fluid		Non-corrosive gas	
Supply voltage		12 to 24V DC \pm 10%	
Output		3x NPN or PNP transistor, max. 50mA	
Response time		2.5, 25, 250ms (switchable)	
Pressure port		M5 female thread	
Degree of protection		IP40	
Ambient temperature		-10 to +50°C	
Material		Resin body type	
Connection method		Connector (note 1)	
Dimensions (HxWxD)		30x30x25mm	
Accessories		CN-14A-C2 connector-attached cable 2m, 1 pc	

Notes:

- 1.) The 2m cable **CN-14A-C2** is included
- 2.) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20°C. Reference pressure 1atm

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

DP-0



DP-100

Pressure sensors with dual display

Features


- **The current and threshold values can be checked at the same time!**




- **Dual display allows direct setting of threshold value**

Equipped with a 30mm square compact dual display. Because the current and threshold value can be checked at the same time, the threshold value can be set and checked smoothly without having to switch screen modes.

- **3-color display (red, green, orange)**

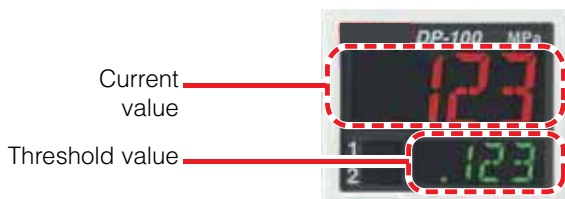

The main display color changes depending on the output status (ON/OFF operation) and while settings are being made. The sensor status can therefore be understood easily, and operating errors can be reduced.

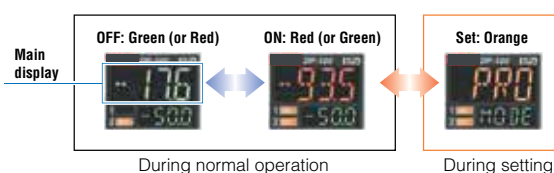

- **Easy-to-read digital display!**

A clear 12-segment make numbers and letters easy to read.

- **High performance**




The low pressure type displays measurements in 0.1kPa at a resolution of 1/2000 and has a response time of 2.5ms (variable up to 5000ms). Moreover it boasts $\pm 0.5\%$ F.S. temperature characteristics and $\pm 0.1\%$ F.S. repeatability.

For low pressure

- **Copy function saves time and reduces human error**

Sensors can be connected to a master sensor one by one and settings copied to them. When making the same settings for multiple sensors, this prevents setting errors from occurring and reduces the number of changes required to instruction manuals when equipment designs are changed.




- **Equipped with auto-reference and remote zero-adjustment functions A precise pressure management is possible**

If the reference pressure of the device changes, the auto-reference function partially shifts the comparative output judgment level by the amount that the reference pressure shifts and resets the display value to zero. These functions are ideal for places where the reference pressure fluctuates wildly, or where fine settings are desired.

Typical applications


Confirming suction of electronic component



Confirming reference pressure



Leak test for PET bottles



Technical specifications

Cable types

Type	Standard		High-function controller	
Model no.	Asian	European	DP-101A	DP-102A
	M5 female thread	Short porttype	DP-101A-E-P	DP-102A-E-P
			DP-101A-M-P	DP-102A-M-P
Rated pressure range (note 3)	-1bar to +1bar (-100.0 to +100.0kPa)		-1bar to +10bar (-0.1 to +1.0MPa)	-1bar to +1bar (-100.0 to +100.0kPa)
Applicable fluid	Non-corrosive gas			
Power supply	12 to 24V DC ±10%			
Output	PNP / NPN open-collector transistor, max. 100mA			
Response time	2.5ms, 5ms, 10ms, 25ms, 50ms, 100ms, 250ms, 500ms, 1000ms, 5000ms, selectable by key operation			
Display	3-color LCD display, 12 segments, 4 digits			
Pressure port	Asian: M5 female thread + R (PT) 1/8 male thread European: M5 female thread + G 1/8 male thread			
Connection method	Connector (note 2)			
Dimensions (HxWxD)	30x30x42.5mm			
Accessories	CN-14A-C2 Connector attached cable 2m, 1 pc.			

Notes:

- 1.) Suffix-E = Air supply M5 female thread and G 1/8 male thread
- 2.) Suffix-M = M5 short port type
- 3.) Suffix-P = PNP output
- 4.) CN-14A-C2 cable 2m is included in delivery
- 5.) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20°C. Reference pressure=1atm

M8 connector types

Type	Standard		Multifunction	
Model no.	DP-111-E-P-J	DP-112-E-P-J	DP-111A-E-P-J	DP-112A-E-P-J
Rated pressure range (note 1)	-1bar to +1bar (-100.0 to +100.0kPa)		-1bar to +1bar (-100.0 to +100.0kPa)	-1bar to +10bar (-0.1 to +1.0MPa)
Applicable fluid	Non-corrosive gas			
Power supply	12 to 24V DC ±10%			
Output	PNP open-collector transistor, max. 100mA			
Response time	2.5ms, 5ms, 10ms, 25ms, 50ms, 100ms, 250ms, 500ms, 1000ms, 5000ms, selectable by key operation			
Analog volt. output / external input	—		Incorporated	
Ambient temperature	-10 to +50°C			
Pressure port	G1/8 male thread + M5 female thread			
Material	Enclosure: PBT (glass fiber reinforced); LCD display: Acrylic; Pressure port: Stainless steel (SUS303); Thread part: Brass (nickel plated); Switch part: Silicone rubber, M8 connector part: Nickel-plated brass/brass gold plated contacts			
Connection method	M8 connector (note 2)			
Dimensions (HxWxD)	30x30x47.5mm			
Accessories	Unit selection plate: 1 set			

Notes:

- 1.) Where measurement conditions have not been specified precisely, the conditions used were an ambient temperature of +20°C. Reference pressure=1atm
- 2.) Cable not included in delivery, please select under accessories (page 127)

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

DP-100



DPC-100/ DPH-100

Single-axis type digital pressure sensor with optional dual 3-color display

Features

■ Automatic sensor head recognition

The controller automatically recognizes sensor heads when they are connected, even if their rated pressure ranges are different.

■ Dual display and direct setting

The dual display allows you to check current and threshold values simultaneously.


To facilitate setting operations, three modes have been devised:

- › “RUN mode” is for operation settings that are carried out daily
- › “MENU SETTING mode” for basic settings
- › “PRO mode” for special and detailed settings

Controllers can be connected to a master controller one by one, and the master can transmit settings to the slave controllers. This significantly reduces time required when you need to make multiple, identical settings, or during production changeovers. Moreover, it reduces the possibility for error in such cases.

■ Direct installation using a hexagonal wrench

The sensor head is tightened with a hexagonal wrench, making installation easy, especially in tight spaces.

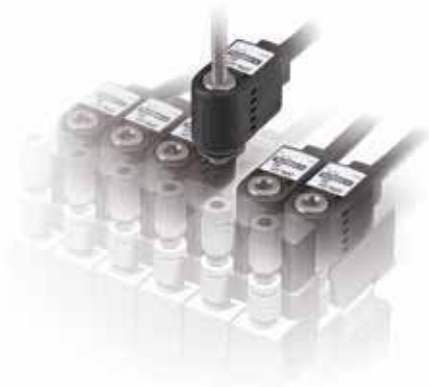

Typical applications


Leak test



Reference pressure checking



Monitoring vacuum pressure



Technical specifications

Sensor heads

Type	Standard ±1bar (±100kPa)			Positive pressure ±1bar (±1.0MPa)		Vacuum pressure -1bar (-100kPa)		
Model no.	DPH-101	DPH-101-M3	DPH-101-M5	DPH-102	DPH-102-M5	DPH-103	DPH-103-M3	DPH-103-M5
Type of pressure	Gauge pressure (note 1)							
Rated pressure	-1 to +1bar (-100.0 to +100.0kPa)			0 to 10bar (0 to +1.0MPa)		0 to -1bar (0 to -100.0kPa)		
Pressure resistance	5bar (500kPa)			15bar (1.5MPa)		5bar (500kPa)		
Applicable fluid	Air, non-corrosive gas							
Power supply	12 to 24VDC ±10%							
Analog voltage output	Output voltage: 1 to 5V (overrated pressure range)							
Protection	IP40 (IEC)							
Ambient temperature	0 to +50°C							
Pressure port	DPH-10□ : R1/8 male thread + M5 female thread, DPH-10□-M3 : M3 male thread (for installing gasket) DPH-10□-M5 : M5 male thread (for installing gasket)							
Rated current consumption (without load)	Max. 15mA							
Material	Front case: PBT, Rear case: PBT (glass fiber reinforced), Pressure port: stainless steel (SUS303), O-ring: NBR, Pressure element silicon diaphragm, PPS							
Connection method	Cable, 2m with attached connector							
Dimensions (HxWxD)	23x13.2x 23.4mm	17x10x 20.5mm	17.5x10x 20.5mm	23x13.2x 23.4mm	17.5x10x 20.5mm	23x13.2x 23.4mm	17x10x 20.5mm	17.5x 10x 20.5mm
Accessories	Connector (e-CON): 1 pc.							

Controller

Type	NPN output	PNP output
Model no.	DPC-101	DPC-101-P
Applicable sensor head	DPH-101□, DPH-102□, DPH-103□	
Rated pressure	Compound pressure type: -1 to +1bar (-100.0 to +100.0kPa) Positive pressure: 0 to 10bar (0 to +1.0MPa) Vacuum pressure: 0 to -1bar (0 to -100.0kPa)	
Power supply	12 to 24VDC ±10%	
Output	PNP or NPN open-collector transistor, max. 100mA	
Power consumption	Normal operation: max. 960mW (Current consumption max. 40mA at 24V supply voltage) ECO mode (STD): max. 720mW (Current consumption max. 30mA at 24V supply voltage) ECO mode (FULL): max. 600mW (Current consumption max. 25mA at 24V supply voltage) Excluding the current consumption of sensor head and analog output current	
Ambient temperature	-10 to +50°C	
Material	Enclosure: PBT (glass fiber reinforced), LCD display: Acrylic, Threaded part: Brass (nickel plated) Switch part: Silicon rubber	
Protection	IP40 (IEC)	
Connection method	Connector (note 2)	
Dimensions (HxWxD)	30x30x29.2mm	
Accessories	CN-66A-C2 Cable (2m) with attached connector Pressure unit label: 1 set	

Notes:

- Reference pressure 1atm
- CN-66A-C2** cable 2m is included in delivery

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

DPC-100/
DPH-100



DPC-L100 / DPH-L100

Powerful and simple high-precision detection of fluid and air pressure

Features

■ Head-separated sensor



The sensor head is very flexible and can be used with or without the control unit. High-precision measuring is possible with an analog current output of 1 to 5V and extremely accurate detection of 1% F.S.

■ Stainless steel construction

The enclosure is made of stainless steel and hence suitable in a wide range of applications. An oil-less, hermetically enclosed diaphragm prevents the fluids from being polluted. An integrated throttle controls the pressure and prevents damage by excess pressure.

■ Wide pressure ranges

Various sensor heads for different pressure ranges from vacuum pressure to positive pressure (up to 500bar/50MPa) are available. With the control unit, the pressure range can be output linearly as voltage or current.

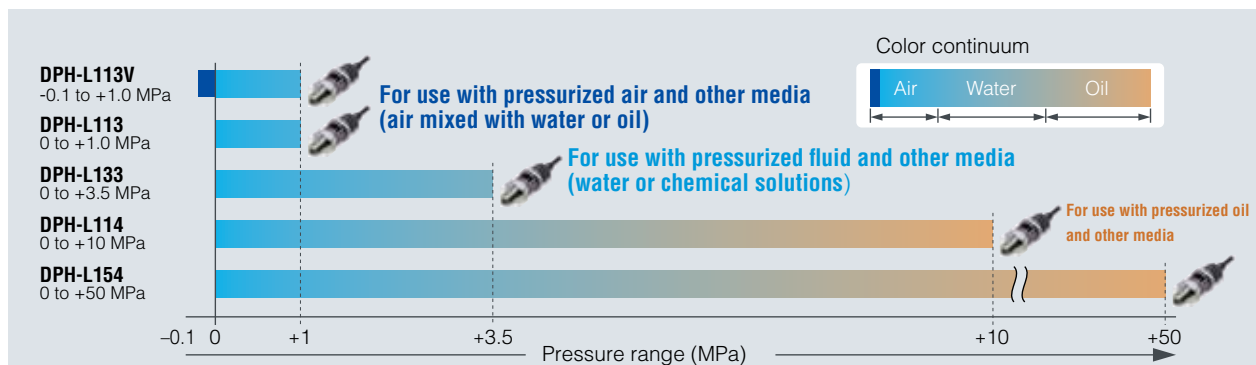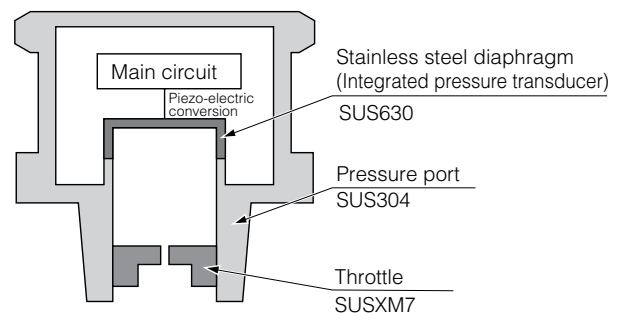

Typical applications

Transport of glass sheets after washing (pressurized air containing water droplets)



Management of plastic filling machine pressure (pressurized fluid)



Management of press pressure (pressurized oil)



Technical specifications

■ Sensor heads

Type	Compound pressure type		Positive pressure		
	DPH-L113V	DPH-L113	DPH-L133	DPH-L114	DPH-L154
Model no.	DPH-L113V	DPH-L113	DPH-L133	DPH-L114	DPH-L154
Rated pressure	-1 to +10bar (-0.1 to +1.0MPa)	0 to +10bar (0 to +1.0MPa)	0 to +35bar (0 to +3.5MPa)	0 to +100bar (0 to +10.0MPa)	0 to +500bar (0 to +50.0MPa)
Applicable fluid	Gases and fluids that do not corrode SUS630, SUS304, or SUSXM7				
Power supply	9 to 36VDC				
Analog voltage output	1 to 5VDC overrated pressure range, Accuracy (note): $\pm 1\%$ F.S. (at $23\pm 2^\circ\text{C}$)				
Response time	Max. 1ms				
Medium temperature range	-20 to +70°C			-20 to +125°C	
Pressure port	R1/4 male thread ((throttle embedded)				
Protection	IP67 (IEC)				
Ambient temperature	-20 to +70°C			-20 to +80°C	
Material	Diaphragm: stainless steel (SUS630); mounting threaded part: stainless steel (SUS304), Throttle: Stainless steel (SUSXM7)				
Connection method	Cable with connector enclosed, 2m				
Dimensions (ØxD)	24.3x73mm				
Accessories	e- CON connector 1pc.				

Note: Accuracy including linearity, hysteresis and repeatability

■ Controller

Type	NPN output	DPC-L101			
Model no.	PNP output	DPC-L101P			
Applicable sensor head	DPH-L113V	DPH-L113	DPH-L133	DPH-L114	DPH-L154
Rated pressure	-1 to +10bar (-0.1 to +1.0MPa)	0 to +10bar (0 to +1.0MPa)	0 to +35bar (0 to +3.5MPa)	0 to +100bar (0 to +10.0MPa)	0 to +500bar (0 to +50.0MPa)
Power supply	12 to 24VDC $\pm 10\%$				
Output	2 PNP or NPN open-collector transistors, max. 50mA				
Analog voltage output	Output voltage 1 to 5V Zero point: within $1V \pm 5\%$ F.S. (note 1) Span: $4V \pm 0.5\%$ F.S. Linearity: within $\pm 0.1\%$ F.S. Output impedance: approx. $1k\Omega$		Output current: 4 to 20mA Zero point: within $4mA \pm 1.0\%$ F.S. (note 2) Span: $16mA \pm 1.5\%$ F.S. Linearity: within $\pm 0.1\%$ F.S. Load resistance: max. $250k\Omega$		
Response time	5ms, 10ms, 25ms, 50ms, 100ms, 250ms, 500ms, 1000ms, 5000ms selectable by key operation				
Protection	IP40 (IEC)				
Ambient temperature	-10 to +50°C				
Material	Enclosure: PBT, LCD display: acrylic; Mounting threaded part: brass (nickel plated), Switch part: silicone rubber				
Connection method	Connector				
Dimensions (HxWxD)	30x30x25.5mm				
Accessories	CN-66A-C2 Cable, 2m with connector attached, Pressure unit label: 1 set				

Notes:

DPH-L113V: Zeropoint within $1.364V \pm 0.5\%$ F.S.
DPH-L113V: Zeropoint within $5.455mA \pm 1.0\%$ F.S.

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

DPC-L100/DPH-L100

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors


Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

FM-200

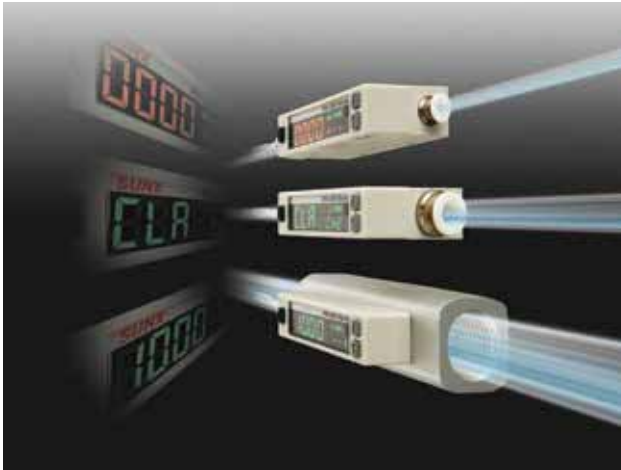

FM-200

Flow sensor with dual display

Features

■ Easy-to-read, 2-color display with sub display

The 2-color digital display lets you check the operation status of the **FM-200** at a glance. The use of color makes it easy to distinguish between measurement values and functionality.

■ High precision of $\pm 3\%$ F.S.

Micro Electro Mechanical System (MEMS) technology allows the sensor to be mounted on a silicon sensor chip. The advantages are as follows: an extremely small heat capacity, a high precision of $\pm 3\%$ F.S., and a high-speed response time. Two temperature sensors, one on either side of the heater, detect heat distribution and make bidirectional detection possible.

■ One sensor for both intake and exhaust

A single sensor can detect flows bidirectionally, or the forward or reverse direction only, making it suitable for a variety of applications.

■ Analog voltage output

1 to 5V analog voltage output is incorporated.

■ Integrated output and pulse output mode incorporated

The FM-200 series can control and manage flows for a wide variety of applications. The integrated output mode will turn the output ON or OFF at the specified integrated value, allowing you to control air blowing volumes, for example. In pulse output mode, a pulse is generated once at each specified integrated value, allowing you to monitor the amount of air consumed, for example with an ECO-POWER METER.

■ Integrated value reset function

In integrated mode, values accumulate over time. As soon as the limit is reached, the digital output is set. This limit value can also be reset by an external input.

■ Rattle prevention function


To prevent rattling from rapid changes in flow or from noise, the response time can be set to one of seven steps, from 50ms to approximately 1500ms. The display update period can be changed to 250ms, 500ms or 1000ms in order to eliminate flickering.

■ ECO mode

In ECO mode, the backlight is turned off after approximately one minute if no operation occurs to reduce power consumption.

Typical applications

Checking suction



Checking seating



Monitoring air blowing and purge gas



Technical specifications

Type		Plastic housing					
Model no.	PNP output	FM-252-4-P	FM-213-4-P	FM-253-4-P	FM-214-4-P	FM-254-8-P	FM-215-8-P
	NPN output	FM-252-4	FM-213-4	FM-253-4	FM-214-4	FM-254-8	FM-215-8
Full scale flow rate		500ml/min	1.0l/min	5l/min	10l/min	50l/min	100l/min
Display range		±9999999ml		±99999.99l		±999999.9l	
Setting and display resolution		1ml/min		0.01l/min		0.1l/min	
Rated pressure		-0.9 to +7bar (-0.09 to +0.7MPa)					
Pressure resistance		10bar (1.0MPa)					
Applicable fluid		Clean air, compressed air, nitrogen gas					
Linearity		3%F.S.					
Response time		50ms to 1.5s selectable					
Power supply		12 to 24VDC ±10%					
Output		PNP or NPN open-collector transistor, max. 50mA					
Output modes		Output OFF mode, window comparator mode, hysteresis mode, integrated output mode, integrated pulse output mode					
Analog voltage output		1.0 to 5.0V					
Rated current consumption (without load)		Normal mode: max. 60mA, ECO mode: max. 40mA					
Protection		IP40 (IEC)					
Ambient temperature		0 to +50°C					
Material		Plastic					
Connection method		Cable with connector enclosed, 1m					
Dimensions (HxWxD)		37x55x17mm				43x55x17mm	
Temperature characteristics		Within ±0.2% F.S./°C (+15°C to +35°C)					
Port size		ø4 push-in				ø8 push-in	

Type		Aluminum housing			
Model no.	PNP output	FM-255-AR2-P	FM-255-AG2-P	FM-216-AR2-P	FM-216-AG2-P
	NPN output	FM-255-AR2	-	FM-216-AR2	-
Full scale flow rate		500l/min		1000l/min	
Display range		±999999.9l			
Setting and display resolution		1l/min			
Rated pressure		-0.9 to +7bar (-0.09 to +0.7MPa)			
Pressure resistance		10bar (1.0MPa)			
Applicable fluid		Clean air, compressed air, nitrogen gas			
Linearity		3%F.S.			
Response time		50ms to 1.5s selectable			
Power supply		12 to 24VDC ±10%			
Output		PNP or NPN open-collector transistor, max. 50mA			
Output modes		Output OFF mode, window comparator mode, hysteresis mode, integrated output mode, integrated pulse output mode			
Analog voltage output		1.0 to 5.0V			
Rated current consumption (without load)		Normal mode: max. 60mA, ECO mode: max. 40mA			
Protection		IP40 (IEC)			
Ambient temperature		0 to +50°C			
Material		Resin/Aluminum body type			
Connection method		Cable with connector enclosed, 1m			
Dimensions (HxWxD)		50x80x30mm			
Temperature characteristics		Within ±0.2% F.S./°C (+15°C to +35°C)			
Port size		Rc½ female thread	G½ female thread	Rc½ female thread	G½ female thread
Accessories		CN-F15-C1 cable, 1m with attached connector			

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

FM-200



GX-M

Cylindrical inductive sensors

Features

■ 2- and 3-wire types

The **GX-M** series consists of 2- and 3-wire types. The 3-wire type is available as a shielded or non-shielded type. The 2-wire type is available as a shielded type and long-range type (up to 15mm). Reduced wiring efforts and space-saving installation reduce costs.

■ Various cylinder and thread types

M8, M12, M18 and M30 types means the GX-M series can be used to solve a wide range of automation task. Space-saving, case-by-case integration in production lines, testing and manual work stations.

■ Several connection possibilities


You can connect the GX-M sensor with either a 2m cable or M12 plug-in connector.

■ Special applications


IP69K (DIN) and IP68 (IEC) types are also available, e.g. for use in machine systems, i.e. the food processing machinery.

Typical applications


Control drilling depth




Detect how far press lowers



Count parts



Control position of components



Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

GX-M

Technical specifications

3-wire type

Type	Shielded				Unshielded			
	GX-M8 (-A/-B)(-P)(-Z) (note 1,2,3)	GX-M12 (-A/-B)(-P)(-Z)	GX-M18 (-A/-B)(-P)(-Z)	GX-M30 (-A/-B)(-P)(-Z)	GX-MK12 (-A/-B)(-P)(-Z)	GX-MK18 (-A/-B)(-P)(-Z)	GX-MK30 (-A/-B)(-P)(-Z)	
Rated sensing distance (note 4)	1.5mm ±10%	2mm ±10%	5mm ±10%	10mm ±10%	7mm ±10%	12mm ±10%	22mm ±10%	
Stable sensing distance (note 5)	0 to 1.2mm	0 to 1.6mm	0 to 4mm	0 to 8mm	0 to 5.6mm	0 to 9.6mm	0 to 17.6mm	
Standard sensing object (note 6)	8x8mm	12x12mm	18x18mm	30x30mm	24x24mm	24x24mm	45x45mm	
Hysteresis	Max. 15% of measurement distance							
Repeatability	Along sensing axis: max. 5% of measurement distance							
Power supply	12 to 24VDC ±10%							
Output	Open collector transistor max. 200mA (note 2)							
Output operation	Normally closed (N.C.) or Normally open (N.O.) (note 1)							
Switching frequency	5kHz	5kHz	2kHz	1kHz	2.5kHz	1kHz	0.5kHz	
Protection	IP67 (IEC)	IP69K (DIN), IP68 (IEC) 2m cable type; IP67 (IEC) M12 connector type						
Ambient temperature	-25 to +70°C							
Material	Enclosure: Brass (nickel plated), Sensing part: PPS (polyphenylsulfide)							
Connection method	Cable, 2m or M12 plug-in connector type (note 3)							
Dimensions (ØxL)	2m cable	M8x33mm	M12x35mm	M18x39mm	M30x43mm	M12x55mm	M18x60mm	M30x63mm
	M12 connector	M8x45mm	M12x50mm	M18x50mm	M30x55mm	M12x66mm	M18x72mm	M30x74mm
Accessories	Nuts 2 pcs.							

Notes:

- 1.) Suffix-A = Normally open type, suffix B= Normally closed type; i.e. **GX-M8B**
- 2.) Suffix-P = PNP type, without suffix = NPN type; i.e. **GX-M8B**
- 3.) Without suffix = 2m cable, suffix -Z = M12 connector type; i.e. **GX-M8B-P-Z**
- 4.) The specified rated sensing distance refers to the standard sensing object
- 5.) The specified stable sensing distance is the range in which the sensor works reliably even in case of deviations in temperature or voltage
- 6.) Standard sensing object = sheet steel, thickness: 1mm

2-wire type

Type	Shielded								
	Standard sensing distance				Large sensing distance				
Model no.	GX-M8(-A/-B)-U (note 1, 2)	GX-M12(-A/-B)-U (-Z)	GX-M18(-A/-B)-U (-Z)	GX-M30(-A/-B)-U (-Z)	GX-ML8(-A/-B)-U	GX-ML12(-A/-B)-U (-Z)	GX-ML18(-A/-B)-U (-Z)	GX-ML30 (-A/-B)-U (-Z)	
Rated sensing distance (note 3)	1.5mm ±10%	2mm ±10%	5mm ±10%	10mm ±10%	2.5mm ±10%	4mm ±10%	8mm ±10%	15mm ±10%	
Stable sensing distance (note 4)	0 to 1.2mm	0 to 1.6mm	0 to 4mm	0 to 8mm	0 to 2mm	0 to 3.2mm	0 to 6.4mm	0 to 12mm	
Standard sensing object (note 5)	8x8mm	12x12mm	18x18mm	30x30mm	8x8mm	12x12mm	18x18mm	30x30mm	
Hysteresis	Max. 15% of measurement distance								
Repeatability	Along sensing axis: max. 5% of measurement distance								
Power supply	12 to 24VDC ±10%								
Output	Non-contact DC 2-wire type, sink current 1.5 to 100mA, residual voltage max 4.2V (note 6)								
Output operation	Normally closed (N.C.) or Normally open (N.O.) (note 1)								
Switching frequency	1kHz	1kHz	1.2kHz	1.3kHz	1.1kHz	1.3kHz	1.5kHz	0.8kHz	
Protection	IP67 (IEC)	IP69K (DIN), IP68 (IEC) 2m cable type; IP67 (IEC) M12 connector type							
Ambient temperature	- 25 to +70°C								
Material	Enclosure: Brass (nickel plated), Sensing part: PPS (polyphenylsulfide)								
Connection method	Cable, 2m	Cable, 2m or M12 plug-in connector type (note 2)			Cable, 2m	Cable, 2m or M12 plug-in connector type (note 2)			
Dimensions (ØxL)	2m cable	M8x33mm	M12x35mm	M18x39mm	M30x43mm	M8x33mm	M12x35mm	M18x39mm	M30x43mm
	M12 connector	-	M12x50mm	M18x50mm	M30x55mm	-	M12x50mm	M18x50mm	M30x55mm
Accessories	Nuts 2 pcs.								

Notes:

- 1.) Suffix-A = Normally open type, suffix B= Normally closed type; i.e. **GX-M8B-U**
- 2.) Without suffix = 2m cable, suffix -Z = M12 connector type; i.e. **GX-M8B-P-Z**
- 3.) The specified rated sensing distance refers to the standard sensing object
- 4.) The specified stable sensing distance is the range in which the sensor works reliably even in case of temperature or voltage deviations
- 5.) Standard sensing object = sheet steel, thickness: 1mm
- 6.) If you extend the cable residual voltage may rise

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

GX-M



GX-F/H

Stable sensing of work pieces

Features

■ Environmental resistance

This sensor has a long stable sensing range. It is easy to install.

- › IP68g protection: water and oil-resistant
- › Space-saving installation
- › A metal sleeve ensures a secure installation

The new, integrated construction method improves environmental resistance performance.

■ The LED indicators are easy to see

A prism with a wide field of view has been developed, thereby greatly improving the visibility of the operation indicators.

■ Stable detection

- › Large sensing range
- › Max. deviation at max. sensing range: $\pm 8\%$
- › Max. deviation with temperature changes: $\pm 8\%$

Typical applications

Checking up/down operation of compact molding equipment




Shock resistance: 5000G

Sensing presence of metallic objects on a part feeder



Vibration resistance: 500Hz

Positioning metal pallets



Muting control with light curtains



Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

GX-F/H

Technical specifications

Model no.	Side sensing	GX-F6 (-A/-B)(-I)(-P) (note 1,2,3)	GX-F8 (-A/-B)(-I)(-P)	GX-F12 (-A/-B)(-I)(-P)	GX-F15(-A/-B)(-I)(-P)	GX-FL15 (-A/-B)(-I)(-P)
	Top sensing	GX-H6 (-A/-B)(-I)(-P)	GX-H8 (-A/-B)(-I)(-P)	GX-H12 (-A/-B)(-I)(-P)	GX-H15 (-A/-B)(-I)(-P)	GX-HL15 (-A/-B)(-I)(-P)
Max. operating distance (note 4)		1.6mm ±8%	2.5mm ±8%	4mm ±8%	5mm ±8%	8mm ±8%
Stable sensing distance (note 5)		0 to 1.3mm	0 to 2.1mm	0 to 3.3mm	0 to 4.2mm	0 to 6.7mm
Standard sensing object (note 6)		12x12mm	15x15mm	20x20mm	20x20mm	30x30mm
Repeatability	Min. 0.04mm					
Interference prevention	Alternate frequency (note 2)					
Power supply	12 to 24V DC +10% / -15%					
Output	PNP / NPN open-collector transistor, 100mA (note 3)					
Output operation	Normally closed (NC) or Normally open (NO) (note 1)					
Switching frequency	400Hz	500Hz		250Hz	150Hz	
Protection	IP68 (IEC)					
Ambient temperature	-25 to +70°C					
Material	Enclosure: PBT, display: polyester					
Connection method	Cable, 1m					
Dimensions (HxWxD)	Side sensing	6x6x24.5mm	7.4x8x23mm	7.1x12x27.8mm	8x15x31.5mm	
	Top sensing	6x6x25mm	8.2x8x25mm	12x12x27.4mm	16.5x15x29.5mm	

Notes:

- 1.) Suffix-A = Normally open type, suffix B= Normally closed type; i.e. **GX-F6B**
- 2.) Suffix-I = Alternate frequency type (interference prevention) i.e. **GX-F6BI**
- 3.) Without suffix = NPN type, P = PNP type; i.e. **GX-F6BI-P**
- 4.) The specified rated sensing distance refers to the standard sensing object
- 5.) The specified stable sensing distance is the range in which the sensor works reliably even in case of temperature or voltage deviations
- 6.) Standard sensing object = sheet steel, thickness: 1mm

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

GX-F/H

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

HG-S



HG-S


Slim and robust contact
measurement sensor

Features

■ Resistance to lateral load


The two plain bearings are accurately aligned with the center of the spindle during their installation to the top and bottom sections of the body to ensure smooth sliding. The sensor can withstand more than 100 million sliding operations under application of lateral load (reference value). The two plain bearings increase the resistance to mechanical stress from the side and ensure the accuracy of measuring results even under lateral load.

F = Force

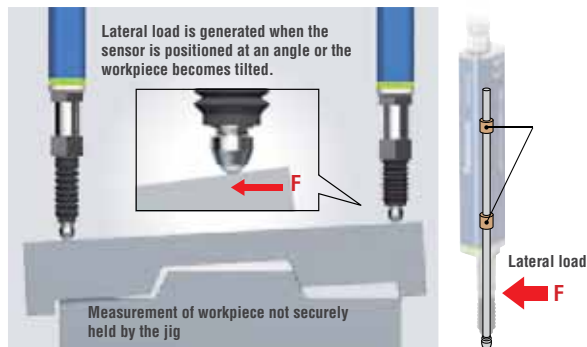

■ Spindle stopper against damage

Even when a sudden upward thrust impact occurs, the resulting load is applied only to the lower section of the sensor unit because a spindle stopper minimizes the impact on the glass scales. Additionally an alarm can be set to notify the user of an upward thrust (stroke) that exceeds the set level. This allows you to conduct a preventive maintenance before the sensor head generates a malfunction.

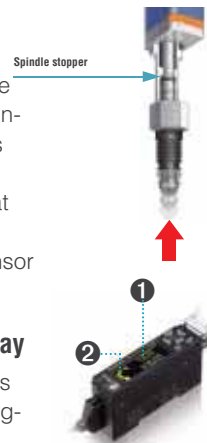

- 1.) Dual display for more flexibility
- 2.) Copy function from master to slave units

■ Easy-to-understand 2-line digital display

The 2-line digital display simultaneously shows head measurement (measured value) and judgment value (calculated value). The high-contrast LCD provides sharp and clear indications and offers a wide viewing angle. Secondary display line: Displays sensor head measurement and other data. Main display line: displays judgment value.

■ Serial connection of up to 15 slave units

One master unit can be connected in series with up to 15 slave units in any order. This allows easy multi-point calculations. End plates (optional) must be mounted on both sides of the controller after the connection of slave units.



Typical applications


Coupling assembly inspection



Transmission parts height measurement



Flat screen flatness measurement



Technical specifications

■ Sensor head

Type	General purpose			High precision	
	Standard type	Low measuring force type		Standard type	Low measuring force type
Model no.	HG-S1010	HG-S1010R		HG-S1110	HG-S1110R
Measurement range	10mm (note 1)				
Measuring force (note 2, note 3)	Downward mount	Max. 1.65N, 1.1N (note 4)	Max. 0.35N, 0.3N (note 4)	Max. 1.65N, 1.1N (note 4)	Max. 0.35N, 0.3N (note 4)
	Upward mount	Max. 1.35N, 0.85N (note 4)	Max. 0.12N, 0.05N (note 4)	Max. 1.35N, 0.85N (note 4)	Max. 0.12N, 0.05N (note 4)
	Side mount	Max. 1.5 N, 0.95N (note 4)	Max. 0.25N, 0.2N (note 4)	Max. 1.5 N, 0.95N (note 4)	Max. 0.25N, 0.2N (note 4)
Resolution	0.5µm			0.1µm	
Accuracy	Full range: max. 2.0µm Narrow range: max. 1.0µm (any 60µm)			Full range: max. 1.0µm Narrow range: max. 0.5µm (any 60µm)	
Protection	IP67 (IEC, note 5)				
Ambient temperatur	-10 to +55°C				
Material	Body: zinc, holder: stainless steel; spindle: tool steel; probe (note 6): ceramic; rubber bellows: NBR (black)				
Connection method	Connector (note 7)				
Dimensions (HxWxD)	135.5x11x18mm				
Accessories	Standard type (HG-S1010 / HG-S1110): Sensor head fastening wrench 1 pc., mounting nut 1 pc. Low measuring force type (HG-S1010R / HG-S1110R): Sensor head fastening wrench 1 pc., mounting nut 1 pc., rubber bellows 1 pc.				

Notes:

- 1.) 5 to 10mm range when low measurement force type (HG-S1010R / HG-S1110R) is mounted in upward mount
- 2.) Measured at an ambient temperature of +20°C
- 3.) In the case of low measuring force type (HG-S1010R / HG-S1110R), measurements were obtained with products in standard configuration without rubber bellows
- 4.) Typical value near center of measurement
- 5.) Excludes damage and deterioration to rubber bellows due to external causes
- 6.) Different probes (optional) are also available
- 7.) Please order sensor head connection cable separately

■ Controller

Type	Master unit		Slave unit	
		High-performance type		Standard type
Model no.	NPN output	HG-SC101	HG-SC111	HG-SC112
	PNP output	HG-SC101-P	HG-SC111-P	HG-SC112-P
Supply voltage	24V DC ±10% (note1)			
Current consumption (note 2)	Max. 70mA when sensor head is connected			
Response time	3ms, 5ms, 10ms, 100ms, 500ms, 1000ms switching type			
Control output	NPN or PNP open collector transistor, max. 50 mA			
Analog output (note 3)	4-20mA			
Protection	IP40 (IEC)			
Ambient temperature	-10 to +50°C			
Dimension (HxWxD)	43.1x86x21.1mm			
Material	Case: Polycarbonate, Cover: Polycarbonate, Switches: Polyacetal			
Connection method	Cable, 2m			

Notes:

- 1.) Where measurement conditions have not been specified precisely, the conditions used were as follows: supply voltage 24 V DC, ambient temperature +20°C
- 2.) Current consumption does not include analog current output
- 3.) Linearity F.S. = 16 mA, and is linearity with respect to digitally measured values

■ Sensor head connection cable

Type	Straight connector			L-shaped connector		
	CN-HS-C3	CN-HS-C7	CN-HS-C7	CN-HS-C3L	CN-HS-C7L	CN-HS-C20L
Model no.						
						
Length	3m	7m	20m	3m	7m	20m

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

HG-S

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index



HG-C

Reliable detection with
repeatability of 10 μ m

Features


■ Equipped with 0-5V analog output

The sensor not only indicates measured values in mm, but also outputs analog voltage. The data can be used for various calculations and storage (logging) when the output is sent to a PLC + analog unit.


■ Configurable external input

The external input can be configured to perform one of four functions: "zero set", "teaching", "emission stop" and "selecting trigger function".


■ Teaching & window comparator mode

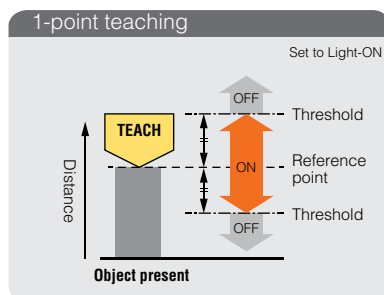

Perform 1-point teaching and the threshold range is set for the distance from the reference surface of the object to be detected.

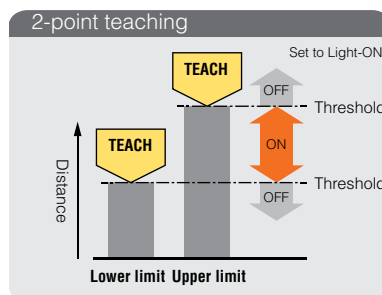

Press TEACH once for the lower (first point) and once for the upper limit (second point). This is useful for detecting objects at different distances.

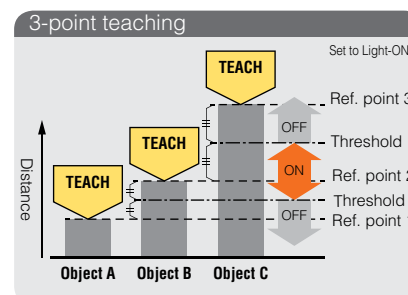

This is the method to set the threshold range by conducting the teaching at 3 points (detecting object A, B and C). After teaching, the reference points are automatically sorted in ascending order (reference point 1, 2 and 3). The thresholds are set at the midpoints between reference point 1 and 2, and 2 and 3, respectively. This is useful for detecting objects at different distances.

Typical applications


Measuring the hoop slack



Checking for presence of O ring



Controlling the height of a robot



Controlling the dispenser head height



Technical specifications

Measurement center type	30mm	50mm	100mm	200mm	400mm
NPN output	HG-C1030	HG-C1050	HG-C1100	HG-C1200	HG-C1400
PNP output	HG-C1030-P	HG-C1050-P	HG-C1100-P	HG-C1200-P	HG-C1400-P
Applicable standards	Conforming to EMC Directive and FDA Standard				
Sensing range	30±5mm	50±15mm	100±35mm	200mm ±80mm	400mm ±200mm
Repeatability	10µm	30µm	70µm	200µm	300µm (200-400mm) 800µm (400-600mm)
Linearity	±0.1% F.S.			±0.2% F.S.	±0.2% F.S. (200-400mm) ±0.3% F.S. (400-600mm)
Beam diameter	Approx. 50µm	Approx. 70µm	Approx. 120µm	Approx. 300µm	Approx. 500µm
Supply voltage	12 to 24V DC ±10%				
Control output	PNP or NPN open-collector transistor				
Output operation	Either Light-ON or Dark-ON				
Short circuit protection	Incorporated (auto-reset)				
Analog output	Voltage output: 0 to 5V (at alarm: +5.2V) Output impedance: 100Ω				
Response time	Switchable between high speed (1.5ms), standard (5ms), and high precision (10ms)				
Degree of protection	IP67 (IEC)				
Ambient temperature	-10 to +45°C (no dew condensation or icing allowed), storage: -20 to +60°C				
Ambient humidity	35 to 85% RH, at storage: 35 to 85% RH				
Ambient illumination	3000lx max. (Illumination level of light receiving surface under incandescent light)				
Cable	5-core cable, 2m				
Material	Enclosure: die-cast aluminum, front cover: acrylic				
Dimensions (HxWxD)	44x20x25mm				

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

HG-C

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

HL-G1



HL-G1

Precision laser displacement
sensors

Features

All-In-One Concept

All processing electronics are incorporated in a robust sensor housing. All settings can be made directly on the sensor. A 7-segment LED-display makes it easy to configure sensor operation while checking displacement values.

Compact and lightweight body

With its lightweight plastic body, weighing just 70g and dimensions of 20.4 x 60 x 57mm, it is easy to integrate the sensor in machines and production lines where space is tight.

Extended product range

With the extension of the HL-G1 series it is now possible to measure on specular surfaces with a high accuracy. Models with different measurement distances up to 82mm are available. Suitable applications can be for example in the semiconductor industry with specular wafer surfaces or other polished metal parts.


User-friendly

The **HL-G1** series can be operated directly, by touch terminal (GT02/GT12 series) or Windows software via RS-422/RS-485.




Typical applications


Control of dispenser height



Detection of aluminum wheel grooves



Measuring sheet slack and thickness



Measuring the eccentricity of a metal shaft



Technical specifications

Standard type

Type	Diffuse reflective type					Specular reflective type		
Model no.	HL-G103-A-C5	HL-G105-A-C5	HL-G108-A-C5	HL-G112-A-C5	HL-G125-A-C5	HL-G103-RA-C5	HL-G105-RA-C5	HL-G-RA-C5
Sensing range	30±4mm	50±10mm	85±20mm	120±60mm	250±150mm	26.3±2mm	47.3±5mm	82.9±10mm
Emission spot size	0.1x0.1mm	0.5x1mm	0.75x1.25mm	1.0x1.5mm	1.75x3.5mm	0.1x0.1mm		0.2x0.2mm
Power supply	24V DC ±10%							
Analog voltage output	0 to 10V / 4 to 20mA							
Response time	200µs, 500µs, 1ms, 2ms (selectable)							
Resolution	0.5µm	1.5µm	2.5µm	8µm	20µm	0.5µm	1.5µm	2.5µm
Linearity	±0.1%F.S.				±0.3%F.S.	±0.2%F.S.		
Emitting element	Red laser diode, 655nm (class 2)							
Output	PNP or NPN open-collector transistor, max. 50mA (selection by wiring)							
Protection	IP67 (IEC)							
Ambient temperature	-10 to +45°C							
Material	Enclosure: PBT / Front cover: Acrylic / Cable: PVC							
Connection method	Cable, 5m							
Dimensions (HxWxD)	60x20.4x57mm							
Accessories	Warning label (English): 1 set							

Multifunction type

Type	Diffuse reflective type					Specular reflective type		
Model no.	HL-G103-S-J	HL-G105-S-J	HL-G108-S-J	HL-G112-S-J	HL-G125-S-J	HL-G103-RS-J	HL-G105-RS-J	HL-G108-RS-J
Sensing range	30±4mm	50±10mm	85±20mm	120±60mm	250±150mm	26.3±2mm	47.3±5mm	82.9±10mm
Emission spot size	0.1x0.1mm	0.5x1mm	0.75x1.25mm	1.0x1.5mm	1.75x3.5mm	0.1x0.1mm		0.2x0.2mm
Power supply	24V DC ±10%							
Analog voltage output	0 to 10V / 4 to 20mA							
Interfaces	RS-485 / RS-422							
Response time	200µs, 500µs, 1ms, 2ms (selectable)							
Resolution	0.5µm	1.5µm	2.5µm	8µm	20µm	0.5µm	1.5µm	2.5µm
Linearity	±0.1%F.S.				±0.3%F.S.	±0.2%F.S.		
Emitting element	Red laser diode, 655nm (class 2)							
Output	PNP or NPN open-collector transistor, max. 50mA (selection by wiring)							
Protection	IP67 (IEC)							
Ambient temperature	-10 to +45°C							
Material	Enclosure: PBT / Front cover: Acrylic / Cable: PVC							
Connection method	Cable with connector, 0.5m (note)							
Dimensions (HxWxD)	60x20.4x57mm							
Accessories	Warning label (English): 1 set							

Note: Cable is not included in delivery. Please select under accessories (page 127)

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

HL-G1

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

HL-C2



HL-C2

Ultra high-speed, precision laser displacement sensors

Features

- **Excellent basic performance**
- **Sampling rate 100kHz**


The HDLC-CMOS sensors were developed especially for the **HL-C2** series. The high-resolution chip together with a very short processing time enables maximum resolution and speed.

- **Resolution up to 0.01 μ m, linearity up to $\pm 0.02\%$ F.S.**

Superior resolution of 0.01 μ m. Linearity of $\pm 0.02\%$ F.S. enabled by latest high resolution lens technology.


- **Compact but with a wide array of functions**

You can connect two sensor heads and a variety of devices to the ultra compact controller. Measurement values can be analyzed and displayed while the sensors are being controlled.



Typical applications

Measurement of the position of patterned glass



Control of the camera focus



Measurement of the shape of a camshaft



Measurement of the heights of chip parts



Specifications

Sensor heads

Measuring range	10±1mm				30±5mm			
Model no.	HL-C201F	HL-C201FE	HL-C201F-MK	HL-C201FE-MK	HL-C203F	HL-C203FE	HL-C203F-MK	HL-C203FE-MK
Type	Small beam spot type		Linear beam spot type		Small beam spot type		Linear beam spot type	
Measuring range	10±1 mm				30±5 mm (direct reflective mode 26.4±4.6mm)			
Resolution	0.01µm	0.25µm	0.01µm	0.25µm	0.025µm	0.25µm	0.025µm	0.25µm
Laser class	Class 1				Class 2			
Beam size	Ø20µm		20x700µm		Ø30µm		30x1200µm	
Linearity	±0.02% F.S.				±0.03% F.S.			
Dimensions (HxWxD)	54x20x95mm				80x26x70mm			

Measuring range:	50±5mm				85±20mm			
Model no.	HL-C205B (HL-C205BE, note 1)	HL-C205B-MK (HL-C205BE-MK, note 1)	HL-C205C (HL-C205CE, note 1)	HL-C205C-MK (HL-C205CE-MK, note 1)	HL-C208B (HL-C208BE, note 1)	HL-C208B-MK (HL-C208BE-MK, note 1)	HL-C208C (HL-C208CE, note 1)	HL-C208C-MK (HL-C208CE-MK, note 1)
Type	Spot type	Linear beam spot type	Spot type	Linear beam spot type	Spot type	Linear beam spot type	Spot type	Linear beam spot type
Measuring range	50±5mm (direct reflective mode 46±5mm) (note 2)				85±20 mm (direct reflective mode 81.4±6mm) (note 2)			
Resolution	0.05µm				0.15µm			
Laser class	Class 2		Class 3R		Class 2		Class 3R	
Beam size	Ø70µm	70x1000µm	Ø70µm	70x1000µm	Ø100µm	100x1200µm	Ø100µm	100x1200µm
Linearity	±0.03% F.S.				±0.03 % F.S. (specular reflective mode ±0.1 % F.S.)			
Dimensions	90x26x74mm							

Measuring range:	110±15mm							
Model no.	HL-C211F	HL-C211FE	HL-C211F5	HL-C211FE5	HL-C211F-MK	HL-C211FE-MK	HL-C211F5-MK	HL-C211FE5-MK
Type	Spot type				Linear beam spot type			
Measuring range	110±15mm (direct reflective mode 106±14.7mm) (note 2)							
Resolution	0.1µm	0.25µm	0.1µm	0.25µm	0.1µm	0.25µm	0.1µm	0.25µm
Laser class	Class 2		Class 3R		Class 2		Class 3R	
Beam size	Ø80µm				Ø80x1700µm			
Linearity	±0.03% F.S.							
Dimensions	90x26x74mm							

Measuring range:	350±200mm	
Model no.	HL-C235CE-W	HL-C235CE-WMK
Type	Spot type	Linear beam spot type
Measuring range	350±200 mm	
Resolution	2µm	
Laser class	Class 3R	
Beam size	Ø400µm	400x6500µm
Linearity	±0.04% F.S. (-200 to 0mm), ±0.08% F.S. (0 to +200mm)	
Dimensions	90x26x74mm	

Notes:

- Models with a minimum resolution of 0.25µm are subject to the Japanese export controls, defined in the "Foreign Exchange and Foreign Trade Act". This is not true for the model nos. in brackets if the laser heads are ordered in combination with a controller (i.e. HL-C2CE)
- If the light reflection in "specular reflective mode" is too high, please use the optional filter (HL-C2F01)

Common technical data

Emitting element	Red laser diode, 658nm
Degree of protection	IP67 (IEC)
Ambient temperature	0 to +45°C
Material	Enclosure: Die-cast aluminum / optical window: glass
Connection method	0.5m cable with attached connector (extension cables, see page 129 (HL-G1CCJ□))

Controllers

Type	RS232C interface				Ethernet interface			
	NPN		PNP		NPN		PNP	
	High resolution		Low resolution		High resolution		Low resolution	
Model no.	HL-C2C	HL-C2C-P	HL-C2CE	HL-C2CE-P	HL-C21C	HL-C21C-P	HL-C21CE	HL-C21CE-P
Supply voltage	24V DC (±10%)							
Analog output	±5V/F.S., 4-20mA F.S.							
Output	NPN or PNP open collector transistor, max 100mA							
Inputs	Timing input, zero set, remote interlock, reset							
USB interface	USB 2.0							
Serial input/output	RS232C (9.6-115.2kbps)							
Current consumption	With 1 sensor head: 350mA With 2 sensor heads: 500mA							
Ambient temperature	0 to +50°C							
Material	Polycarbonate							
Connection method	Connector (sensors), terminal block							
Dimensions (HxWxD)	130x59x105.5mm							

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors


Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

HL-C2

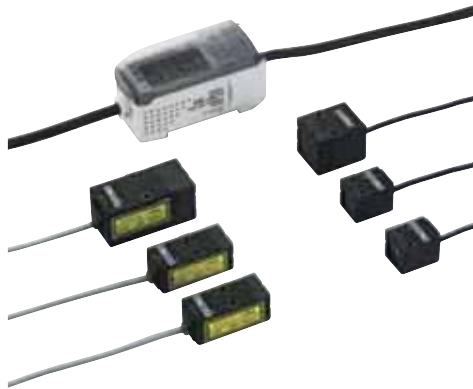

HL-T1

A high-functionality intelligent controller

Features

■ Small sensor head

The most compact size and yet the highest level of performance in their class. These sensors save space.

■ Resolution of 4 μ m


A high resolution of 4 μ m (at an average 64 sampling cycles) allows high-precision positioning and size judgment.

■ High-precision measurement even of minute differences in light intensity

The sensors are sensitive to minute differences in light intensity so that they can judge even the opacity of glass and turbidity of liquids. In addition, the amount of light received can be displayed as a percentage to allow you to determine permeation rates.

■ Calculations for 2 sensors are possible

The calculation unit (optional) just needs to be connected between the two controllers to enable calculations (addition and subtraction) to be carried out for two sensors. No digital panel controller is needed.



Sheet width measurement




Calculation unit
HL-AC1-CL

■ FDA standards conforming types

FDA standards conforming types, most suitable for equipment used in the USA, are now available (FDA: class II, IEC/JIS: class 1).

Typical applications

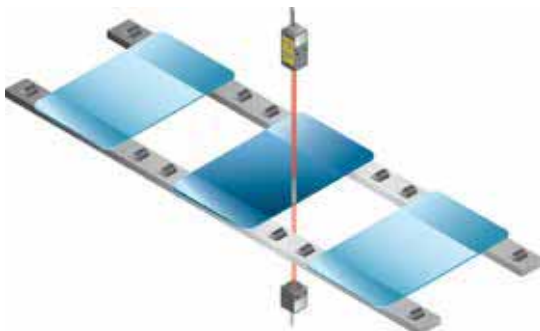

Distinguishing opacity of glass

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers/ Electrostatic Sensors

Accessories

Index

HL-T1

Technical specifications

■ Sensor heads

Type	Beam diameter ϕ 1mm		Sensing width 5mm	Sensing width 10mm
Model no.	HL-T1001A(F) (note)		HL-T1005A(F)	HL-T1010A(F)
Sensing width/Diameter	ϕ 1mm	ϕ 1 to 2.5mm	5mm	10mm
Sensing range	0 to 500mm	500 to 2,000mm	500mm	
Object to be sensed	Min. ϕ 8 μ m (opaque)	Min. ϕ 50 μ m (opaque)	Min. ϕ 0.05mm (opaque)	Min. ϕ 0.1mm (opaque)
Repeatability (during the state in which light is half blocked)	4 μ m	–	4 μ m	
Linear output resolution	4 μ m	–	4 μ m	
Ambient temperature	0 to +50°C			
Emitting element	Infrared semiconductor laser, Class 1 (IEC/JIS)			

Notes:

HL-T10A is a IEC/JIS standards conforming type

HL-T10F is a FDA standards conforming type

■ Controller

Type	NPN	PNP
Model no.	HL-AC1	HL-AC1P
Power supply	12 to 24VDC \pm 10%	
Measuring cycle	150 μ s	
Analog voltage output	Current / voltage output switchable Current output: 4 to 20mA/F.S., max. load resistance 300 Ω Voltage output: \pm 5V, Output impedance 100 Ω	
Temperature characteristics	\pm 0.2% F.S.°C	
Output	3 x NPN or PNP open-collector transistors, max. 50mA	
Ambient temperature	0 to +50°C	
Dimensions (HxWxD)	34.3x30x64.3mm	

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

HL-T1



GP-X

Eddy current analog sensor for high-speed sampling

Features

- Ultra high-speed response time of 25 μ s
- Extremely low temperature deviations (0,07% F.S.°C)
- Predefined material characteristics


The sensor exhibits $\pm 0.3\%$ F.S. linearity deviation when used on iron and stainless steel. Furthermore, characteristics for other materials are already programmed in the controller, making selection easy. Of course, the settings can also be customized.

■ Serial interface

The controller can be connected with a personal computer via an RS-232 interface. GP-XAiME, the software included, simplifies data visualization and analysis. Moreover, several systems can be combined and then easily configured at the same time.


- The 5-digit, dual, 2-color digital display offers great visibility

If the measurement results fall within the setting range (GO), they will appear on the lower digital display in green. If they are out of setting range (HI, LO), they will be displayed in the upper digital display in orange. The display position and color change permit accurate visibility even for momentary changes.

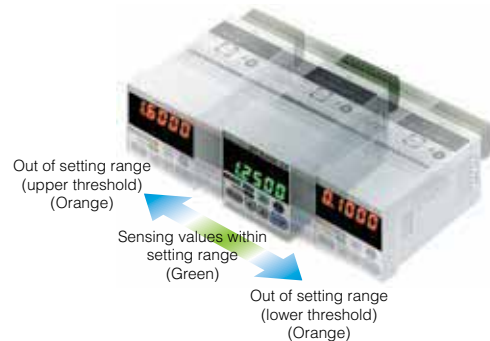

Typical applications

Stroke end sensing



Eccentricity sensing



Height sensing



Technical specifications

Type		Cylindrical heads			Heads with thread		
Model no.	NPN output	GP-XC3SE (note 2)	GP-XC5SE	GP-XC8S	GP-XC10M	GP-XC12ML	GP-XC22KL
	PNP output	GP-XC3SEP	GP-XC5SEP	GP-XC8SP	GP-XC10MP	GP-XC12MLP	GP-XC22KLP
Sensing range		0 to 0.8mm	0 to 1mm	0 to 2mm	0 to 2mm	0 to 5mm	0 to 10mm
Standard sensing object		Stainless steel (SUS304) / Iron sheet, cold rolled carbon steel (SPCC) 60x60x1mm					
Power supply		24VDC ±10%					
Analog voltage output		-5V to +5V (note 1)					
Sampling rate		40kHz (25µs)					
Resolution		GP-XC3SE / GP-XC5SE: 0.04% F.S. (64 times average processing) GP-XC8S / GP-XC10M / GP-XC12ML / GP-XC22KL: 0.02% F.S. (64 times average processing)					
Output		3x NPN or PNP open-collector transistor, max. 100mA					
Protection		Sensor head: IP67 (IEC)					
Ambient temperature		Sensor head: -10 to +55°C, Controller: 0 to +50°C					
Material		Sensor head: stainless steel (SUS303), GP-XC12ML□, GP-XC22KL□: brass (nickel plated), Switch part: PC					
Connection method		Terminal block					
Dimensions	Sensor head (ØxD)	3.8x17mm	5.4x17mm	8x17mm	M10x17mm	M12x21mm	M12x35mm
	Controller (HxWxD)	48x48x83mm					
Accessories		Controller mounting frame, 1 pc.					

Notes:

- 1.) Factory setting: 0 to +5V
- 2.) Model no. for one set (sensor head and controller)

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

GP-X



ER-Q

Miniature ionizer with fan

Features

■ Small dimensions

Simple and space-saving installation on production lines and manual workstations.

■ Adjustable

A continuously variable adjuster ensures the production of the required air volume.

■ Unit for demanding industrial environments

The LED displays the required maintenance steps or failures; this also can be queried via the outputs of a PLC. Parts for maintenance are easy to get at and replace.



Technical specifications

Type	Standard type
Model no.	ER-Q
Charge removal time ($\pm 1000 \rightarrow \pm 100V$)	Approx. 1.5s
Discharge output voltage	$\pm 2kV$
Ion balance	Max. $\pm 10V$
Discharge method	High frequency AC method
Power supply	24V DC $\pm 10\%$
Power consumption	Max. 200mA
Fan rotation speed	Continuously variable adjustable (potentiometer)
Outputs	ERROR and CHECK NPN open-collector transistor, max. 50mA
Status indicator / Monitoring function	Ready/Discharging (DSC/green), Discharge error (red), Fan error (blinking red)
Ambient temperature	0 to $+50^{\circ}C$
Ambient humidity	35 to 65%RH
Material	Enclosure: PBT, Discharge electrode needles: tungsten
Dimensions (HxWxD)	60x33x65mm
Accessories	I/O connector set manufactured by MOLEX, Inc.: Housing 5557-08P, terminal 5556T

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

ER-Q



ER-F

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index

Features


Two types

Low volume fan type. This type generates only the half of the air volume as the standard type, which is required for small components and thin film. Four different speeds can be selected for the fan.


Easy maintenance

Because the discharge electrode needle unit is attached to the louver, exchange or maintenance of the electrode needles is made easy without touching the main unit. A safe design: once the louver is removed, the high-voltage circuit is broken and the fan halts. Simply replace the louver to change configuration between long distance and wide area ionization. The two louvers come with the ionizer main body.

Standard fan type
ER-F12



Low-volume fan type
ER-F12S



Straight louver removes charges at great distances




Neutralizes static charges quickly from a great distance

Angled louver removes charges over wide area



Neutralizes static charges; wide area ionizer

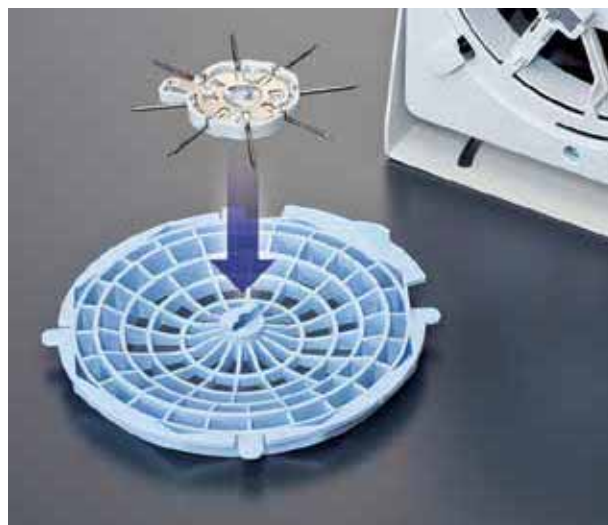

Technical specifications

Type	Standard	Low-volume fan
Model no.	ER-F12	ER-F12S
Discharge time ($\pm 1000 \rightarrow \pm 100V$)	Approx. 1s	Approx. 1.5s
Discharge output voltage	$\pm 2kV$	
Ion balance	Max. $\pm 10V$	
Discharge method	High-frequency AC	
Power supply	24V DC $\pm 10\%$	
Power consumption	Max. 700mA	Max. 400mA
Fan rotation speed	Adjustable at 4 levels	
Output	ERROR, NPN open-collector transistor, max. 50mA	
Input terminal	Discharge stop = connected to 0V / Start = open	
Status indicators / Monitoring functions	Power supply (Power / green), Discharging (DSC / green), Discharge error (DSC red), Fan error (FAN red)	
Ambient temperature	0 to $+50^{\circ}C$	
Ambient humidity	35 to 65%RH	
Material	Enclosure / Louver: ABS, Fitting of discharge electrode needles: PBT, Discharge electrode needles: tungsten, Mounting bracket: DC03	
Dimensions (HxWxD)	166x161x60mm	
Accessories	Straight louver (note): 1 pc. Angle louver: 1 pc.; Caution label: 1 set; Rubber cushion: 1 pc.	

Note: The discharge electrode needle set is mounted at the louver

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

ER-F



ER-X

Area ionizer for fast applications

Features

■ Quick charge removal

Thanks to the pulse AC method, the **ER-X** series is well suited for high-speed applications as found in the packaging and semiconductor industries, where charge removal time is directly linked to productivity. In addition, discharge frequencies can be adjusted from between 1 and 100Hz, maximizing flexibility. Thanks to a built-in feedback system, the ionizer can even adjust the discharge frequency automatically during operation.

■ Feedback system

Individual displays for discharge, error messages and electrode needle control are provided on the controller. Furthermore, you can activate settings for frequency, ion balance or limits directly via a potentiometer and DIP switches.




■ Airless operation

The area ionizer of the ER-X series ionizers can be operated with or without air pressure. This technology opens up applications in fields such as the coating industry, as well as the production and packaging of microelectronic components that otherwise are blown around by whirling air.

■ Flexible system configuration

The system consists of a sensor head and a controller. The sensor head is available in different sizes. You can connect parallel up to 2 heads to the controller. This enlarges the working area of the system up to 1.2m.



Typical applications

Neutralization of foils



Charge removal from ICs



Charge removal from miniaturized electronic components



Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

ER-X

Technical specifications

Sensor heads

	Spot	Area				
Model no.	ER-X001	ER-X008	ER-X016	ER-X032	ER-X048	ER-X064
Effective charge removal width	Spot type	80mm	160mm	320mm	480mm	640mm
Charge removal time ($\pm 1000 \rightarrow \pm 100V$)	Max. 0.5s	Approx. 1s				
Discharge output voltage	±7kV					
Ion balance	Max. ±30V					
Discharge method	Pulse AC method					
Maximum air pressure	5bar (0.5MPa)					
Ambient temperature	0 to +50°C					
Ambient humidity	35 to 65%RH					
Material	Enclosure: PPS, Stainless steel; Mounting bracket, Stainless steel; Electrode needle: tungsten					

Controller

Model no.	ER-XC02
Power supply	24V DC ±10%
Power consumption	1 head: max. 450mA; 2 heads: max. 800mA
Outputs	Alarm, Error; PhotoMOS, max. 50mA
Status display / Monitor functions of discharge unit	Discharge (DSC)
Ambient temperature	0 to +50°C
Ambient humidity	35 to 65%RH
Material	ABS
Dimensions (HxWxD)	90x53x64mm
Accessories	MOLEX-plug (Housing 5557-10R, Terminal 5556TL) 1 pc., Ground wire 1pc.

Sensor head connector cables

Model no.	ER-XCCJ2H	ER-XCCJ5H	ER-XCCJ10H
Image			
Length	2m	5m	10m

Note: Cable is not included in delivery. Please order separately

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

ER-X



ER-TF

Wide-area ionizer

Features

High function volume

Wide-area ionizer **ER-TF** effectively neutralizes electrostatic charge between different stages of production. The series is designed for stable operation and easy maintenance. The device is available in different lengths. Moreover, there is no need for compressed air, which makes installation easy and keeps costs under control.


Air flow can be set to 4 different speeds

The MAX setting quickly removes static charge over a wide area.




Flexible layout

The direction of the air output can be adjusted after mounting.




Safe design

Detection of entry to the discharger interrupts the high voltage circuit.



Easy maintenance

Discharge electrode needle units can be removed and attached quickly.




The fan air intake filter can be easily removed. This greatly reduces the time needed for cleaning.



- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index


Characteristics of ER-TF series

The layout of this ionizer allows it to be installed in a number of ways not possible for common, commercially available ionizers.

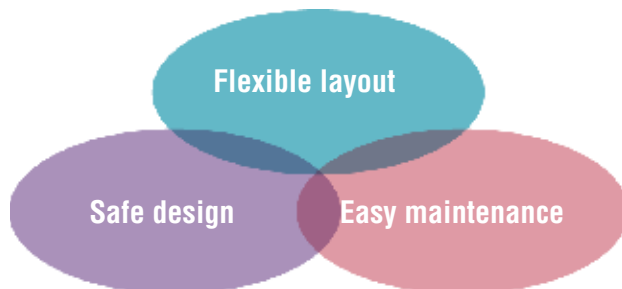


Typical applications


Desktop setup, 800mm type to accommodate wide workstation



400mm type for electrostatic discharge at a single workstation



Overhead setup to cover cell production



Technical specifications

Type	Area		
	ER-TF04-EX	ER-TF06-EX	ER-TF08-EX
Model no.	ER-TF04-EX	ER-TF06-EX	ER-TF08-EX
Charge removal time ($\pm 1000 \rightarrow \pm 100V$)	Approx. 1s		
Discharge output voltage	$\pm 6kV$		
Ion balance	Max. $\pm 10V$		
Discharge method	DC		
Power supply unit	Input voltage: 100 to 240 VAC, output voltage: 24VDC $\pm 10\%$		
Power consumption	Max. 80VA		
Fan rotation speed	Adjustable at 4 levels		
Output	ERROR, NPN open-collector transistor, max. 50mA		
Status display / Monitor functions of discharge unit	Supply voltage (Power / green), Discharge or fan error (Error / red), Maintenance (Check / orange)		
Status display on fan	Discharge unit error or maintenance (BAR / yellow), Fan error or maintenance (FAN / yellow)		
Ambient temperature	0 to +50°C, power supply unit 0 to +40°C		
Ambient humidity	35 to 65% RH		
Material	Housing discharge unit / Fan: ABS, Discharge electrode needles: tungsten, Mounting bracket: DD11		
Discharge unit dimensions (HxWxD)	65x414x60mm	65x574x60mm	65x734x60mm
Dimensions (HxWxD)	123x100x44mm		
Accessories	Power supply unit, Ground wire, Filter 5 pcs., Caution labels 2 pcs.		

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index




ER-VW

Nozzle angle adjustment

Features

■ Nozzle angle adjustment

The angles of the two nozzles can be adjusted within a range of approximately 190° by screwing down the ends of the nozzles.

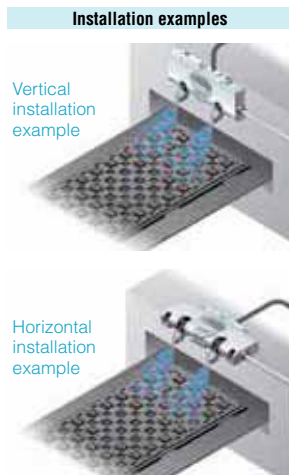

■ Compact and ultrathin design


The thickness of the unit is 18.9mm. Since the nozzle angles can be adjusted, they can be installed in tight spaces, such as when other equipment is present.



Includes angle adjustment scale


■ Minimum air consumption 15ℓ/min.

The **ER-VW** series can utilize air flow levels starting from a minimum of 15 l/min. Because the amount of air consumed is so low, the loads placed on air supply equipment can be reduced.



■ Air supply monitoring function


This function causes discharging to stop automatically if the supply of air drops below a certain pressure. Notification of this is given when the AIR indicator lights up and the discharge output (DSC) turns off. This prevents objects which are not charged from being overlooked when the air supply has been stopped.



■ Easy connection possible

The joint kit (optional) can be used to connect up to a maximum of 5 ER-VW units. The air supply part is connected via quick connection joints, and the power supply and input/output signals can also be connected easily using connection cables with connectors at both ends.

Multiple ER-VW units can be connected to provide charge removal layouts that suit the target equipment.

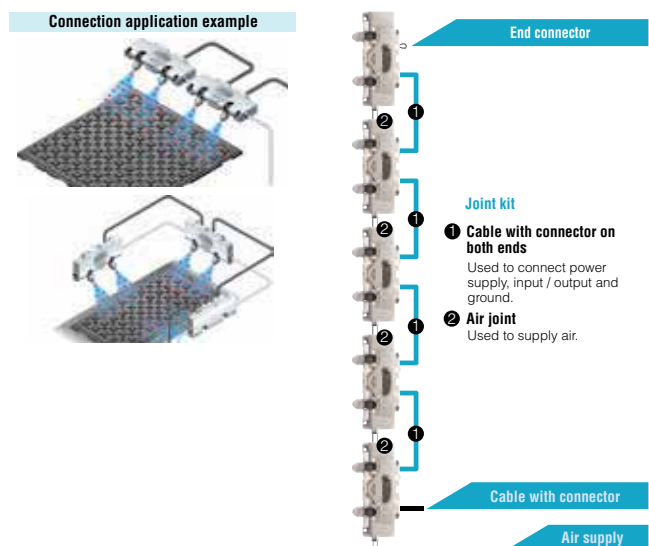

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors


Accessories

Index

ER-VW


Functions to support accurate charge removal

In addition to the air supply monitoring function, the ER-VW is equipped with the following functions to ensure accurate charge removal.

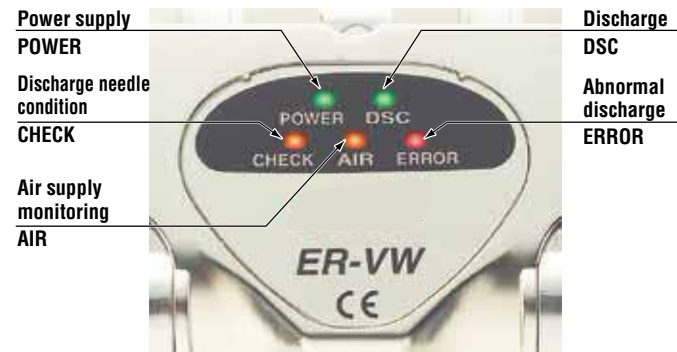

Typical applications


Charge removal of ICs




Removing charge during pickup from dicing type



Parallel discharging on two assembly lines



Removing charges from LCD transport brackets



Technical specifications

Type	Spot
Model no.	ER-VW
Charge removal time ($\pm 1000 \rightarrow \pm 100V$)	Max. 1s
Discharge output voltage	$\pm 2kV$
Ion balance	Max. $\pm 10V$
Discharge method	High frequency AC method
Power supply	24VDC $\pm 10\%$
Power consumption	Max. 120mA
Air pressure	0.5 to 5bar (0.05 to 0.50MPa)
Inputs	Reset and discharge stop = connected to 0V / Start= open
Outputs	Discharging (DSC), ERROR and CHECK; NPN open collector transistor; max. 50mA
Status indicators / Monitoring functions	Supply voltage (Power / green), Discharging (DSC / green), Checking electrode needles (Check / orange), Monitoring air pressure (Air / orange), Failure (Error / red)
Ambient temperature	0 to $+55^{\circ}C$
Ambient humidity	35 to 65%RH
Material	Enclosure: ABS (nickel plated), nozzles / nozzle mount, Screws: stainless steel, Discharge electrode needles: tungsten
Dimensions (HxWxD)	19x133x65mm
Accessories	Connector cable with 8 pins, 0.5m, Terminating plug with 9 pins, Ground wire

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index



ER-V

Ultra compact high-performance ionizer

Features

■ Produces excellent ion balance

The adoption of high-frequency AC method allows extremely stable ion balance to be achieved. Because the ion balance is not affected by the pressure of air supplied or by the setup distance, no troublesome adjustments are required after setup.

■ High performance but no controller needed

A full range of functions have been provided with full consideration given to ease of use in the workplace. No separate controller is needed.

■ Nozzle variations can be selected to suit the application



■ Ultra compact design accurately removes charges of objects even from narrow spaces

The main unit is merely 28x27x111.6mm so it can easily be combined with other devices and also be installed as an add-on. Furthermore, the high-voltage power supply is built-in so no extra space is required except for the ionizer itself.



It can be installed in places where the conventional bar type cannot so it can be placed closer to the object for more accurate charge removal.

Typical applications


Change removal and dust removal of lenses



Prevent discharge damage in circuit board LEDs



Charge removal glass surfaces



Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

ER-V







Technical specifications

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index

Type	Spot
Model no.	ER-VS02
Charge removal time (±1000 → ±100V)	Max. 1s
Discharge output voltage	±2kV
Ion balance	Max. ±10V
Discharge method	High frequency AC method
Power supply	24V DC ±10%
Power consumption	Max. 70mA
Maximum air pressure	0.5 to 7bar (0,05 to 0.7MPa)
Inputs	Reset and discharge stop = connected to 0V / Start= open
Outputs	Error (ERROR) and check (CHECK) NPN open-collector transistor, max. 50mA
Status indicators / Monitoring functions	Supply voltage (Power / green), Discharging (DSC / green), Checking electrode needles (Check / orange), Error (Error / red)
Ambient temperature	0 to +55°C
Ambient humidity	35 to 65%RH
Material	Enclosure: PPS, Cover: stainless steel, Discharge electrode needles: tungsten
Dimensions (HxWxD)	28x27x111.6mm
Accessories	I/O connector set manufactured by MOLEX, Inc.: Housing 5557-08P, terminal 5556TL


ER-V

Nozzles

Type	Shower nozzle	Straight bar nozzle			Shape-preserving tube				Conductive tube		
		ER-VAS	ER-VAB020	ER-VAB032	ER-VAB065	Tube nozzle adapter	ER-VAJK	ER-VAK10	ER-VAK30	ER-VAK50	Tube nozzle adapter
Image											
Length	Shower nozzle	Effective charge removal length 200mm	Effective charge removal length 320mm	Effective charge removal length 650mm	Tube nozzle adapter for main system and shape-preserving tube	Tube length 112mm	Tube length 312mm	Tube length 512mm	Tube nozzle adapter for main system and conductive tube	Tube length 500mm	
Description		Straight bar nozzle containing a series of holes				Bends easily and holds its bent shape so the tube does not need to be secured. (Minimum bending radius: 40mm)	Flexible, free-cut (Minimum bending radius: 15mm)				

Note: Nozzles are not supplied with the ionizer main unit. Please order them separately.

Cable with connector

Model no.	ER-VCCJ2	ER-VCCJ5	ER-VCCJ9
Image			
Length	2m	5m	9m
Net weight	approx. 52g	approx. 120g	approx. 240g
Description	0.15mm ² 8-core cable with connector Cable outer diameter: Ø4.2mm		

Note: The cable with connector is not supplied with the ionizer main unit. Please order it separately.




EC-G

Pulse air-gun ionizer

Features

■ Direct ionized air emission from air gun

With the new pulse air-gun ionizer operators can comfortably neutralize static electricity while manually cleaning.



■ Pulsed ionized air

Instant pulse air emission with high air pressure removes dust all at once. Its lightweight construction, ergonomic design and 2m cable make the air gun the perfect ionizer for manual jobs.



■ White LED illumination

A convenient white LED on the front of the gun illuminates target objects.



Technical specifications

Type	Air gun type
Model no.	EC-G02
Charge removal time ($\pm 1000 \rightarrow \pm 100V$)	Average 0.5s
Discharge output voltage	$\pm 1kV$
Ion balance	Max. $\pm 10V$
Discharge method	High frequency AC method
Power supply	Input voltage: 100 to 240V AC, output voltage: 24V DC $\pm 10\%$
Power consumption	Max. 30VA
Maximum air pressure	0.5 to 5bar (0.05 to 0.50MPa)
Input terminal	Charge removal start = connected to 0V
Modes	Pulse 1 (long) and Pulse 2 (short) / CONT (continuous) selectable by switch
LED illumination mode	White LED
Status indicator / Monitoring function	Valve illumination (orange)
Ambient temperature	0 to +50°C
Ambient humidity	35 to 65% RH (no condensation allowed)
Material	Enclosure: ABS, Nozzle: Stainless steel, Nozzle guard: NBR, Discharge electrode needle: tungsten
Weight	approx. 270g
Accessories	AC adapter, 1 pc.; Exclusive intermediate cable, 2m; Straight joints to couple air tubes $\varnothing 8-8mm$ (note) and $\varnothing 8-6mm$ type, Connector connection terminal from MOLEX

Note: Straight joint to couple air tubes, $\varnothing 8mm$, is attached at shipment

Typical applications

Remove charge and dust on PCB



Remove charge and dust on flat screens



Remove dust before painting



Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

EC-G

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index



EF-S1

Constant monitoring of static charges on production lines

Features

- **Maintains and regulates product quality by preventing damage from static electric**

Static electricity that can build up in various places along a process line can be monitored constantly so that abnormalities can be prevented before they occur, ensuring quality.

- **Reduces time for ionizer inspections**

The de-ionizing effectiveness of ionizers can be understood in real-time so that things such as ionizer damage and the replacement period for worn components can be checked objectively, reducing the time required for inspection and testing.

Technical specifications

- **Sensor head**

Type	Spot type
Model no.	EF-S1HS
Measuring range	8.0 to 20.5mm (±1kV) 21.0 to 100mm (±2kV)

- **Controller**


Type	Spot type
Model no.	EF-S1C
Power supply	24VDC ±10%
Display range (Measurement range)	-1000 to 1000 (±1kV) -1999 to 1999 (±2kV)
Judgment output	NPN open-collector transistor, max. 100mA
Analog voltage output	Output voltage 1 to 5V Output impedance approx. 100Ω

Typical applications


Measuring surface potential when removing BG sheets



















Measuring static electric charge in lead frames



Measuring frictional electrification of LCD modules
















Cables

Picture	Description	Model no.	Applicable sensors
	4-pin M8 connector cable, 2m	UZZ80820D	CX-4□Z,FX101□Z, FX102□Z, DP11□EPJ
	4-pin M8 connector cable (elbow type 90°), 2m	UZZ80821D	CX-4□Z, FX101□Z, FX102□Z, DP11□EPJ
	4-pin M8 connector cable, 5m	UZZ80850D	CX-4□Z,FX101□Z, FX102□Z, DP11□EPJ
	4-pin M8 connector cable (elbow type 90°), 5m	UZZ80851D	CX-4□Z,FX101PZ, FX102□Z, DP11□EPJ
	4-pin M12 connector cable, 2m	UZZ81220D	LX-101□Z, CX-4□Z, EQ-30, CY-1□Z, GX-M□-Z
	4-pin M12 connector cable (elbow type 90°), 2m	UZZ81221D	LX-101□Z, CX-4□Z, EQ-30, CY-1□Z, GX-M□-Z
	4-pin M12 connector cable, 5m	UZZ81250D	LX-101□Z, CX-4□Z, EQ-30, CY-1□Z, GX-M□-Z
	4-pin M12 connector cable (elbow type 90°), 5m	UZZ81251D	LX-101□Z, CX-4□Z, EQ-30, CY-1□Z, GX-M□-Z
	4-wire cable with connector, 2m	CN14AC2	PM-□65, DP-100, DP-0
	4-wire cable with connector, 5m	CN14AC5	PM-□65, DP-100, DP-0
	3-wire cable with connector, 1m	CN13C1	PM2
	3-wire cable with connector, 3m	CN13C3	PM2
	3-wire main cable, 2m	CN73C2	FX-301□, FX311, FX-5□1□, FX-CH2□, SC-GU-1-485
	3-wire main cable, 5m	CN73C5	FX-301□, FX311, FX-5□1□, FX-CH2□, SC-GU-1-485
	1-wire sub cable, 2m	CN71C2	FX-301□, FX-311, FX-501□
	1-wire sub cable, 5m	CN71C5	FX-301□, FX-311, FX-501□
	4-wire main cable, 2m	CN74C2	FX-305□, FX-502□, LS-401□, LS-501□
	4-wire main cable, 5m	CN74C5	FX-305□, FX-502□, LS-401□, LS-501□
	2-wire sub cable, 2m	CN72C2	FX-305□, FX-502□, LS-401□, LS-501□
	2-wire sub cable, 5m	CN72C5	FX-305□, FX-502□, LS-401□, LS-501□
	14-wire connecting cable, 2m	HL-G1CCJ2	HL-G1□-S-J
	14-wire connecting cable, 5m	HL-G1CCJ5	HL-G1□-S-J
	14-wire cable, 10m	HLG1CCJ10	HL-G1□-S-J
	14-wire cable, 20m	HLG1CCJ20	HL-G1□-S-J
	14-wire cable, 2m	HL-C2CCJ2	HL-C2□
	14-wire cable, 5m	HL-C2CCJ5	HL-C2□
	14-wire cable, 10m	HL-C2CCJ10	HL-C2□
	14-wire cable, 20m	HL-C2CCJ20	HL-C2□
	14-wire cable, 30m	HL-C2CCJ30	HL-C2□

- Photoelectric Sensors
- Fiber-optic Sensors
- Standard Fibers
- Fiber Sensors Communication Units
- Mark Sensors
- Laser Sensors
- Safety Sensors
- Pressure & Flow Sensors
- Inductive Proximity Sensors
- Measurement Sensors
- Ionizers / Electrostatic Sensors
- Accessories
- Index

Cable

Reflectors

Picture	Description	Model no.	Applicable reflectors
	Reflection foil: 8x30mm, thickness 0.7mm	RF11	CX-400, EX-20, NX5
	Reflection foil: 25x30mm, thickness 0.7mm	RF12	CX-400, EX-20, NX5
	Reflection foil: 30x30mm, thickness 0.5mm	RF13	CX-400
	Reflective area: 9.6x17.5mm	RF200	EX-20
	Reflective area: 12.8x33.3mm	RF210	CX-400, EX-L200, NX5
	Reflective area: 42.3x35.3mm	RF220	CX-400, NX5
	Reflective area: 59.3x50.3mm	RF230	CX-400, LS-H92□, NX5
	Reflective area: 7x8mm	RF310	LS
	Reflection foil: 27.8 x25.2mm	RF33	LS
	Reflective area: 23x24mm	RF330	EX-L200, LS-H91□, LS-H901
	Reflective area: 24x21mm	RF-420	CY-100
	Reflective area: 50x47mm	RF-410	CY-100
	Adhesive reflection tape: 22mm x 5m, thickness 0.4mm	RF-40RL5	CY-100

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors



Ionizers / Electrostatic Sensors

Accessories

Index

Reflectors

■ Mounting brackets

Picture	Description	Model no.	Applicable reflectors
	L-shaped mounting bracket	MS-EXL2-1	EX-L200, LS-H102
	Mounting plate	MSLX1	LX-100
	Mounting bracket	MSCX1	CX-400, LS-400
	Mounting bracket	MSCX21	CX-400
	Mounting bracket	MSNX51	NX5
	Mounting bracket	MS-EXZ-2	EX-Z Top sensing
	Mounting bracket	MS-EXZ-2	EX-Z Side sensing
	Mounting bracket	MSEX101	EX-10
	Mounting bracket	MSEX201	EX-20 Top sensing
	Mounting bracket	MSEX202	EX-20 Side sensing
	Mounting set, 4 mounting brackets M4(l=15mm) 4pcs., M4 (l=18mm) 8pcs.	MSNA11	NA1-11
	Mounting bracket	MSEQ501	EQ-500
	Mounting bracket	MSEQ31	EQ-30
	Mounting bracket	MSDIN4	FX-100
	Mounting bracket	MSDIN2	FX-300, FX-500
	Mounting bracket	MS-FM2-1	FM-200
	Mounting bracket	MSDP11	DP-100, DP-0
	Mounting bracket	MS-DP1-6	DPC-100, DPC-L100
	Mounting bracket, stainless steel	MS-CY1-1	CY-100
	Mounting bracket for beam axis alignment, plastic	MS-CY1-2	CY-100

Photoelectric Sensors

Fiber-optic Sensors

Standard Fibers

Fiber Sensors Communication Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure & Flow Sensors

Inductive Proximity Sensors

Measurement Sensors

Ionizers / Electrostatic Sensors

Accessories

Index

Mounting bracket

FD-FA93	53	FT-R40	44	G	HL-C201FE	109		
FD-H13-FM2	51	FT-R41W	45	GP-XC3SE	113	HL-C201FE-MK	109	
FD-H18-L31	51	FT-R42W	45	GP-XC3SEP	113	HL-C201F-MK	109	
FD-H20-M1	51	FT-R43	44	GP-XC5SE	113	HL-C203F	109	
FD-H25-L45	51	FT-R43	45	GP-XC5SEP	113	HL-C203FE	109	
FD-H30-KZ1V-S	52	FT-R44Y	45	GP-XC8S	113	HL-C203FE-MK	109	
FD-H30-L32	51	FT-R44Y	52	GP-XC8SP	113	HL-C203F-MK	109	
FD-H30-L32V-S	52	FT-R60Y	45	GP-XC10M	113	HL-C205B	109	
FD-H35-M2	51	FT-R60Y	52	GP-XC10MP	113	HL-C205BE-MK	109	
FD-HF40Y	53	FT-S11	46	GP-XC12ML	113	HL-C205BE	109	
FD-L10	50	FT-S20	43	GP-XC12MLP	113	HL-C205B-MK	109	
FD-L11	50	FT-S21	46	GP-XC22KL	113	HL-C205C	109	
FD-L12W	50	FT-S21W	46	GP-XC22KLP	113	HL-C205CE-MK	109	
FD-L20H	50	FT-S30	43	GX-F6 (-A/-B)(-I)(-P)	101	HL-C205CE	109	
FD-L21	50	FT-S31W	46	GX-F8 (-A/-B)(-I)(-P)	101	HL-C205C-MK	109	
FD-L21W	50	FT-S32	46	GX-F12 (-A/-B)(-I)(-P)	101	HL-C208B	109	
FD-L22A	50	FT-V23	47	GX-F15(-A/-B)(-I)(-P)	101	HL-C208BE-MK	109	
FD-L23	50	FT-V25	47	GX-FL15 (-A/-B)(-I)(-P)	101	HL-C208BE	109	
FD-L30A	50	FT-V30	47	GX-H6 (-A/-B)(-I)(-P)	101	HL-C208B-MK	109	
FD-L31A	50	FT-V40	46	GX-H8 (-A/-B)(-I)(-P)	101	HL-C208C	109	
FD-L32H	50	FT-V80Y	52	GX-H12 (-A/-B)(-I)(-P)	101	HL-C208C-MK	109	
FD-R31G	45	FT-Z20HBW	48	GX-H15 (-A/-B)(-I)(-P)	101	HL-C208CE	109	
FD-R32EG	45	FT-Z20W	48	GX-HL15 (-A/-B)(-P)(-Z)	101	HL-C208C-MK	109	
FD-R33EG	45	FT-Z30	48	GX-M8 (-A/-B)(-P)(-Z)	99	HL-C211F	109	
FD-R41	45	FT-Z30E	48	GX-M8(-A/-B)-U	99	HL-C211F5	109	
FD-R60	44	FT-Z30EW	48	GX-M12 (-A/-B)(-P)(-Z)	99	HL-C211F5E	109	
FD-R61Y	45	FT-Z30H	48	GX-M12(-A/-B)-U (-Z)	99	HL-C211F5E-MK	109	
FD-S21	46	FT-Z30HW	48	GX-M18 (-A/-B)(-P)(-Z)	99	HL-C211F5-MK	109	
FD-S30	43	FT-Z30W	48	GX-M18(-A/-B)-U (-Z)	99	HL-C211FE	109	
FD-S31	46	FT-Z40HBW	48	GX-M30 (-A/-B)(-P)(-Z)	99	HL-C211FE-MK	109	
FD-S32	46	FT-Z40W	48	GX-M30(-A/-B)-U (-Z)	99	HL-C211F-MK	109	
FD-S32W	46	FT-Z802Y	52	GX-MK12 (-A/-B)(-P)(-Z)	99	HL-C235CE-W	109	
FD-S33GW	46	FV-LE1	54	GX-MK18 (-A/-B)(-P)(-Z)	99	HL-C235CE-WMK	109	
FD-S60Y	46	FV-SV2	54	GX-MK30 (-A/-B)(-P)(-Z)	99	HL-G1CCJ2	127	
FD-V30	47	FX-101-CC2	35	GX-ML8(-A/-B)-U	99	HL-G1CCJ5	127	
FD-V50	47	FX-101P-CC2	35	GX-ML12(-A/-B)-U (-Z)	99	HLG1CCJ10	127	
FD-Z20HBW	48	FX-101P (-Z)	35	GX-ML18(-A/-B)-U (-Z)	99	HLG1CCJ20	127	
FD-Z20W	48	FX-101 (-Z)	35	GX-ML18(-A/-B)-U (-Z)	99	HL-G103-A-C5	107	
FD-Z40HBW	48	FX-102-CC2	35	GX-ML30 (-A/-B)-U (-Z)	99	HL-G103-RA-C5	107	
FD-Z40W	48	FX-102P-CC2	35			HL-G103-RS-J	107	
FR-KZ22E	50	FX-102P (-Z)	35	H	HG-C1030	105	HL-G103-S-J	107
FR-KZ50E	50	FX-102 (-Z)	35	HG-C1030	105	HL-G105-A-C5	107	
FR-KZ50H	50	FX-301(/-B/-G/-H)	37	HG-C1030-P	105	HL-G105-RA-C5	107	
FR-Z50HW	50	FX-301(/-B/-G/-H)P	37	HG-C1050	105	HL-G105-RS-J	107	
FT-30	43	FX-301-HS	37	HG-C1050-P	105	HL-G105-S-J	107	
FT-31	44	FX-301P-HS	37	HG-C1100	105	HL-G108-A-C5	107	
FT-31S	47	FX-311	38	HG-C1100-P	105	HL-G108-RS-J	107	
FT-40	43	FX-311P	38	HG-S1010	103	HL-G108-S-J	107	
FT-42S	47	FX-501	40	HG-S1010R	103	HL-G112-A-C5	107	
FT-43	44	FX-501P	40	HG-S1110	103	HL-G112-S-J	107	
FT-140	44	FX-502	40	HG-S1110R	103	HL-G125-A-C5	107	
FT-A11	49	FX-502P	40	HG-SC101	103	HL-G125-S-J	107	
FT-A11W	49	FX-505-C2	40	HG-SC101-P	103	HL-G-RA-C5	107	
FT-A32	49	FX-505P-C2	40	HG-SC111	103	HL-T1001A(F)	111	
FT-A32W	49	FX-551	40	HG-SC111-P	103	HL-T1005A(F)	111	
FT-AL05	49	FX-551-C2	40	HG-SC112	103	HL-T1010A(F)	111	
FT-E13	46	FX-551P	40	HG-SC112-P	103	LS-401	63	
FT-E23	46	FX-551P-C2	40	HL-AC1	111	LS-401-C2	63	
FT-E23	47	FX-LE1	54	HL-AC1P	111			
FT-F93	53	FX-LE2	54	HL-C2C	109			
FT-H13-FM2	51	FX-MR1	55	HL-C2CCJ2	127			
FT-H20-J20-S	51	FX-MR2	55	HL-C2CCJ5	127	LS-401P	63	
FT-H20-J30-S	51	FX-MR3	55	HL-C2CCJ10	127	LS-401P-C2	63	
FT-H20-J50-S	51	FX-MR5	55	HL-C2CCJ20	127	LS-501	65	
FT-H20-VJ50-S	51	FX-MR6	55	HL-C2CCJ30	127	LS-501-C2	65	
FT-H20-VJ80-S	51	FX-MR7	55	HL-C2CE	109	LS-501P	65	
FT-H20W-M1	51	FX-MR8	55	HL-C2CE-P	109	LS-501P-C2	65	
FT-H30-M1V-S	52	FX-MR9	55	HL-C2C-P	109	LS-H21(F) (-A)	63	
FT-H35-M2	51	FX-SV1	54	HL-C21C	109	LS-H22(F)	63	
FT-HL80Y	52			HL-C21CE	109	LS-H91(F) (-A)	63	
FT-L80Y	52			HL-C21CE-P	109	LS-H92(F)	63	
FT-R31	45			HL-C21C-P	109	LS-H101	65	
FT-R34EG	45			HL-C201F	109	LS-H102	65	

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

	LS-H201	65	PM2-LF10-C1	24	PM-U25-R	21	SF2B-A48-P	69
Photoelectric Sensors	LS-H901	65	PM2-LF10-C1	24	PM-Y45	21	SF2B-A48SL	69
	LX-101	59	PM2-LH10	24	PM-Y45-C3	21	SF2B-H8-N	69
Fiber-optic Sensors	LX-101-P	59	PM2-LH10	24	PM-Y45-P	21	SF2B-H8-P	69
	LX-101-P-Z	59	PM2-LH10B	24	PM-Y45-P-C3	21	SF2B-H8SL	69
Standard Fibers	LX-101-Z	59	PM2-LH10B	24	PM-Y65	21	SF2B-H12-N	69
			PM2-LH10B-C1	24	PM-Y65-P	21	SF2B-H12-P	69
Fiber Sensors Communication Units	M		PM2-LH10B-C1	24			SF2B-H12SL	69
	MQ-W3A(R)	28	PM2-LH10-C1	24	R		SF2B-H16-N	69
Mark Sensors	MQ-W3C(R)	28	PM2-LH10-C1	24	RF11	128	SF2B-H16-P	69
	MQ-W20A(R)	28	PM2-LL10	24	RF12	128	SF2B-H16SL	69
	MQ-W20C(R)	28	PM2-LL10	24	RF13	128	SF2B-H20-N	69
Laser Sensors	MQ-W70A1224EMJ	28	PM2-LL10B	24	RF33	128	SF2B-H20-P	69
	MQ-W70C1224EMJ	28	PM2-LL10B	24	RF40RL5	128	SF2B-H20SL	69
Safety Sensors			PM2-LL10B-C1	24	RF200	128	SF2B-H24-N	69
	MSCX1	129	PM2-LL10B-C1	24	RF210	128	SF2B-H24-P	69
	MSCX21	129	PM2-LL10-C1	24	RF220	128	SF2B-H24SL	69
Pressure & Flow Sensors	MS-CY1-1	129	PM2-LL10-C1	24	RF230	128	SF2B-H28-N	69
	MS-CY1-2	129	PM-F25	21	RF310	128	SF2B-H28-P	69
Inductive Proximity Sensors	MSDIN2	129	PM-F25-C3	21	RF330	128	SF2B-H28SL	69
	MSDIN4	129	PM-F25-P	21	RF410	128	SF2B-H32-N	69
Measurement Sensors	MS-DP1-6	129	PM-F25-R	21	RF420	128	SF2B-H32-P	69
	MSDP11	129	PM-F45	21			SF2B-H32SL	69
Ionizers / Electrostatic Sensors	MSEQ31	129	PM-F45-C3	21	S		SF2B-H36-N	69
	MSEQ501	129	PM-F45-P	21	SD3-A1	80	SF2B-H36-P	69
Accessories	MSEX101	129	PM-F45-P-C3	21	SF2B-A4-N	69	SF2B-H40-N	69
	MSEX201	129	PM-F65	21	SF2B-A4-P	69	SF2B-H40-P	69
	MSEX202	129	PM-F65-P	21	SF2B-A4SL	69	SF2B-H40SL	69
Index	MS-EXL2-1	129	PM-F65W	21	SF2B-A6-N	69	SF2B-H48-N	69
	MS-EXZ-2	129	PM-F65W-P	21	SF2B-A6-P	69	SF2B-H48-P	69
	MS-EXZ-2	129	PM-K25	21	SF2B-A6SL	69	SF2B-H48SL	69
	MS-FM2-1	129	PM-K25-C3	21	SF2B-A8-N	69	SF2B-H56-N	69
	MSLX1	129	PM-K25-P	21	SF2B-A8-P	69	SF2B-H56-P	69
	MSNA11	129	PM-K25-R	21	SF2B-A8SL	69	SF2B-H56SL	69
	MSNX51	129	PM-K45	21	SF2B-A10-N	69	SF2B-H64-N	69
	MS-SFCH-8	71	PM-K45-C3	21	SF2B-A10-P	69	SF2B-H64-P	69
	MS-SFCH-12	71	PM-K45-P	21	SF2B-A10SL	69	SF2B-H64SL	69
	MS-SFCH-16	71	PM-K45-P-C3	21	SF2B-A12-N	69	SF2B-H72-N	69
	MS-SFCH-20	71	PM-K65	21	SF2B-A12-P	69	SF2B-H72-P	69
	MS-SFCH-24	71	PM-K65-P	21	SF2B-A12SL	69	SF2B-H72SL	69
	MS-SFCH-28	71	PM-L25	21	SF2B-A14-N	69	SF2B-H80-N	69
	MS-SFCH-32	71	PM-L25-C3	21	SF2B-A14-P	69	SF2B-H80-P	69
	MS-SQ-21	82	PM-L25-P	21	SF2B-A14SL	69	SF2B-H80SL	69
	MS-SQ-22	82	PM-L25-R	21	SF2B-A16-N	69	SF2B-H88-N	69
	MS-SQ-23	82	PM-L45	21	SF2B-A16-P	69	SF2B-H88-P	69
	MS-SQ-24	82	PM-L45-C3	21	SF2B-A16SL	69	SF2B-H88SL	69
			PM-L45-P	21	SF2B-A18-N	69	SF2B-H96-N	69
			PM-L45-P-C3	21	SF2B-A18-P	69	SF2B-H96SL	69
			PM-L65	21	SF2B-A18SL	69	SF2C-H8-N	71
N	NA1-11	30	PM-L65-P	21	SF2B-A20-N	69	SF2C-H8-P	71
	NA1-11-PN	30	PM-R25	21	SF2B-A20-P	69	SF2C-H12-N	71
	NA1-PK3	32	PM-R25-C3	21	SF2B-A20SL	69	SF2C-H12-P	71
	NA1-PK3-PN	32	PM-R25-P	21	SF2B-A24-N	69	SF2C-H16-N	71
	NA1-PK5	32	PM-R25-R	21	SF2B-A24-P	69	SF2C-H16-P	71
	NA1-PK5-PN	32	PM-R45	21	SF2B-A24SL	69	SF2C-H20-N	71
	NX5-D700A	9	PM-R45-C3	21	SF2B-A28-N	69	SF2C-H20-P	71
	NX5-D700B	9	PM-R45-P	21	SF2B-A28-P	69	SF2C-H24-N	71
	NX5-M10RA	9	PM-R45-P-C3	21	SF2B-A28SL	69	SF2C-H24-P	71
	NX5-M10RB	9	PM-R65	21	SF2B-A32-N	69	SF2C-H28-N	71
	NX5-M30A	9	PM-R65-P	21	SF2B-A32-P	69	SF2C-H28-P	71
	NX5-M30B	9	PM-R65W	21	SF2B-A32SL	69	SF2C-H32-N	71
	NX5-PRVM5A	9	PM-R65W-P	21	SF2B-A36-N	69	SF2C-H32-P	71
	NX5-PRVM5B	9	PM-T45	21	SF2B-A36-P	69	SF4B-A6(V2)	74
	NX5-RM7A	9	PM-T45-C3	21	SF2B-A36SL	69	SF4B-A8C	76
	NX5-RM7B	9	PM-T45-P	21	SF2B-A40-N	69	SF4B-A8CA-J05	76
			PM-T45-P-C3	21	SF2B-A40-P	69	SF4B-A8(V2)	74
			PM-T45W-P	21	SF2B-A40SL	69	SF4B-A10(V2)	74
P	PM2-LF10	24	PM-T65	21	SF2B-A44-N	69	SF4B-A12C	76
	PM2-LF10	24	PM-T65-P	21	SF2B-A44-P	69	SF4B-A12CA-J05	76
	PM2-LF10B	24	PM-T65-W	21	SF2B-A44SL	69	SF4B-A12(V2)	74
	PM2-LF10B	24	PM-U25	21	SF2B-A48-N	69	SF4B-A14(V2)	74
	PM2-LF10B-C1	24	PM-U25-C3	21				
	PM2-LF10B-C1	24	PM-U25-P	21				

SF4B-A16C	76	SF4B-H72(V2)	74
SF4B-A16CA-J05	76	SF4B-H80C	76
SF4B-A16(V2)	74	SF4B-H80CA-J05	76
SF4B-A18(V2)	74	SF4B-H80(V2)	74
SF4B-A20C	76	SF4B-H88C	76
SF4B-A20CA-J05	76	SF4B-H88CA-J05	76
SF4B-A20(V2)	74	SF4B-H88(V2)	74
SF4B-A24C	76	SF4B-H96C	76
SF4B-A24CA-J05	76	SF4B-H96CA-J05	76
SF4B-A24(V2)	74	SF4B-H96(V2)	74
SF4B-A28C	76	SF4C-F15	78
SF4B-A28CA-J05	76	SF4C-F15-J05	78
SF4B-A28(V2)	74	SF4C-F23	78
SF4B-A32C	76	SF4C-F23-J05	78
SF4B-A32CA-J05	76	SF4C-F31	78
SF4B-A32(V2)	74	SF4C-F31-J05	78
SF4B-A36C	76	SF4C-F39	78
SF4B-A36CA-J05	76	SF4C-F39-J05	78
SF4B-A36(V2)	74	SF4C-F47	78
SF4B-A40C	76	SF4C-F47-J05	78
SF4B-A40CA-J05	76	SF4C-F55	78
SF4B-A40(V2)	74	SF4C-F55-J05	78
SF4B-A44C	76	SF4C-F63	78
SF4B-A44CA-J05	76	SF4C-F63-J05	78
SF4B-A44(V2)	74	SF4C-H8	78
SF4B-A48C	76	SF4C-H8-J05	78
SF4B-A48CA-J05	76	SF4C-H12	78
SF4B-A48(V2)	74	SF4C-H12-J05	78
SF4B-F23(V2)	74	SF4C-H16	78
SF4B-F31(V2)	74	SF4C-H16-J05	78
SF4B-F39(V2)	74	SF4C-H20	78
SF4B-F47(V2)	74	SF4C-H20-J05	78
SF4B-F55(V2)	74	SF4C-H24	78
SF4B-F63(V2)	74	SF4C-H24-J05	78
SF4B-F71(V2)	74	SF4C-H28	78
SF4B-F79(V2)	74	SF4C-H28-J05	78
SF4B-F95(V2)	74	SF4C-H32	78
SF4B-F111(V2)	74	SF4C-H32-J05	78
SF4B-F127(V2)	74	SF-C21	85
SF4B-H12C	76	SG-A1	84
SF4B-H12CA-J05	76	SG-B1	84
SF4B-H12(V2)	74	SG-B2	84
SF4B-H16C	76	SG-C1	84
SF4B-H16CA-J05	76	SG-D1	84
SF4B-H16(V2)	74	SG-E1	84
SF4B-H20C	76	SQ4-C11	82
SF4B-H20CA-J05	76	ST4-A1-J1	67
SF4B-H20(V2)	74	ST4-A1-J1V	67
SF4B-H24C	76	ST4-A1-J02	67
SF4B-H24CA-J05	76	ST4-A1-J02V	67
SF4B-H24(V2)	74	ST4-C11	67
SF4B-H28C	76	ST4-C12EX	67
SF4B-H28CA-J05	76		
SF4B-H28(V2)	74		
SF4B-H32C	76	U	
SF4B-H32CA-J05	76	UZZ80820D	127
SF4B-H32(V2)	74	UZZ80821D	127
SF4B-H36C	76	UZZ80850D	127
SF4B-H36CA-J05	76	UZZ80851D	127
SF4B-H36(V2)	74	UZZ81220D	127
SF4B-H40C	76	UZZ81221D	127
SF4B-H40CA-J05	76	UZZ81250D	127
SF4B-H40(V2)	74	UZZ81251D	127
SF4B-H48C	76		
SF4B-H48CA-J05	76		
SF4B-H48(V2)	74		
SF4B-H56C	76		
SF4B-H56CA-J05	76		
SF4B-H56(V2)	74		
SF4B-H64C	76		
SF4B-H64CA-J05	76		
SF4B-H64(V2)	74		
SF4B-H72C	76		
SF4B-H72CA-J05	76		

Photoelectric
SensorsFiber-optic
Sensors

Standard Fibers

Fiber Sensors
Communication
Units

Mark Sensors

Laser Sensors

Safety Sensors

Pressure &
Flow SensorsInductive
Proximity
SensorsMeasurement
SensorsIonizers/
Electrostatic
Sensors

Accessories

Index

Panasonic Electric Works offers a wide product range from one source, from individual components to complete systems. Technology support for advice, design-in, installation and commissioning by our qualified application engineers round off the Panasonic service profile.



Human machine interfaces

Our compact size, bright and easy-to-read human machine interfaces can be used to visualize inspection results. Touch panels can even replace the standard keypad if you so desire.



UV curing systems

Aicure **UJ30** is a LED curing system that quickly hardens UV-sensitive resins such as adhesives, ink and coatings. Its cutting edge LED technology is especially suited for precise, high-intensity curing.



ACD components

Components such as **Eco-POWER METERS**, timers/counters, temperature controllers, limit switches and fans round off our wide factory automation product range.



Programmable controllers

Programmable controllers from Panasonic represent "control advantages" that pay for themselves right from the start.



Servo drives

Panasonic servo drives enable high performance motion control to be applied to almost all types of machines, including chip mounting machines and general industrial machines.



Laser Markers

Panasonic Laser Markers are ideal for non-contact, permanent labeling of most materials, e.g. metal, plastics, glass, paper, wood and leather. Several CO₂ laser marking systems and a unique FAYb fiber laser marker can be easily integrated into existing production systems for a great variety of marking tasks.



North America

Europe

Asia Pacific

China

Japan

Panasonic Electric Works

Please contact our Global Sales Companies in:

Europe

▶ Headquarters	Panasonic Electric Works Europe AG	Robert-Koch-Straße 100, 85521 Ottobrunn, Tel. +49 89 45354-1000, Fax +49 89 45354-2111, www.panasonic-electric-works.com
▶ Austria	Panasonic Electric Works Austria GmbH	Josef Madersperger Str. 2, 2362 Biedermannsdorf, Tel. +43 (0) 2236-26846, Fax +43 (0) 2236-46133 www.panasonic-electric-works.at
	Panasonic Industrial Devices Materials Europe GmbH	Ennsstafelstraße 30, 4470 Enns, Tel. +43 (0) 7223 883, Fax +43 (0) 7223 88333, www.panasonic-electronic-materials.com
▶ Benelux	Panasonic Electric Works Sales Western Europe B.V.	De Rijn 4, (Postbus 211), 5684 PJ Best, (5680 AE Best), Netherlands, Tel. +31 (0) 499 372727, Fax +31 (0) 499 372185, www.panasonic-electric-works.nl
▶ Czech Republic	Panasonic Electric Works Europe AG, organizační složka	Administrative centre PLATINIUM, Veveří 3163/111, 616 00 Brno, Tel. +420 541 217 001, Fax +420 541 217 101, www.panasonic-electric-works.cz
▶ France	Panasonic Electric Works Sales Western Europe B.V.	Succursale française, 10, rue des petits ruisseaux, 91370 Verrières Le Buisson, Tél. +33 (0) 1 6013 5757, Fax +33 (0) 1 6013 5758, www.panasonic-electric-works.fr
▶ Germany	Panasonic Electric Works Europe AG	Robert-Koch-Straße 100, 85521 Ottobrunn, Tel. +49 89 45354-1000, Fax +49 89 45354-2111, www.panasonic-electric-works.de
▶ Hungary	Panasonic Electric Works Europe AG	Magyarországi Közvetlen Kereskedelmi Képviselet, 1117 Budapest, Neumann János u. 1., Tel. +43 2236 26846-25, Mobile: +36 20 264 9896, Fax +43 2236 46133, www.panasonic-electric-works.hu
▶ Ireland	Panasonic Electric Works UK Ltd.	Irish Branch Office, Dublin, Tel. +353 (0) 14600969, Fax +353 (0) 14601131, www.panasonic-electric-works.co.uk
▶ Italy	Panasonic Electric Works Italia srl	Via del Commercio 3-5 (Z.I. Ferlina), 37012 Bussolengo (VR), Tel. +39 0456752711, Fax +39 0456700444, www.panasonic-electric-works.it
▶ Nordic Countries	Panasonic Electric Works Europe AG Panasonic Eco Solutions Nordic AB	Filial Nordic, Knarrarnäsgatan 15, 164 40 Kista, Sweden, Tel. +46 859476680, Fax +46 859476690, www.panasonic-electric-works.se
▶ Poland	Panasonic Electric Works Polska sp. z o.o.	Jungmansgatan 12, 21119 Malmö, Tel. +46 40 697 7000, Fax +46 40 697 7099, www.panasonic-fire-security.com
▶ Spain	Panasonic Electric Works España S.A.	ul. Wotowska 9A, 02-583 Warszawa, Tel. +48 22 338-11-33, Fax +48 22 338-12-00, www.panasonic-electric-works.pl
▶ Switzerland	Panasonic Electric Works Schweiz AG	Barajas Park, San Severo 20, 28042 Madrid, Tel. +34 913293875, Fax +34 913292976, www.panasonic-electric-works.es
▶ United Kingdom	Panasonic Electric Works UK Ltd.	Grundstrasse 8, 6343 Rotkreuz, Tel. +41 (0) 41 7997050, Fax +41 (0) 41 7997055, www.panasonic-electric-works.ch
		Sunrise Parkway, Linford Wood, Milton Keynes, MK14 6LF, Tel. +44 (0) 1908 231555, Fax +44 (0) 1908 231599, www.panasonic-electric-works.co.uk

North & South America

▶ USA	Panasonic Industrial Devices Sales Company of America	Two Riverfront Plaza, 7th Floor, Newark, NJ 07102-5490, Tel. 1-8003-442-112, www.pewa.panasonic.com
--------------	--	---

Asia Pacific / China / Japan

▶ China	Panasonic Electric Works Sales (China) Co. Ltd.	Tower C 3rd Floor, Office Park, NO.5 Jinghua South Street, Chaoyang District, Beijing 100020, Tel. +86-10-5925-5988, Fax +86-10-5925-5980
▶ Hong Kong	Panasonic Industrial Devices Sales (HK) Co., Ltd.	Suite 301, 3/F, Chinachem Golden Plaza, 77 Mody Road, TST East, Kowloon, Hong Kong, Tel. +852-2529-3956, Fax +852-2528-6991
▶ Japan	Panasonic Corporation	1006, Oaza Kadoma, Kadoma-shi, Osaka 571-8501, Japan, Tel. +81-6-6908-1121, www.panasonic.net
▶ Singapore	Panasonic Industrial Devices Automation Controls Sales Asia Pacific	No.3 Bedok South Road, Singapore 469269, Tel. +65-6299-9181, Fax +65-6390-3953